
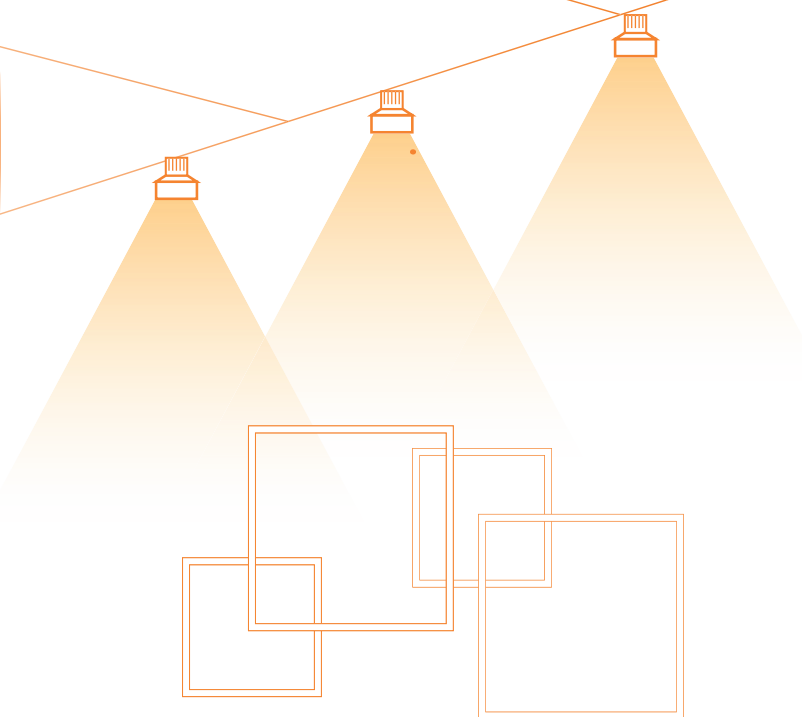


LED


LUMINAIRES

INDOOR + COMMERCIAL

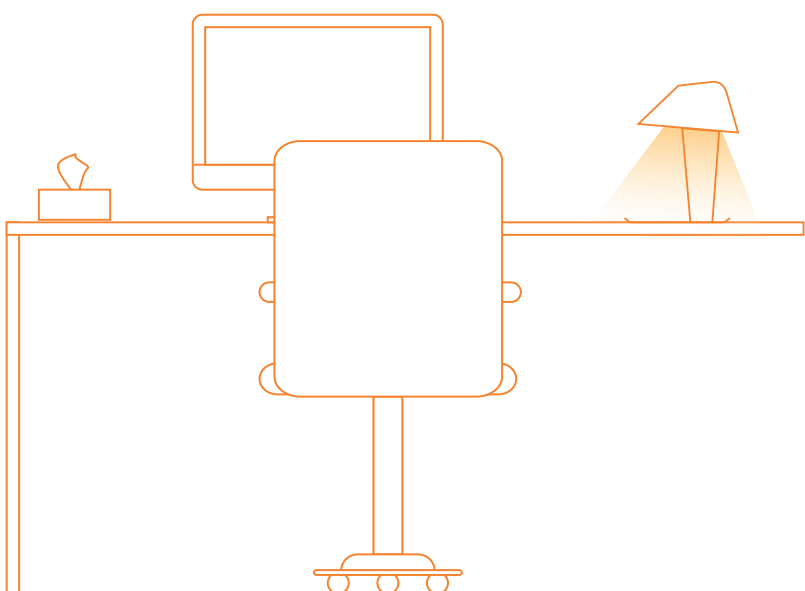

ROOMLUX®
my light. my choice

V.04 2022

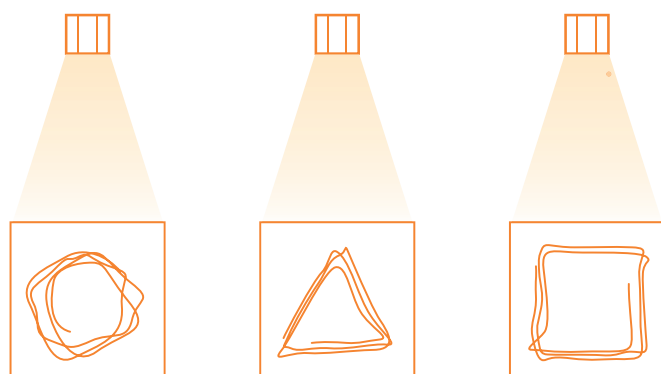



ABOUT US

Early since 1990's, Roomlux has engaged in the lighting industry. Starting from traditional incandescent bulb, halogen lamp, fluorescent tube, etc., it has been keeping close pace with development of science and new technology.

Through almost 30 years dedication, Roomlux has built up professional teams and established long term strategy partnership with its carefully selected supply chain plants, most of which are front runners in specific category of products.

In year 2010, Roomlux invested and set up new R&D center and manufacturing base, with land area of 33,300sqm and floor area of 22,000sqm, focusing on research and development and aiming at providing the best LED lighting products.

Roomlux is now serving clients from more than 85 countries and supplying thousands of products covering residential, commercial, industrial and solar lighting, from normal electric bulbs to up-to-date high-tech lighting system.

Abiding by the philosophy of 'Customer First, Pursuit of Perfection', Roomlux has become a reputable name for its wide and comprehensive products collection, superior quality, competitive price and reliable service.

To bring brightness and happiness to every corner of the world, Roomlux shall devote itself to this will and would like to invite clients to join hands with us, to achieve glory and success together.



Sales office



Research and Development



Exhibition



Exhibition



Workshop



Workshop



Automatic Assemble Machine



Aging Test

INDEX

DOWNLIGHT

Wifi	2
Bluetooth	3
Scene Switch	4
Slim	5
Anti - Glare	6
Light Source Replaceable	7
Tiltable	8
24°	10
High Power	11
Emergency	12
Fire Rated	14
Ceiling Spotlight	18
GU10 Fixture	27

PANEL LIGHT

Smart	37
Ultia Slim	39
Frameless	43
Anti-Glare	43
Edge-Lit	45
Back-Lit	49

CEILING LIGHT

Smart	51
Standard	53
Remote Control	54

PENDANT LIGHT

Pendant Light	56
---------------------	----

TRACK LIGHT

Track Light	59
-------------------	----

TRI-PROOF LIGHT

Tri-Proof	63
-----------------	----

BATTEN & LINER LIGHT

Batten Light	68
Grill Fitting	72

EMERGENCY LIGHT

Exit Sign	75
Emergency Light	80



DOWNLIGHT



SMART·SCENE SWITCH·SLIM·ANTI-GLARE·LIGHT SOURCE REPLACEABLE·TILTABLE
24°·HIGH POWER·EMERGENCY·FRIE RATED·CEILING SPOTLIGHT·GU10 FIXTURE

ROOMLUX's LED Downlights are manufactured with industry-leading components to deliver an exceptional performance, making them the perfect choice for efficient indoor lighting. Each unit is designed and made of diecast Aluminium and Thermal Plastic for extreme durability. With the different IP grade, all the downlights in this series could be used in different locations.



Downlight

SMART - WIFI DOWNLIGHT



Voice Control



Customized
Group Control



Timer



Family
Sharing Access



Dimming



RGB+2700-6500K



B27784 - ALU.+PC

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
3" 8W	120/230V	720Lm	100°	CCT	>80	A+	Matt White	IP20	113x58mm	92mm	25,000H
3" 8W	120/230V	720Lm	100°	RGB+CCT	>80	A+	Matt White	IP20	113x58mm	92mm	25,000H

Downlight












SMART - BLUETOOTH DOWNLIGHT



- ⚡ New Generation Bluetooth Mesh Technology
- ⬇ ON/OFF/DIM/CCT adjustment (Dimmable via Bluetooth only, not for use with in-wall dimmer)
- 📱 Control your lights by APP
- ✱ Simple installation and service



B27780 - ALU. HOUSING + PC DIFFUSER

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
2.5" 5W	120/230V	350Lm	100°	RGB+CCT	>80	A+	Matt White	IP20	109x43mm	75mm	25,000H
3.5" 9W	120/230V	700Lm	100°	RGB+CCT	>80	A+	Matt White	IP20	120x45mm	95mm	25,000H



Downlight

SCENE SWITCH DOWNLIGHT



3-IN-1 DIMMING Brightness:100%-50%-15%



Create your own scene with one bulb, by simply using your existing switch, No additional installation of Dimmer

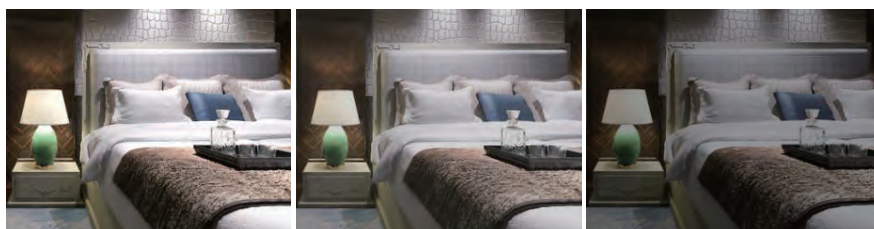

3-IN-1 CCT CHANGE

CCT Changing:
● 3000K-4000K-6500K ● 6500K-4000K-3000K

Change the setting from a bright light, to a cozy warm glow, to a neutral light,
No dimmer or additional installation is required. All you need is your existing switch.

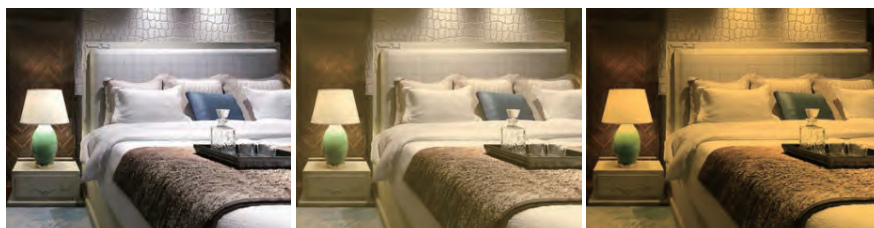

B27715 - 3-IN-1 DIMMING

B27716 - 3-IN-1 CCT CHANGE

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
3" 7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	Matt White	IP20	100x43mm	75mm	25,000H
3.5" 10W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	Matt White	IP20	115x52mm	85mm	25,000H
4" 15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	Matt White	IP20	138x53mm	95mm	25,000H
5.5" 20W	120/230V	1600Lm	120°	3000/4000/6500K	>80	A+	Matt White	IP20	175x53mm	140mm	25,000H
7" 30W	120/230V	2400Lm	120°	3000/4000/6500K	>80	A+	Matt White	IP20	225x54mm	175mm	25,000H

Downlight

SLIM DOWNLIGHT



A stylish light range for your modern interiors

- Thermal conductive plastic coated aluminum housing, V-0 flame rating.
- Driver built-in, integrated design.
- Non dimmable/ Presettable tri-white and triac dimmable available.
- 3000K, 4000K, 6000K for option.
- Warranty: 3 years.
- L70 to 45000hrs.



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



IP GRADE



ØxH



CUTOUT



LIFE

1 B27798 - 3" / 4"

3" 5W	120/230V	460Lm	120°	3000/4000/6500K	>80	A+	White	IP20	95x57mm	68mm	25,000H
3" 7W	120/230V	650Lm	120°	3000/4000/6500K	>80	A+	White	IP20	95x57mm	68mm	25,000H
4" 8W	120/230V	700Lm	120°	3000/4000/6500K	>80	A+	White	IP20	113x58mm	90mm	25,000H
4" 10W	120/230V	950Lm	120°	3000/4000/6500K	>80	A+	White	IP20	113x58mm	90mm	25,000H

2 B27803 - 5" / 6"

5" 12W	120/230V	1150Lm	120°	3000/4000/6500K	>80	A+	White	IP20	145x65mm	120mm	25,000H
5" 14W	120/230V	1240Lm	120°	3000/4000/6500K	>80	A+	White	IP20	145x65mm	120mm	25,000H
6" 17W	120/230V	1650Lm	120°	3000/4000/6500K	>80	A+	White	IP20	174x68mm	145mm	25,000H

3 B27805 - 8"

8" 20W	120/230V	2000Lm	120°	3000/4000/6500K	>80	A+	White	IP20	244x84mm	195mm	25,000H
8" 25W	120/230V	2450Lm	120°	3000/4000/6500K	>80	A+	White	IP20	244x84mm	195mm	25,000H

Downlight

ANTI-GLARE DOWNLIGHT



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



IP GRADE



ØxH



CUTOUT



LIFE

1 B27807 - 3" / 4"

3" 5W	120/230V	460Lm	120°	3000/4000/6500K	>80	A+	White	IP20	95x57mm	68mm	25,000H
3" 7W	120/230V	650Lm	120°	3000/4000/6500K	>80	A+	White	IP20	95x57mm	68mm	25,000H
4" 8W	120/230V	700Lm	120°	3000/4000/6500K	>80	A+	White	IP20	113x58mm	90mm	25,000H
4" 10W	120/230V	950Lm	120°	3000/4000/6500K	>80	A+	White	IP20	113x58mm	90mm	25,000H

2 B27809 - 5" / 6"

5" 12W	120/230V	1150Lm	120°	3000/4000/6500K	>80	A+	White	IP20	145x65mm	120mm	25,000H
5" 14W	120/230V	1240Lm	120°	3000/4000/6500K	>80	A+	White	IP20	145x65mm	120mm	25,000H
6" 17W	120/230V	1650Lm	120°	3000/4000/6500K	>80	A+	White	IP20	174x68mm	145mm	25,000H

3 B27811 - 8"

8" 20W	120/230V	2000Lm	120°	3000/4000/6500K	>80	A+	White	IP20	244x84mm	195mm	25,000H
8" 25W	120/230V	2450Lm	120°	3000/4000/6500K	>80	A+	White	IP20	244x84mm	195mm	25,000H

Downlight












LIGHT SOURCE REPLACEABLE



- Replaceable light source.
- High brightness, ideal for commercial areas.
- High impact thermal plastic housing, more durable.
- Different kind of packing at option



B27788

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
2" 7W	120/230V	600Lm	38°	3000/4000/6500K	>80	A+	White	IP20	90x47mm	68mm	25,000H


Downlight

TILTABLE DOWNLIGHT

- High quality PMMA lens ensures focused and natural light
- PC Housing and built-in driver, unbreakable and compact



- PMMA lens
- PC housing

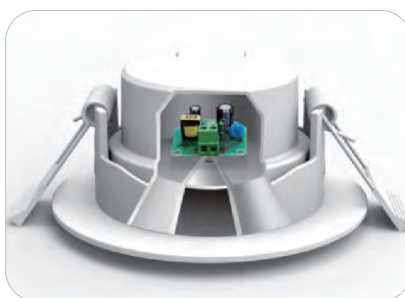












- Built-in driver
- Anti electric shock



- High heat dissipation

B27370 - TILTABLE 2" 3W / 3" 5W / 3" 7W / 3.5" 10W

B27360 - NON-TILTABLE 2" 3W / 3" 5W / 3" 7W / 3.5" 10W

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 IP GRADE	 ØxH	 CUTOUT	 LIFE
2" 3W	120/230V	240Lm	38°	3000/4000/6500K	>80	A+	White	IP20	75x45mm	55mm	25,000H
3" 5W	120/230V	400Lm	38°	3000/4000/6500K	>80	A+	White	IP20	90x45mm	70mm	25,000H
3" 7W	120/230V	520Lm	38°	3000/4000/6500K	>80	A+	White	IP20	90x45mm	70mm	25,000H
3.5" 10W	120/230V	800Lm	38°	3000/4000/6500K	>80	A+	White	IP20	120x45mm	90mm	25,000H

Downlight

TILTABLE DOWNLIGHT


- High quality PMMA lens ensures focused and natural light
- PC Housing and built-in driver, unbreakable and compact
- Ideal LED replacement for directional halogen spots



- PMMA lens
- PC housing





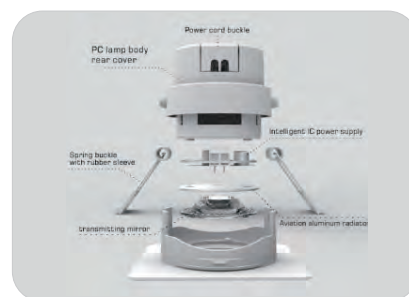








- large angle
- No glare
- Seismic fall



Structure decomposition diagram

B27372 - **TILTABLE** 2" 3W / 3" 5W / 3" 7W / 3.5" 10W

B27362 - **NON-TILTAAABLE** 2" 3W / 3" 5W / 3" 7W / 3.5" 10W

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	LxWxH	CUTOUT	LIFE
2" 3W	120/230V	240Lm	38°	3000/4000/6500K	>80	A+	White	IP20	75x45mm	55mm	25,000H
3" 5W	120/230V	400Lm	38°	3000/4000/6500K	>80	A+	White	IP20	90x45mm	70mm	25,000H
3" 7W	120/230V	520Lm	38°	3000/4000/6500K	>80	A+	White	IP20	90x45mm	70mm	25,000H
3.5" 10W	120/230V	800Lm	38°	3000/4000/6500K	>80	A+	White	IP20	120x45mm	90mm	25,000H

Downlight

24° DOWNLIGHT














- > Die-casting Alu.
- > Anti-glare design
- > No Flicker

Cover Option:



B27730 - ALU. HOUSING + REFLECTOR












	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 IP GRADE	 ØxH	 CUTOUT	 LIFE
3" 6W	120/230V	480Lm	24°	3000/4000/6500K	>80	A+	White/Grey/Black	IP20	85x74mm	75mm	25,000H
4" 10W	120/230V	800Lm	24°	3000/4000/6500K	>80	A+	White/Grey/Black	IP20	85x74mm	75mm	25,000H


Downlight

HIGH POWER DOWNLIGHT







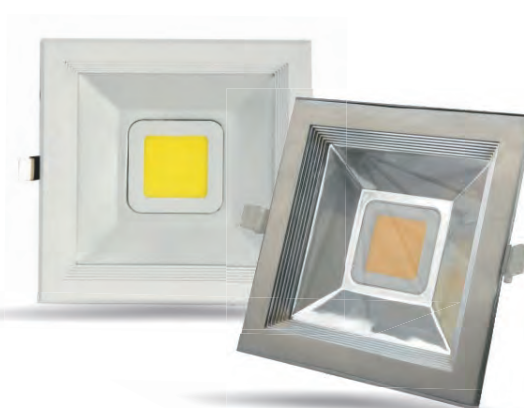






B27700 - 2.5" 8W / 3" 10W / 4" 15W / 5" 20W / 6" 30W

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
2.5" 8W	120/230V	720Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	105x50mm	80mm	25,000H
3" 10W	120/230V	900Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	130x45mm	95mm	25,000H
4" 15W	120/230V	1350Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	173x45mm	138mm	25,000H
5" 20W	120/230V	1800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	195x45mm	158mm	25,000H
6" 30W	120/230V	2700Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	223x45mm	195mm	25,000H



B27705 - 2.5" 8W / 3" 10W / 4" 15W / 5" 20W / 6" 30W

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	WxLxH	CUTOUT	LIFE
2.5" 8W	120/230V	720Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	105x105x50mm	85x85mm	25,000H
3" 10W	120/230V	900Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	130x130x45mm	100x100mm	25,000H
4" 15W	120/230V	1350Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	173x173x45mm	132x132mm	25,000H
5" 20W	120/230V	1800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	190x190x45mm	165x165mm	25,000H
6" 30W	120/230V	2700Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	223x223x45mm	195x195mm	25,000H

Downlight

EMERGENCY DOWNLIGHT



- Emergency LED downlight
- 170Lm for 2 hours emergency duration
- Rechargeable Nickel Metal hydride battery
- Complies with IEC60598-2-22



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



IP GRADE



ØxH



CUTOUT



LIFE

1 B68700

4.5W	120/230V	170Lm	100°	3000/4000/6500K	>80	A+	White	IP20	130x19mm	120mm	25,000H
------	----------	-------	------	-----------------	-----	----	-------	------	----------	-------	---------

2 B68702

4.5W	120/230V	170Lm	100°	3000/4000/6500K	>80	A+	White	IP20	84x19mm	70mm	25,000H
------	----------	-------	------	-----------------	-----	----	-------	------	---------	------	---------

3 B68704

4.5W	120/230V	170Lm	100°	3000/4000/6500K	>80	A+	White	IP20	220x220x53mm	/	25,000H
------	----------	-------	------	-----------------	-----	----	-------	------	--------------	---	---------

Downlight

EMERGENCY DOWNLIGHT



1



2



1 B68706

2.8W	120/230V	200Lm	120°	3000/4000/6500K	>80	A+	White	IP20	40x31mm	15mm	25,000H
------	----------	-------	------	-----------------	-----	----	-------	------	---------	------	---------

2 B68708

3W	120/230V	200Lm	120°	3000/4000/6500K	>80	A+	White	IP20	84x23mm	70mm	25,000H
5W	120/230V	350Lm	120°	3000/4000/6500K	>80	A+	White	IP20	84x23mm	70mm	25,000H

Downlight

FIRE RATED DOWNLIGHT



Product Show



DIY Colorful Exchangeable Bezels Optional
URG<14 Anti Glare Downlight



B27755 - 5W

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
5W	120/230V	450Lm	36°	3000/4000/6500K	>80	A+	White/Black	IP44	92x58mm	82mm	25,000H

Downlight

FIRE RATED DOWNLIGHT

FLICKER FREE

Protecting the eyesight of your family, making your life healthier.



- High impact resistant Aluminum housing.
- Matt finish design, more elegant.
- With pre-fitted spring clips, very easy and quick installation.
- Different color of reflector for option.

FAST CONNECTOR

Easy to installation.



B27760 - 5W

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
5W	120/230V	450Lm	36°	3000/4000/6500K	>80	A+	White/Black	IP54	92x58mm	82mm	25,000H

Downlight

FIRE RATED DOWNLIGHT



30-60-90 Min
Fire Rated



Durable Clip Fittings



CCT Light Control














Hi Impact Quick Connector



Industry - Leading Steel and
Die Casting Aluminum








B27730 - 15W

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
15W	120/230V	1200Lm	36°	3000/4000/6500K	>80	A+	White/Black	IP54	92x58mm	82mm	25,000H



30-60-90 Min
Fire Rated

B27735 - 10W

							
	VOLT	LUMENS	BEAM	CCT	ØxH	CUTOUT	LIFE
10W	120/230V	800Lm	24°/36°/60°	3000/4000/6500K	91x68mm	82mm	25,000H



IP65



A+



Ra>80

Downlight

FIRE RATED DOWNLIGHT

30-60-90 Min
Fire Rated



B27740 - 10W



IP65



EEL



Ra>80



VOLT



LUMENS



BEAM



CCT



ØxH



CUTOUT



LIFE

10W	120/230V	800Lm	15°/24°/36°	3000/4000/6500K	90x59mm	82mm	25,000H
-----	----------	-------	-------------	-----------------	---------	------	---------

30-60-90 Min
Fire Rated



B27745 - 10W



IP44



A+



Ra>80



VOLT



LUMENS



BEAM



CCT



ØxH



CUTOUT



LIFE

10W	120/230V	800Lm	15°/24°/36°	3000/4000/6500K	90x75mm	82mm	25,000H
-----	----------	-------	-------------	-----------------	---------	------	---------

30-60-90 Min
Fire Rated



B27750 - 10W



IP20



A+



Ra>80



VOLT



LUMENS



BEAM



CCT



ØxH



CUTOUT



LIFE

10W	120/230V	800Lm	15°/24°/36°	3000/4000/6500K	90x80mm	83mm	25,000H
-----	----------	-------	-------------	-----------------	---------	------	---------

Downlight

CEILING SPOTLIGHT



Black



Silver



Golden



Titanium Silver

A stylish light range for your modern interiors

- Reflective efficiency : 72-86%
- Anti-fire and anti UV PC housing
- 3000/4000/6500K CCT changeable by DIP switch
- Reflector or lens are available for perfect light effect
- DOB & COB integration design make quality stable












CCT Adjustable
With DIP Switch



B27762 - STANDARD

B27763 - 3-IN-1 CCT CHANGE



	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 IP GRADE	 ØxH	 CUTOUT	 LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H

Downlight

CEILING SPOTLIGHT



CCT Adjustable
With DIP Switch

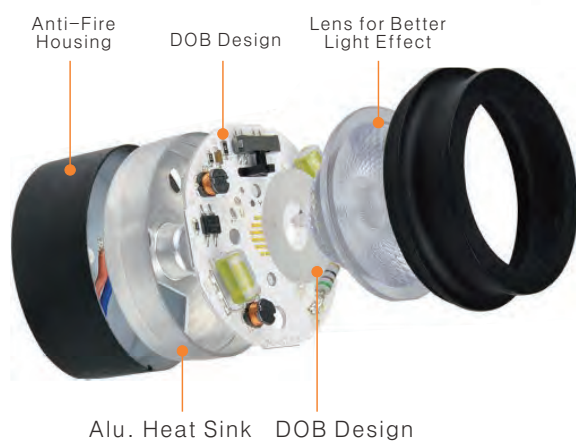

Black



Silver



Golden













Titanium Silver

A stylish light range for your modern interiors

- Independent light source module design, perfectly match different fixture, gives various combinations.
- High reflectivity and high light transmittance . Both reflector and lens at option.


B27764 - STANDARD

B27765 - 3-IN-1 CCT CHANGE

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 IP GRADE	 ØxH	 CUTOUT	 LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H

Downlight

CEILING SPOTLIGHT

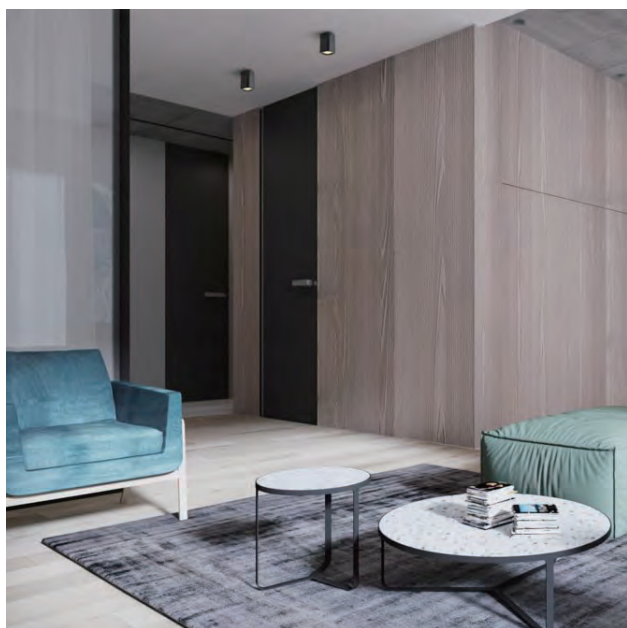

A stylish light range for your modern interiors

- Reflective efficiency :72-86%
- Anti-fire and anti UV PC housing
- Reflector or lens are available for perfect light effect
- DOB & COB integration design make quality stable



Striation-Black



Black



Silver













Titanium Silver



Golden

B27766 - STANDARD

B27767 - 3-IN-1 CCT CHANGE

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 IP GRADE	 ØxH	 CUTOUT	 LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	72x103mm	/	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	72x103mm	/	25,000H

Downlight

CEILING SPOTLIGHT



Black



Silver



Titanium Silver



Golden












A stylish light range for your modern interiors

- Independent light source module design, perfectly match different fixture, gives various combinations.
- High reflectivity and high light transmittance . Both reflector and lens at option.

B27768 - STANDARD

B27769 - 3-IN-1 CCT CHANGE

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 IP GRADE	 ØxH	 CUTOUT	 LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	76x100mm	/	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	76x100mm	/	25,000H

Downlight

CEILING SPOTLIGHT



Black



White



Black Reflector











A stylish light range for your modern interiors

- With PC diffuser, given uniform light.
- Adjustable design, focus the light easily.
- Anti-glare design, popular in shopping mall.
- Both Blister and color box packing available.




B27770 - STANDARD

B27771 - 3-IN-1 CCT CHANGE

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 IP GRADE	 ØxH	 CUTOUT	 LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H

Downlight

CEILING SPOTLIGHT

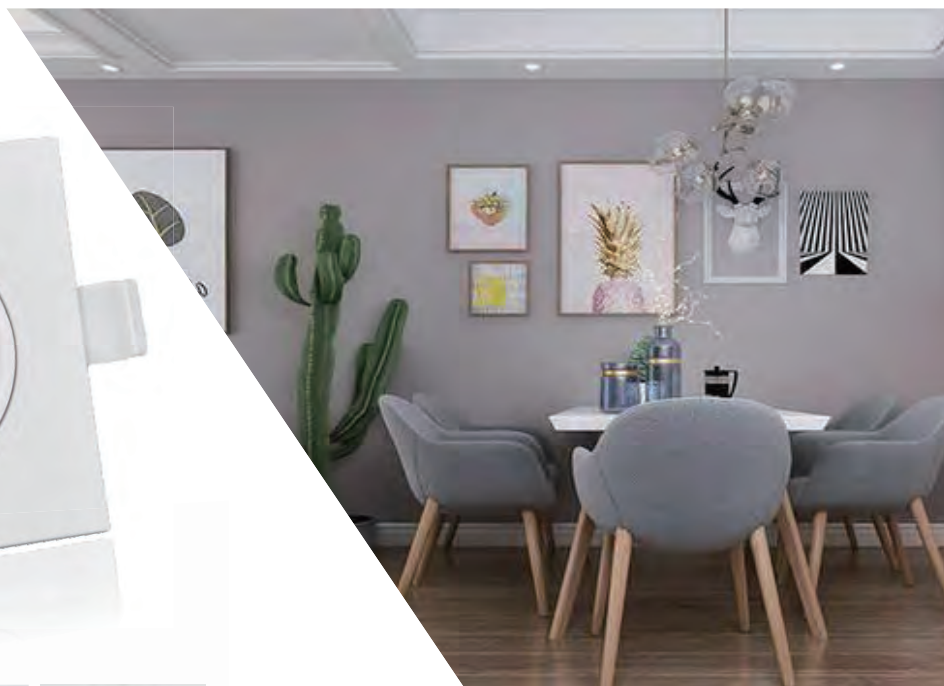

Black



White



Black Reflector











A stylish light range for your modern interiors

- Thermal conductive plastic coated aluminum housing, V-0 flame rating.
- Driver built-in, integrated design.
- Non dimmable/ Presetable tri-white and triac dimmable available.



B27772 - STANDARD

B27773 - 3-IN-1 CCT CHANGE

										
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	ØxH	CUTOUT	LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H

Downlight

CEILING SPOTLIGHT



Black

Golden

Silver













A stylish light range for your modern interiors

- With PC diffuser, given uniform light.
- Adjustable design, focus the light easily.

B27774 - STANDARD

B27775 - 3-IN-1 CCT CHANGE

										
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	ØxH	CUTOUT	LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x75mm	75mm	25,000H

Downlight

CEILING SPOTLIGHT



Black



White













Black Reflector

A stylish light range for your modern interiors

- With PC diffuser, given uniform light.
- Adjustable design, focus the light easily.
- Anti-glare design, popular in shopping mall.
- Both Blister and color box packing available.

B27776 - STANDARD

B27777 - 3-IN-1 CCT CHANGE

										
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	ØxH	CUTOUT	LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x155mm	75x155mm	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x155mm	75x155mm	25,000H


Downlight

CEILING SPOTLIGHT



A stylish light range for your modern interiors

- Thermal conductive plastic coated aluminum housing, V-0 flame rating.
- Driver built-in, integrated design.
- Non dimmable/ Presettable tri-white and triac dimmable available.



Black













White



Black Reflector

B27778 - STANDARD

B27779 - 3-IN-1 CCT CHANGE

										
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	ØxH	CUTOUT	LIFE
2.5" 5W	120/230V	400Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x235mm	75x230mm	25,000H
2.5" 7W	120/230V	600Lm	15°/38°	3000/4000/6500K/CCT	>80	A+	IP20/IP54	88x235mm	75x230mm	25,000H



Downlight

RECESSED GU10 FIXTURE



- High impact resistant polycarbonate housing.
- Matt finish design, more elegant.
- With pre-fitted spring clips, very easy and quick installation.
- Different color of reflector for option.
- Holder: GU10/GU5.3

D27300



ØxH: 88x32mm



CUTOUT: Ø75-80mm



UGR <10



INSTALLATION: Back Side Insert



COLOR: White/Black/Silver/Bronze/Golden



Downlight

RECESSED GU10 FIXTURE



D27320



ØxH: 86x40mm



CUTOUT: Ø70-75mm



UGR <13



INSTALLATION: Back Side Insert

D27325



ØxH: 85x35mm



CUTOUT: Ø70-75mm



UGR <13



INSTALLATION: Back Side Insert

D27330



ØxH: 88x32mm



CUTOUT: Ø75-80mm



UGR <10



INSTALLATION: Back Side Insert

Downlight

RECESSED GU10 FIXTURE



Face Side Insert

High impact resistant polycarbonate housing. Matt finish design, more elegant.



Back Side Insert

High impact resistant polycarbonate housing. Matt finish design, more elegant.



D27335

	ØxH: 110x29mm
	CUTOUT: Ø75-100mm
	UGR <10
	INSTALLATION: Face Side Insert



D27340

	ØxH: 90x27mm
	CUTOUT: Ø70-75mm
	UGR <10
	INSTALLATION: Face Side Insert



D27345

	ØxH: 110x29mm
	CUTOUT: Ø75-100mm
	UGR <10
	INSTALLATION: Back Side Insert



D27350

	ØxH: 110x29mm
	CUTOUT: Ø75-100mm
	UGR <10
	INSTALLATION: Back Side Insert

Downlight

RECESSED GU10 FIXTURE



D27355

	ØxH: 90x29mm
	CUTOUT: Ø75-80mm
	UGR <13
	INSTALLATION: Back Side Insert



D27360

	ØxH: 110x27mm
	CUTOUT: Ø75-100mm
	UGR <10
	INSTALLATION: Back Side Insert



D27365

	ØxH: 90x27mm
	CUTOUT: Ø75-80mm
	UGR <10
	INSTALLATION: Back Side Insert



D27370

	ØxH: 90x27mm
	CUTOUT: Ø75-80mm
	UGR <10
	INSTALLATION: Back Side Insert



D27375

	ØxH: 95x53mm
	CUTOUT: Ø85mm
	UGR <13
	INSTALLATION: Back Side Insert



D27380

	ØxH: 93x53mm
	CUTOUT: Ø85mm
	UGR <13
	INSTALLATION: Back Side Insert



D27385

	LxWxH: 93x93x53mm
	CUTOUT: L85xW85mm
	UGR <13
	INSTALLATION: Back Side Insert



D27390

	LxWxH: 93x93x53mm
	CUTOUT: L85xW85mm
	UGR <13
	INSTALLATION: Back Side Insert



Downlight

RECESSED GU10 FIXTURE



ANTI - GLARE GU10 FRAME

High impact resistant polycarbonate housing.
Matt finish design, more elegant.

D27395



ØxH: 88x32mm



CUTOUT: Ø75-80mm



UGR <10



INSTALLATION: Back Side Insert

D27400



ØxH: 88x32mm



CUTOUT: Ø75-80mm



UGR <10



INSTALLATION: Back Side Insert

Downlight

RECESSED GU10 FIXTURE



D27435

	LxWxH: 93x93x27mm
	CUTOUT: L80xW80mm
	UGR <10
	INSTALLATION: Face Side Insert



D27440

	LxWxH: 173x93x27mm
	CUTOUT: L160xW80mm
	UGR <10
	INSTALLATION: Face Side Insert



D27445

	LxWxH: 240x93x27mm
	CUTOUT: L240xW80mm
	UGR <10
	INSTALLATION: Face Side Insert



D27450

	LxWxH: 93x93x29mm
	CUTOUT: L85xW85mm
	UGR <13
	INSTALLATION: Back Side Insert



D27455

	LxWxH: 173x93x29mm
	CUTOUT: L160xW80mm
	UGR <13
	INSTALLATION: Back Side Insert



D27460

	LxWxH: 240x93x29mm
	CUTOUT: L240xW80mm
	UGR <13
	INSTALLATION: Back Side Insert

Downlight

RECESSED GU10 FIXTURE



D27465



LxWxH: 93x93x27mm



CUTOUT: L85xW85mm



UGR <10



INSTALLATION: Back Side Insert



D27470



LxWxH: 173x93x27mm



CUTOUT: L160xW80mm



UGR <10



INSTALLATION: Back Side Insert



D27475



LxWxH: 240x93x27mm



CUTOUT: L240xW80mm



UGR <10



INSTALLATION: Back Side Insert



D27480



LxWxH: 93x93x27mm



CUTOUT: Ø75-85mm



UGR <10



INSTALLATION: Back Side Insert



D27485



LxWxH: 173x93x27mm



CUTOUT: L160xW80mm



UGR <10



INSTALLATION: Back Side Insert



D27490



LxWxH: 240x93x27mm



CUTOUT: L240xW80mm



UGR <10



INSTALLATION: Back Side Insert



Downlight

SURFACE MOUNTED GU10 FIXTURE



D27405

	ØxH: 96x100mm
	CUTOUT: /
	UGR <10
	INSTALLATION: Back Side Insert



D27420

	LxWxH: 96x96x100mm
	CUTOUT: /
	UGR <10
	INSTALLATION: Back Side Insert



D27410

	ØxH: 96x100mm
	CUTOUT: /
	UGR <10
	INSTALLATION: Back Side Insert



D27425

	LxWxH: 96x96x100mm
	CUTOUT: /
	UGR <10
	INSTALLATION: Back Side Insert



D27415

	ØxH: 96x100mm
	CUTOUT: /
	UGR <10
	INSTALLATION: Back Side Insert



D27430

	LxWxH: 96x96x100mm
	CUTOUT: /
	UGR <10
	INSTALLATION: Back Side Insert

Downlight

METAL GU10 FIXTURE



D27431



ØxH: 85x21mm



CUTOUT: 68mm



Steel/Aluminum



MR16/GU10/Ø50mm Module



D27432



ØxH: 100x27mm



CUTOUT: 73mm



Steel/Aluminum



MR16/GU10/Ø50mm Module



D27433



ØxH: 80x13mm



CUTOUT: 53mm



Steel/Aluminum



MR16/GU10/Ø50mm Module



D27434



ØxH: 80x13mm



CUTOUT: 53mm



Steel/Aluminum



MR16/GU10/Ø50mm Module



D27435



ØxH: 80x13mm



CUTOUT: 53mm




Steel/Aluminum



MR16/GU10/Ø50mm Module

PANEL LIGHT



SMART·ULTIA SLIM·FRAMELESS·ANTI-GLARE·EDGE-LIT·BACK-LIT

ROOMLUX's LED panels range are all made with top-quality PMMA diffusers which provides a uniformly distributed light and prevents the panels from turning yellow. It proves its durability with exteriors composed of an innovative combination of Aluminum+PMMA+PP. Both frameless and big panels are inclusive of exist wire for easy installation.



Panel Light

SMART - WIFI PANEL LIGHT



RGB+2700-6500K
16M Colors



Customized+DIY
Scenes



Dimming



Customized
Group Control



Family
Sharing Access



RGB



Timer



Mobile APP Control



Voice Control

1 B29706 - RECESSED MOUNT

2 B29721 - SURFACE MOUNT



NON-DIM

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	ØxH	CUTOUT	LIFE
18W	120/230V	1260Lm	120°	RGB+CCT/CCT	>80	A+	IP20	225x13mm 225x30mm	180mm	25,000H
24W	120/230V	1680Lm	120°	RGB+CCT/CCT	>80	A+	IP20	300x13mm 300x30mm	278mm	25,000H

3 B29716 - RECESSED MOUNT

4 B29726 - SURFACE MOUNT



NON-DIM

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	LxWxH	CUTOUT	LIFE
18W	120/230V	1260Lm	120°	RGB+CCT/CCT	>80	A+	IP20	225x225x13mm 225x225x30mm	176x176mm	25,000H
24W	120/230V	1680Lm	120°	RGB+CCT/CCT	>80	A+	IP20	300x300x13mm 300x300x30mm	204x204mm	25,000H

Panel Light

SMART - WIFI PANEL LIGHT



- Both Silver and White frame are available.
- UGR <22 or UGR <19 at option.
- High quality PMMA LGP, no yellowing problem.
- Lifud or other branded driver are available.



B29717 - RECESSED MOUNT

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	LxWxH	LIFE
24W	120/230V	1920Lm	120°	RGB+CCT/CCT	>80	A+	IP20	300x300x10/450x450x10mm	25,000H
36W	120/230V	2880Lm	120°	RGB+CCT/CCT	>80	A+	IP20	450x450x10/600x600x10/620x620x10mm	25,000H
48W	120/230V	3840Lm	120°	RGB+CCT/CCT	>80	A+	IP20	600x600x10/620x620x10mm	25,000H



B29718 - RECESSED MOUNT

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	IP GRADE	LxWxH	LIFE
15W	120/230V	1200Lm	120°	RGB+CCT/CCT	>80	A+	IP20	300x600x10mm	25,000H
24W	120/230V	1920Lm	120°	RGB+CCT/CCT	>80	A+	IP20	300x600x10/300x1200x10mm	25,000H
36W	120/230V	2880Lm	120°	RGB+CCT/CCT	>80	A+	IP20	300x600x10/300x1200x10mm	25,000H

Panel Light

ULTRA SLIM PLASTIC PANEL LIGHT

A stylish light range for your modern interiors

- Anti UV PC material, more durable.
- Comply with new ErP, TUV certificate available.



IP20 & IP54 at Option



CCT Adjustable
With DIP Switch



3000K












6000K



B29780 - IP20

B29781 - IP54



											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
5W	120/230V	500Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	95x26mm	75mm	25,000H
9W	120/230V	900Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	120x26mm	90mm	25,000H
12W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	145x26mm	120mm	25,000H
18W	120/230V	1800Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	170x26mm	140mm	25,000H
24W	120/230V	2400Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	220x26mm	205mm	25,000H

Panel Light

ULTRA SLIM PLASTIC PANEL LIGHT














A stylish light range for your modern interiors

- Anti UV PC material, more durable.
- Comply with new ErP, TUV certificate available.

B29782 - IP20

B29783 - IP54



	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 IP GRADE	 DxH	 CUTOUT	 LIFE
5W	120/230V	500Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	95x26mm	75mm	25,000H
9W	120/230V	900Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	120x26mm	90mm	25,000H
12W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	145x26mm	120mm	25,000H
18W	120/230V	1800Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	170x26mm	140mm	25,000H
24W	120/230V	2400Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	220x26mm	205mm	25,000H

Panel Light


SURFACE MOUNTED PLASTIC PANEL LIGHT



Structure Description:





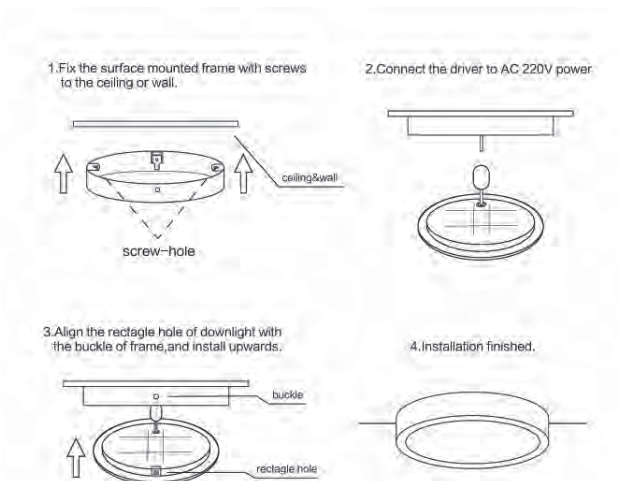








Installation Instruction:



B29784 - IP20



B29785 - IP54



	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 IP GRADE	 ØxH	 CUTOUT	 LIFE
9W	120/230V	900Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	120x26mm	90mm	25,000H
12W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	145x26mm	120mm	25,000H
18W	120/230V	1800Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	170x26mm	140mm	25,000H
24W	120/230V	2400Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	220x26mm	205mm	25,000H

Panel Light

SURFACE MOUNTED PLASTIC PANEL LIGHT

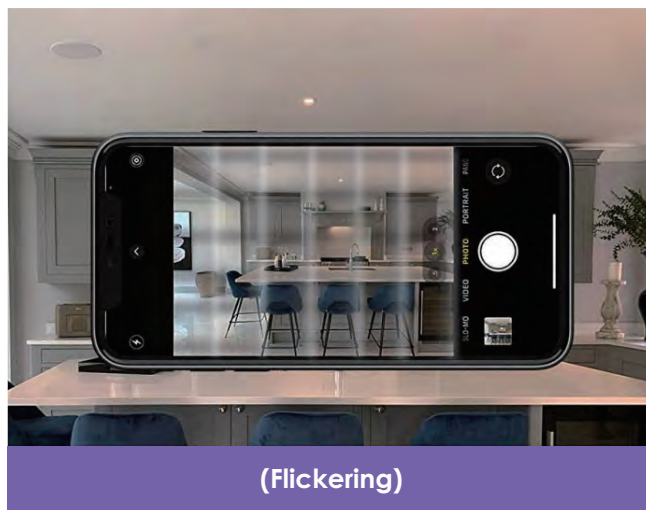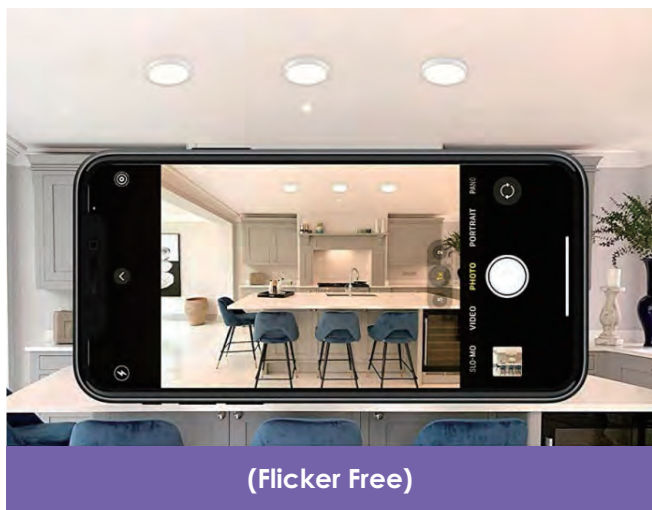

Recessed+Frame=Surface Mounted














A stylish light range for your modern interiors

- With PC diffuser, given uniform light.
- Perfect replacement of traditional panel light.

B29786 - IP20

B29787 - IP54



	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 IP GRADE	 DxH	 CUTOUT	 LIFE
9W	120/230V	900Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	120x26mm	90mm	25,000H
12W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	145x26mm	120mm	25,000H
18W	120/230V	1800Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	170x26mm	140mm	25,000H
24W	120/230V	2400Lm	120°	3000/4000/6500K	>80	A+	White	IP20/IP54	220x26mm	205mm	25,000H

Panel Light

FRAMELESS PANEL LIGHT



Die-Casting aluminum
for better heatsink.














Strong snap spring
for firmly fixing.



Frameless design,
more elegant.



B29770 - ROUND

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
6W	120/230V	480Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	90x19mm	75mm	25,000H
10W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	120x19mm	115mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	170x19mm	155mm	25,000H
22W	120/230V	1760Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	225x19mm	210mm	25,000H



Die-Casting aluminum
for better heatsink.



Strong snap spring
for firmly fixing.



Frameless design,
more elegant.



B29775 - SQUARE

											
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	DxH	CUTOUT	LIFE
6W	120/230V	480Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	90x19mm	75x75mm	25,000H
10W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	120x19mm	105x105mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	170x19mm	155x155mm	25,000H
22W	120/230V	1760Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	225x19mm	210x210mm	25,000H

Panel Light

ANTI-GLARE PANEL LIGHT



B29760 - ROUND



	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	ØxH	CUTOUT	LIFE
6W	120/230V	480Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	90x19mm	75mm	25,000H
10W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	120x19mm	115mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	170x19mm	155mm	25,000H
22W	120/230V	1760Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	225x19mm	210mm	25,000H




B29765 - SQUARE




	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	DxH	CUTOUT	LIFE
6W	120/230V	480Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	90x19mm	75x75mm	25,000H
10W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	120x19mm	105x105mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	170x19mm	155x155mm	25,000H
22W	120/230V	1760Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	225x19mm	210x210mm	25,000H





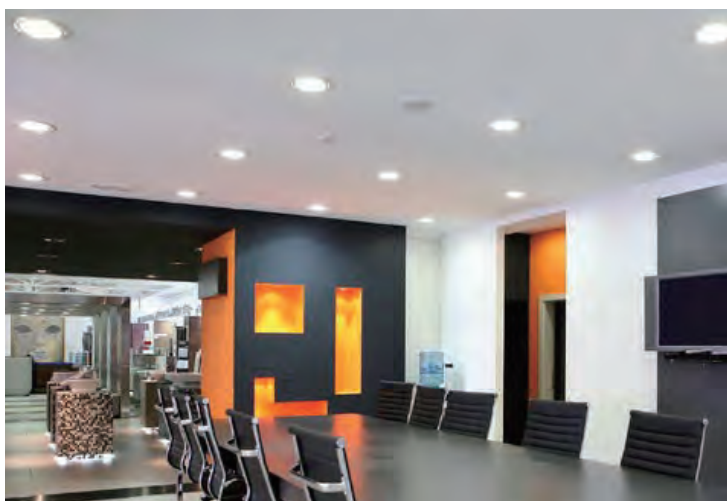


Panel Light

EDGE-LIT PANEL LIGHT










B29705 - RECESSED MOUNT



							
	VOLT	LUMENS	BEAM	CCT	ØxH	CUTOUT	LIFE
3W	120/230V	240Lm	120°	3000/4000/6500K	85x13mm	74mm	25,000H
6W	120/230V	480Lm	120°	3000/4000/6500K	120x13mm	97mm	25,000H
9W	120/230V	720Lm	120°	3000/4000/6500K	150x13mm	108mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	170x13mm	125mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	190x13mm	156mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	225x13mm	180mm	25,000H
24W	120/230V	1920Lm	120°	3000/4000/6500K	300x13mm	278mm	25,000H

B29720 - SURFACE MOUNT



						
	VOLT	LUMENS	BEAM	CCT	ØxH	LIFE
6W	120/230V	480Lm	120°	3000/4000/6500K	120x35mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	170x35mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	225x35mm	25,000H
24W	120/230V	1920Lm	120°	3000/4000/6500K	300x35mm	25,000H

Panel Light

EDGE-LIT PANEL LIGHT



With various construction sizes, ROOMLUX LED panel lights are a flexible and efficient alternative to downlights fitted with compact fluorescent lamps. Suitable for diversity of applications and emit pleasant basic lighting in general building areas, shops and corridors.

Die-cast Aluminum,
Good Heat Sink.



Special Design to
Avoid Light Leakage.



0.4mm Flexible PCB,
Better Luminosity.



B29715 - RECESSED MOUNT



VOLT



LUMENS



BEAM



CCT



WxLxH



CUTOUT



LIFE

	VOLT	LUMENS	BEAM	CCT	WxLxH	CUTOUT	LIFE
3W	120/230V	240Lm	120°	3000/4000/6500K	70x70x13mm	72x72mm	25,000H
6W	120/230V	480Lm	120°	3000/4000/6500K	120x120x13mm	90x90mm	25,000H
9W	120/230V	720Lm	120°	3000/4000/6500K	150x150x13mm	103x103mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	170x170x13mm	123x123mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	190x190x13mm	153x153mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	225x225x13mm	176x176mm	25,000H
24W	120/230V	1920Lm	120°	3000/4000/6500K	300x300x13mm	204x204mm	25,000H

B29725 - SURFACE MOUNT



VOLT



LUMENS



BEAM



CCT



WxLxH




LIFE

	VOLT	LUMENS	BEAM	CCT	WxLxH	LIFE
6W	120/230V	480Lm	120°	3000/4000/6500K	120x35mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	170x35mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	225x35mm	25,000H
24W	120/230V	1920Lm	120°	3000/4000/6500K	300x35mm	25,000H

Panel Light

EDGE-LIT PANEL LIGHT



Flat Frame











Four Line Frame
With Stage





B29710 - 300x300mm/295x295mm/400x400mm/420x420mm



										
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	LxWxH	LIFE
20W	120/230V	1400Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	300x300x10mm	25,000H
36W	120/230V	2880Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	400x400x10mm	25,000H

Recessed Installation:

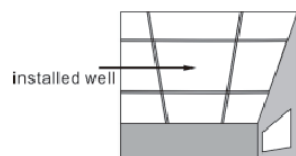











Suspended Installation:



Accessories:




B29712 - 600x600mm/595x595mm/620x620mm


										
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	LxWxH	LIFE
36W	120/230V	2880Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	600x600x10mm	25,000H
40W	120/230V	3200Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	600x600x10mm	25,000H
48W	120/230V	3840Lm	120°	3000/4000/6500K	>80	A+	White/Silver	IP20	600x600x10mm	25,000H

Panel Light


EDGE-LIT PANEL LIGHT

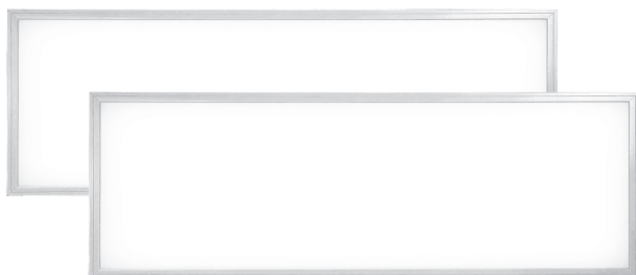

- Both Silver and White frame are available.
- UGR <22 or UGR <19 at option.
- High quality PMMA LGP, no yellowing problem.
- Lifud or other branded driver are available.



Flat Frame



Four Line Frame
With Stage












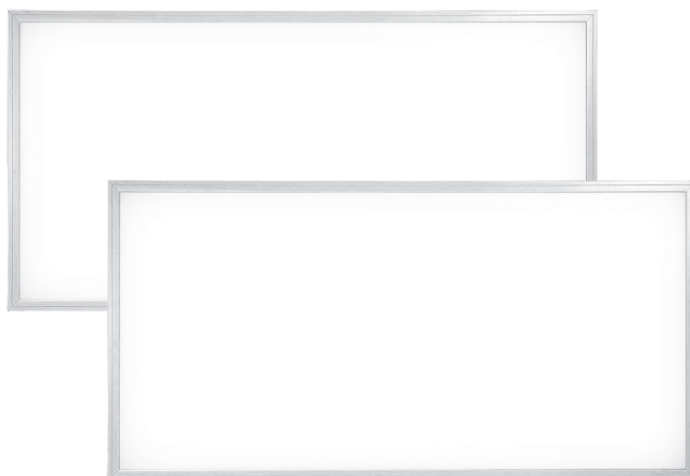
IP20



NON-DIM

B29750 - 300x1200mm/295x1295mm

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
36W	120/230V	2880Lm	120°	3000/4000/6500K	>80	A+	White/Silver	300x1200x10mm	25,000H
48W	120/230V	3800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	300x1200x10mm	25,000H












IP20




NON-DIM

B29752 - 600x1200mm/595x1295mm

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
48W	120/230V	3800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	600x1200x10mm	25,000H
60W	120/230V	4800Lm	120°	3000/4000/6500K	>80	A+	White/Silver	600x1200x10mm	25,000H

Panel Light

BACK-LIT PANEL LIGHT

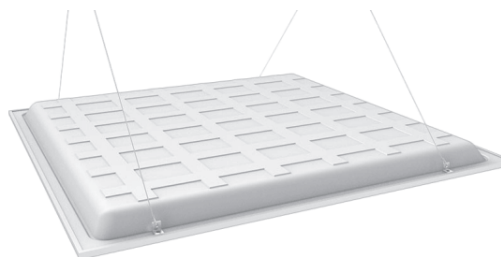


- 80-140Lm/W.
- UGR <22 or UGR <19 at option.
- Without LGP, no yellowing problem.
- Lifud or other branded driver are available.
- 2mm thickness iron plate, ensure whole lamp stronger.



High Lumen SMD With Lens



Fixed Cable, More Stable



30mm Height Design, Light More Uniform



High Quality Isolated Driver



IP20



NON-DIM



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



WxLxH



LIFE

B29754

20W	120/230V	2000Lm	120°	3000/4000/6500K	>80	A+	White	300x300x30/295x295x30mm	25,000H
36W	120/230V	3600Lm	120°	3000/4000/6500K	>80	A+	White	400x400x30/420x420x30mm	25,000H

B29756

24W	120/230V	2400Lm	120°	3000/4000/6500K	>80	A+	White	300x600x30/295x595x30mm	25,000H
30W	120/230V	3000Lm	120°	3000/4000/6500K	>80	A+	White	300x600x30/295x595x30mm	25,000H

B29760

40W	120/230V	4000Lm	120°	3000/4000/6500K	>80	A+	White	300x1200x30/295x1195x30mm	25,000H
48W	120/230V	4980Lm	120°	3000/4000/6500K	>80	A+	White	300x1200x30/295x1195x30mm	25,000H

B29762

40W	120/230V	4000Lm	120°	3000/4000/6500K	>80	A+	White	600x600x30/595x595x30/620x620x30mm	25,000H
48W	120/230V	4800Lm	120°	3000/4000/6500K	>80	A+	White	600x600x30/595x595x30/620x620x30mm	25,000H

CEILING LIGHT



SMART-STANDARD-REMOTE CONTROL

ROOMLUX's innovative Panels are equipped with adjustable or fixed clips for a flexible cutting size of up to 278 mm. Built with the most stable drivers in the market, have low maintenance panels without the flashes and the flickers. These slim & modern panels lights up all the way to the edges, giving a contemporary lighting effect that is ideal for residential, office, or commercial indoor lighting.



Ceiling Light

SMART - WIFI CEILING LIGHT



Warm and cold
light adjustment



16 million
colors choose



Time
on/off



Smart
control



Voice
control



Color scene
selection












Available for
indoors and outdoors



A flexible addition to any lighting setup that melds lighting into creative shapes and forms almost any surface. The Wi-fi strip 3-in-1 kit we offer comes with a power adapter, a Wi-fi strip controller and a led strip.

B27357 - WIFI 9 FUNCTIONS












									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
12W	120/230V	960Lm	120°	RGB+CCT/CCT	>80	A+	Round/Starry	255x55mm	25,000H
18W	120/230V	1440Lm	120°	RGB+CCT/CCT	>80	A+	Round/Starry	310x55mm	25,000H
24W	120/230V	1920Lm	120°	RGB+CCT/CCT	>80	A+	Round/Starry	350x55mm	25,000H

Ceiling Light SMART - WIFI CEILING LIGHT



B27355 - WIFI 9 FUNCTIONS

IP20 NON-DIM

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
12W	120/230V	960Lm	120°	RGB+CCT/CCT	>80	A+	Round/Starry	255x55mm	25,000H
18W	120/230V	1440Lm	120°	RGB+CCT/CCT	>80	A+	Round/Starry	310x55mm	25,000H
24W	120/230V	1920Lm	120°	RGB+CCT/CCT	>80	A+	Round/Starry	350x55mm	25,000H
36W	120/230V	2880Lm	120°	2700-6500K	>80	A+	Round/Starry	565x65mm	25,000H
40W	120/230V	3200Lm	120°	2700-6500K	>80	A+	Round/Starry	615x75mm	25,000H
60W	120/230V	4800Lm	120°	2700-6500K	>80	A+	Round/Starry	670x75mm	25,000H
72W	120/230V	5800Lm	120°	2700-6500K	>80	A+	Round/Starry	830x85mm	25,000H
80W	120/230V	6000Lm	120°	2700-6500K	>80	A+	Round/Starry	1080x125mm	25,000H

Ceiling Light CEILING LIGHT



1

- SMD2835 High-end LED Chips
- Surface Mounting Installation
- Plastic +Metal
- Customized Cover Photo

Different Models for Option



Diamond



Starry



Wave



2



IP20



NON-DIM



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



Ø




LIFE

1 B27350 - ROUND

18W	120/230V	1140Lm	120°	3000/4000/6500K	>80	A+	White	260mm	25,000H
24W	120/230V	1450Lm	120°	3000/4000/6500K	>80	A+	White	330mm	25,000H
32W	120/230V	2050Lm	120°	3000/4000/6500K	>80	A+	White	380mm	25,000H

2 B27352 - SQUARE

18W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White	260x260mm	25,000H
24W	120/230V	1600Lm	120°	3000/4000/6500K	>80	A+	White	330x330mm	25,000H
32W	120/230V	2400Lm	120°	3000/4000/6500K	>80	A+	White	380x380mm	25,000H



B27351 - 3-IN-1 CCT CHANGE



IP20



A+



Ra>80



NON-DIM



VOLT



LUMENS



BEAM



CCT



FINISH



ØxH



LIFE


45W	120/230V	1300/1200/2500Lm	120°	3000/4000/6500K	White	260x50mm	25,000H
-----	----------	------------------	------	-----------------	-------	----------	---------

Ceiling Light

CEILING LIGHT WITH REMOTE CONTROL



- Changing CCT from 3000K-6500K
- Dimming from 10%-100% brightness
- Also can be CCT changed by switch
- Night light

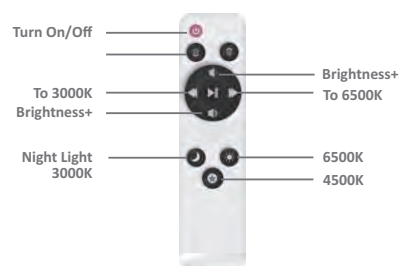

B27353 - STARRY



IP20



DIM



NON-DIM



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



ØxH



LIFE

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
24W	120/230V	1800Lm	120°	3000-6500K	>80	A+	Round/Diamond	285x70mm	25,000H
36W	120/230V	2700Lm	120°	3000-6500K	>80	A+	Round/Diamond	330x70mm	25,000H
48W	120/230V	3600Lm	120°	3000-6500K	>80	A+	Round/Diamond	380x70mm	25,000H
72W	120/230V	5400Lm	120°	3000-6500K	>80	A+	Round/Diamond	500x75mm	25,000H
96W	120/230V	6500Lm	120°	3000-6500K	>80	A+	Round/Diamond	600x75mm	25,000H
120W	120/230V	9600Lm	120°	3000-6500K	>80	A+	Round/Diamond	780x110mm	25,000H
140W	120/230V	11200Lm	120°	3000-6500K	>80	A+	Round/Diamond	970x110mm	25,000H

PENDANT LIGHT



PENDANT LIGHT

ROOMLUX® LED Pendant Lights are an energy efficient, low maintenance alternative to traditional fluorescent in a variety of industrial, commercial, and light assembly applications. It is the optimal solution for modern lighting systems and excellent for new installations due to its low installation cost.



Pendant Light

COLORFUL PENDANT LIGHT



+ 4 LEAF COVER








+ CONNECTED RING



B30320 - Alu.



	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 ØxL	 LIFE
12W	120/230V	960Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x200mm	25,000H
15W	120/230V	1200Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x300mm	25,000H
18W	120/230V	1440Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x400mm	25,000H

Pendant Light

COLORFUL PENDANT LIGHT



B30322 - Alu.



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



ØxL



LIFE

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxL	LIFE
12W	120/230V	960Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x300mm	25,000H
15W	120/230V	1200Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x400mm	25,000H
18W	120/230V	1440Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x500mm	25,000H



With various construction sizes and colors, ROOMLUX LED pendant lights are flexible and efficient alternative to decorative lights. Suitable for diversity of applications and emit pleasant basic lighting in general building areas, home, restaurants and bars etc.

B30323 - Alu.



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH




ØxL



LIFE

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxL	LIFE
12W	120/230V	960Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x250mm	25,000H
15W	120/230V	1200Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x350mm	25,000H
18W	120/230V	1440Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x450mm	25,000H

TRACK LIGHT



TRACK LIGHT

ROOMLUX® Track Lighting effect can achieve point, line, surface combination, not only to meet the needs of various lighting effects, but also convenient installation, fashionable style, can greatly enhance the decorative effect, in line with the modern architectural design concept, is a fashionable, high-end LED lights leading the trend in the future, is the ideal choice of office, exhibition hall, exclusive stores, hotels, villas and clubs.



Track Light

COLORFUL TRACK LIGHT



B30330 - Alu.



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



ØxL



LIFE

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxL	LIFE
12W	120/230V	960Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x200mm	25,000H
15W	120/230V	1200Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x300mm	25,000H
18W	120/230V	1440Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x400mm	25,000H



B30332 - Alu.



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



ØxL



LIFE

	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxL	LIFE
12W	120/230V	960Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x300mm	25,000H
15W	120/230V	1200Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x400mm	25,000H
18W	120/230V	1440Lm	24°	3000/4000/6500K	>80	A+	White/Black/Blue/Green/Pink	60x500mm	25,000H





Track Light

MULTIFUNCTIONAL TRACK LIGHT

Twist & Zoom
15° - 60°

 **Bluetooth™** (Optional)

4 in 1 Multifunctional Tracklight

-  2700K-6500K CCT adjustable
-  3%-100% dimming
-  Wireless control
-  15°-60° Beam adjustable

B30700 - Alu.












IP20



DIM



NON-DIM

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 ØxL	 LIFE
15W	120/230V	1200Lm	15°-60°	3000-6500K	>80	A+	White/Black	59x155mm	25,000H
25W	120/230V	2000Lm	15°-60°	3000-6500K	>80	A+	White/Black	85x155mm	25,000H
35W	120/230V	2800Lm	15°-60°	3000-6500K	>80	A+	White/Black	91x155mm	25,000H

Track Light

BASIC TRACK LIGHT



B30710 - Alu.



A+



Ra>80



IP20



NON-DIM



VOLT



LUMENS



BEAM



CCT



FINISH



ØxLxH



LIFE

	VOLT	LUMENS	BEAM	CCT	FINISH	ØxLxH	LIFE
30W	120/230V	2800Lm	24°	3000/4000/6500K	White/Black	65x156x209mm	25,000H



B30342 - Alu.



A+



Ra>80



IP20



NON-DIM



VOLT



LUMENS



BEAM



CCT



FINISH



ØxLxH



LIFE

	VOLT	LUMENS	BEAM	CCT	FINISH	ØxLxH	LIFE
7W	120/230V	560Lm	12°/24°	3000/4000/6500K	White/Black	75x115x185mm	25,000H
12W	120/230V	960Lm	12°/24°	3000/4000/6500K	White/Black	75x115x185mm	25,000H
15W	120/230V	1440Lm	12°/24°	3000/4000/6500K	White/Black	75x115x185mm	25,000H



B30340 - PC



A+



Ra>80



IP20



NON-DIM



VOLT



LUMENS



BEAM



CCT



FINISH



ØxLxH



LIFE


	VOLT	LUMENS	BEAM	CCT	FINISH	ØxLxH	LIFE
5W	120/230V	350Lm	24°	3000/4000/6500K	White/Black	59x120x105mm	25,000H
7W	120/230V	490Lm	24°	3000/4000/6500K	White/Black	59x120x105mm	25,000H

TRI-PROOF LIGHT





STANDARD·HIGHT EFFICIENCY·
5-Y WARRANTY·EMERGENCY

ROOMLUX® extensive range of Tri-proof and Batten Lights of premium quality LED, a staggering lifespan of up to 30,000 hours, unbreakable body built with the most durable materials in the market, and a wide range of lengths and sizes for different application. With multiple function like emergency and sensor, more energy saving.

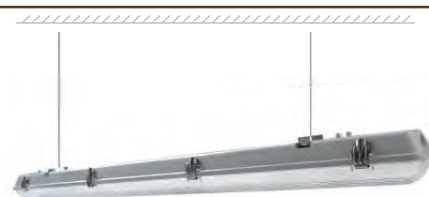


Tri-Proof Light

STANDARD TRI-PROOF LIGHT

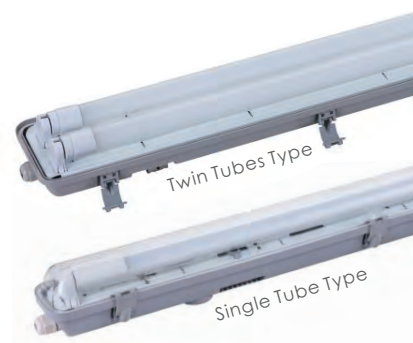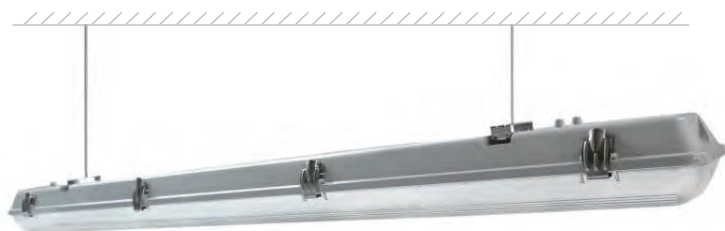

B44305 - STANDARD unequipped

	IK	IP GRADE	MATERIAL	LxWxH
1x0.6M	08	IP65	ABS+PS/ABS+PC/PC+PC	660x70x75mm
2x0.6M	08	IP65	ABS+PS/ABS+PC/PC+PC	665x110x72mm
1x1.2M	08	IP65	ABS+PS/ABS+PC/PC+PC	1270x70x75mm
2x1.2M	08	IP65	ABS+PS/ABS+PC/PC+PC	1270x110x72mm
1x1.5M	08	IP65	ABS+PS/ABS+PC/PC+PC	1560x70x75mm
2x1.5M	08	IP65	ABS+PS/ABS+PC/PC+PC	1560x110x72mm

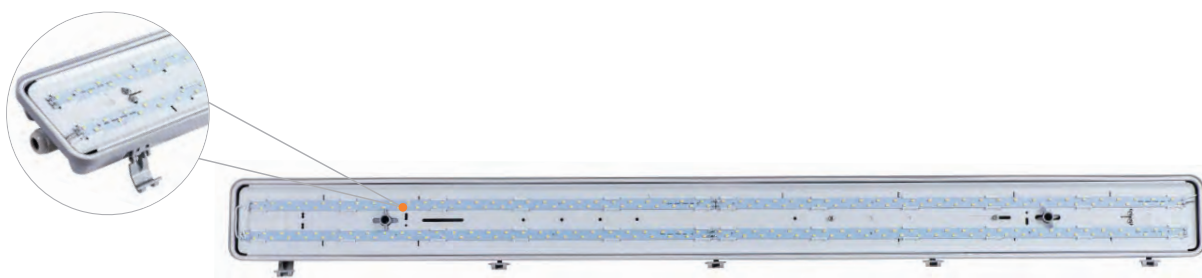

B44310 - STANDARD LED light equipped



	VOLT	LUMENS	BEAM	CCT	MATERIAL	FINISH	LxWxH	LIFE
0.6M-12W	120/230V	960Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	660x70x75mm	25,000H
0.6M-18W	120/230V	1440Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	665x110x72mm	25,000H
0.6M-28W	120/230V	2240Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	665x110x72mm	25,000H
1.2M-24W	120/230V	1920Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1270x70x75mm	25,000H
1.2M-36W	120/230V	2880Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1270x110x72mm	25,000H
1.2M-54W	120/230V	4320Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1270x110x72mm	25,000H
1.5M-36W	120/230V	2880Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1565x70x75mm	25,000H
1.5M-54W	120/230V	4320Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1565x110x72mm	25,000H
1.5M-70W	120/230V	5600Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1565x110x72mm	25,000H

Tri-Proof Light


HIGH EFFICIENCY TRI-PROOF LIGHT




PC Extrusion Body With Alu. Heat Sink Inside
up to **140Lm/W**, standard is 100Lm/W



Waterproof Connector

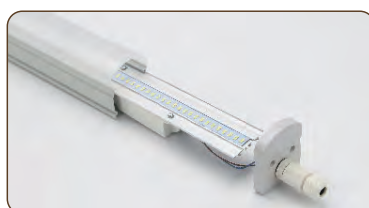

100-140Lm/W LED Chips

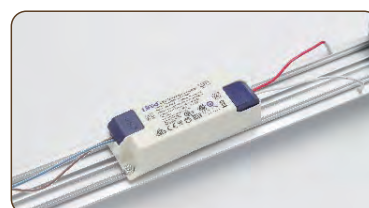

Lifud Driver



B44350 - LED light equipped




	VOLT	LUMENS	BEAM	CCT	MATERIAL	LxWxH	LIFE
0.6M-20W	120/230V	2200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	600x68x63mm	25,000H
1.2M-36W	120/230V	3960Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200x68x63mm	25,000H
1.5M-50W	120/230V	5500Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1500x68x63mm	25,000H

Tri-Proof Light

5-Y WARRANTY TRI-PROOF LIGHT

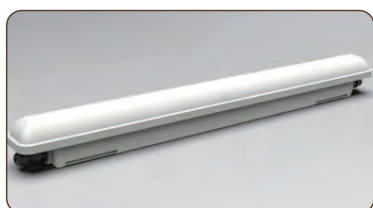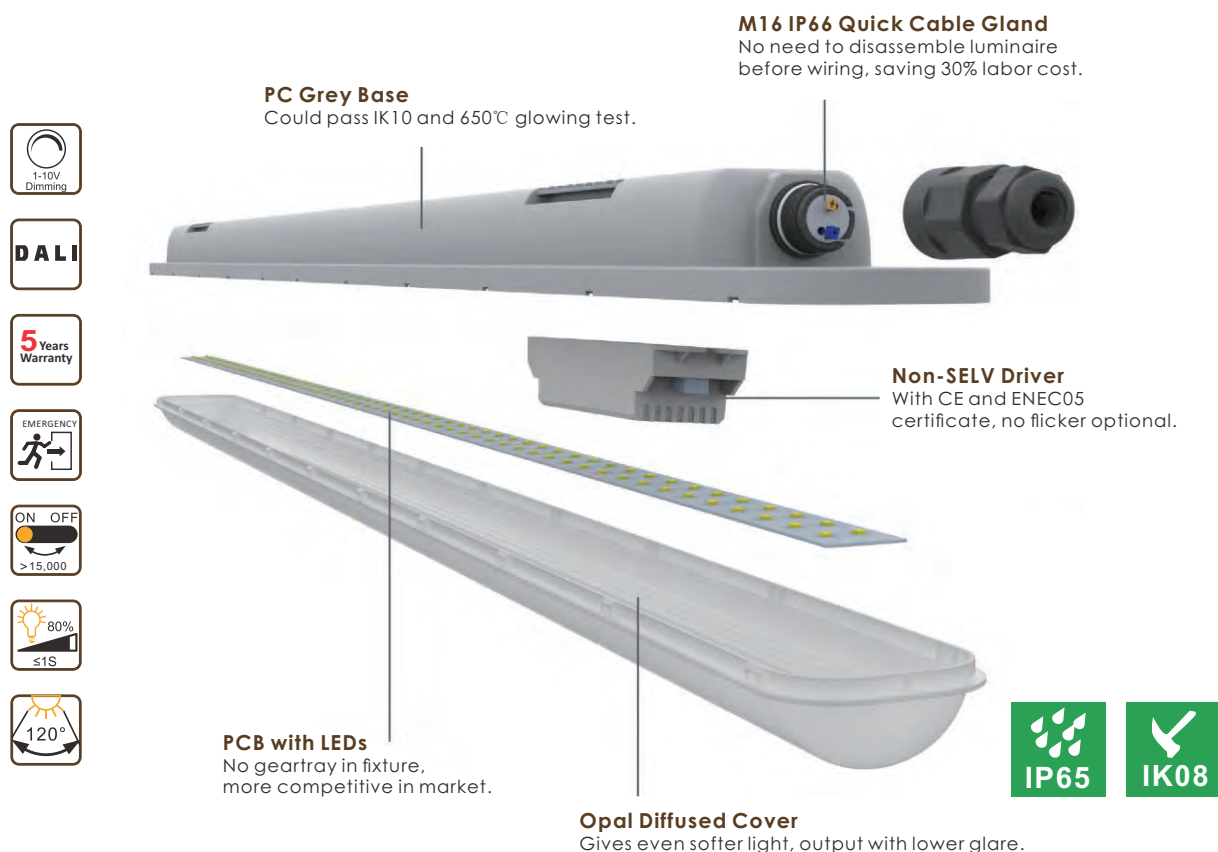

Front View

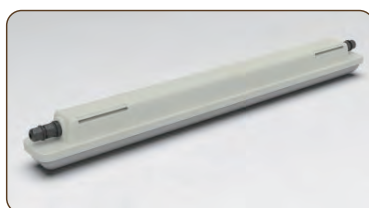








Bottom View



Side View

B44355 - LED light equipped



	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
0.6M-20W	120/230V	2200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	600x68x63mm	25,000H
1.2M-36W	120/230V	3960Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200x68x63mm	25,000H
1.5M-50W	120/230V	5500Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1500x68x63mm	25,000H



Tri-Proof Light

EMERGENCY TRI-PROOF LIGHT

Standard Version

Emergency Version

Microwave Sensor Version

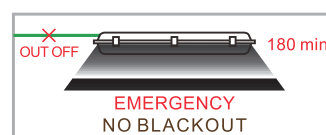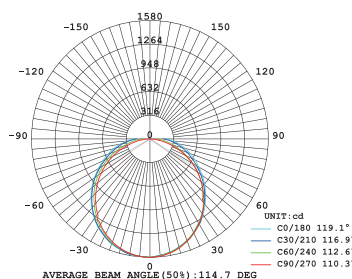

Emergency Power: 3W- 4W
Battery: Ni-Cd/Ni-Mh
Recharge time: 24 hours
Use time: 1.5 hours/3 hours



Internal chip




Junction box



Emergency Version










Microwave Sensor Version



B44340 - EMERGENCY WITH MICROWAVE LED light equipped




	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
0.6M-10W	120/230V	1000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	655x90x88mm	25,000H
0.6M-20W	120/230V	2000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	655x130x88mm	25,000H
1.2M-20W	120/230V	2000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1265x90x88mm	25,000H
1.2M-40W	120/230V	4000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1265x130x88mm	25,000H
1.5M-30W	120/230V	3000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1565x90x88mm	25,000H
1.5M-60W	120/230V	6000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1565x130x88mm	25,000H

TRI-PROOF LIGHT





STANDARD·HIGHT EFFICIENCY·
5-Y WARRANTY·EMERGENCY

ROOMLUX® extensive range of Tri-proof and Batten Lights of premium quality LED, a staggering lifespan of up to 30,000 hours, unbreakable body built with the most durable materials in the market, and a wide range of lengths and sizes for different application. With multiple function like emergency and sensor, more energy saving.

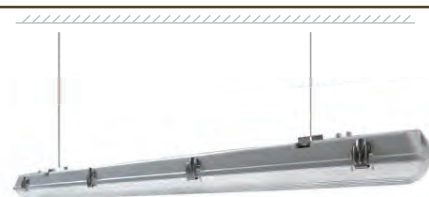

Tri-Proof Light

STANDARD TRI-PROOF LIGHT

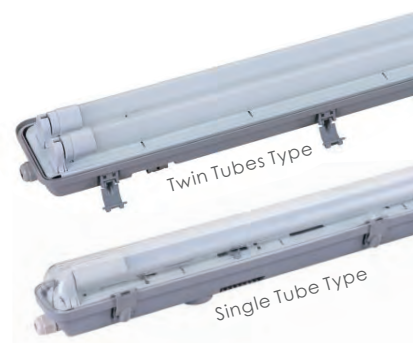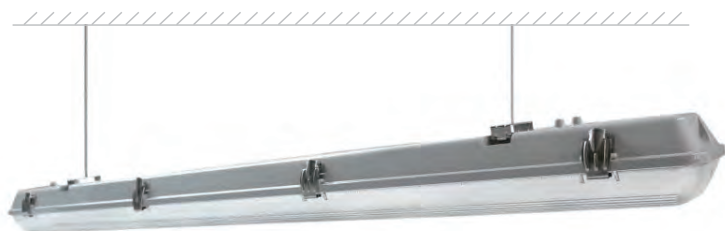

B44305 - STANDARD unequipped

	IK	IP GRADE	MATERIAL	LxWxH
1x0.6M	08	IP65	ABS+PS/ABS+PC/PC+PC	660x70x75mm
2x0.6M	08	IP65	ABS+PS/ABS+PC/PC+PC	665x110x72mm
1x1.2M	08	IP65	ABS+PS/ABS+PC/PC+PC	1270x70x75mm
2x1.2M	08	IP65	ABS+PS/ABS+PC/PC+PC	1270x110x72mm
1x1.5M	08	IP65	ABS+PS/ABS+PC/PC+PC	1560x70x75mm
2x1.5M	08	IP65	ABS+PS/ABS+PC/PC+PC	1560x110x72mm



B44310 - STANDARD LED light equipped



	VOLT	LUMENS	BEAM	CCT	MATERIAL	FINISH	LxWxH	LIFE
0.6M-12W	120/230V	960Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	660x70x75mm	25,000H
0.6M-18W	120/230V	1440Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	665x110x72mm	25,000H
0.6M-28W	120/230V	2240Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	665x110x72mm	25,000H
1.2M-24W	120/230V	1920Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1270x70x75mm	25,000H
1.2M-36W	120/230V	2880Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1270x110x72mm	25,000H
1.2M-54W	120/230V	4320Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1270x110x72mm	25,000H
1.5M-36W	120/230V	2880Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1565x70x75mm	25,000H
1.5M-54W	120/230V	4320Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1565x110x72mm	25,000H
1.5M-70W	120/230V	5600Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	Clear/Milky	1565x110x72mm	25,000H

Tri-Proof Light


HIGH EFFICIENCY TRI-PROOF LIGHT




PC Extrusion Body With Alu. Heat Sink Inside
up to **140Lm/W**, standard is 100Lm/W



Waterproof Connector

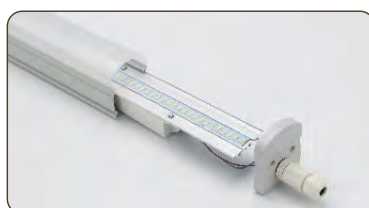

100-140Lm/W LED Chips

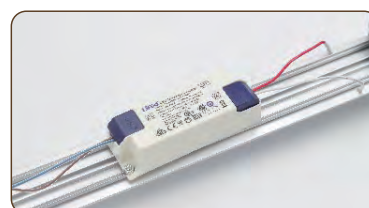

Lifud Driver

B44350 - LED light equipped



VOLT



LUMENS



BEAM



CCT



MATERIAL



LxWxH





LIFE


	VOLT	LUMENS	BEAM	CCT	MATERIAL	LxWxH	LIFE
0.6M-20W	120/230V	2200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	600x68x63mm	25,000H
1.2M-36W	120/230V	3960Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200x68x63mm	25,000H
1.5M-50W	120/230V	5500Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1500x68x63mm	25,000H

Tri-Proof Light

5-Y WARRANTY TRI-PROOF LIGHT

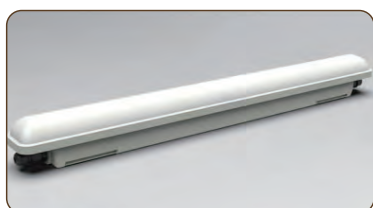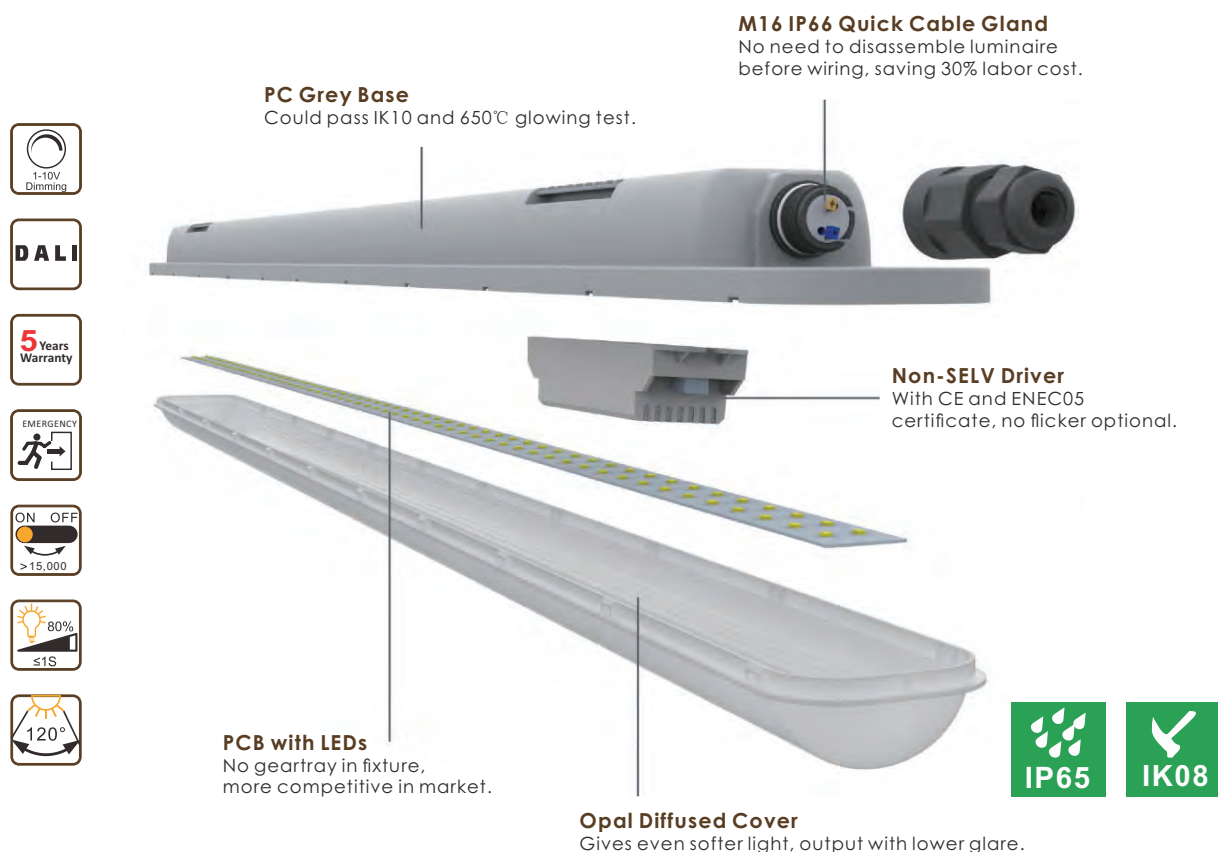

Front View

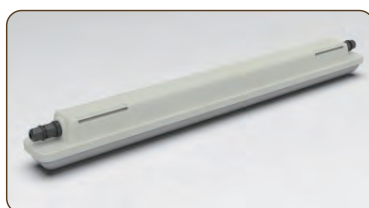








Bottom View



Side View

B44355 - LED light equipped



	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
0.6M-20W	120/230V	2200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	600x68x63mm	25,000H
1.2M-36W	120/230V	3960Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200x68x63mm	25,000H
1.5M-50W	120/230V	5500Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1500x68x63mm	25,000H



Tri-Proof Light

EMERGENCY TRI-PROOF LIGHT

Standard Version

Emergency Version

Microwave Sensor Version

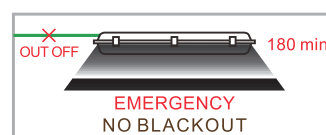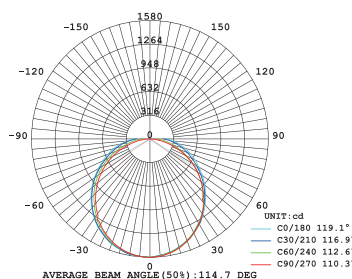

Emergency Power: 3W- 4W
Battery: Ni-Cd/Ni-Mh
Recharge time: 24 hours
Use time: 1.5hours/3hours



Internal chip




Junction box



Emergency Version










Microwave Sensor Version



B44340 - EMERGENCY WITH MICROWAVE LED light equipped



	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
0.6M-10W	120/230V	1000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	655x90x88mm	25,000H
0.6M-20W	120/230V	2000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	655x130x88mm	25,000H
1.2M-20W	120/230V	2000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1265x90x88mm	25,000H
1.2M-40W	120/230V	4000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1265x130x88mm	25,000H
1.5M-30W	120/230V	3000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1565x90x88mm	25,000H
1.5M-60W	120/230V	6000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1565x130x88mm	25,000H

BATTEN & LINEAR LIGHT



BATTEN LIGHT

ROOMLUX® Batten and Grill fitting Light with the wattage from 10w to 60w, equipped with quick connectors to lessen set-up time during installation. Available in 3000K, 4000K, and 6400K color temperatures, these durable fittings are ideal for any indoor lighting use. With 140 lumens per watt rating from the super bright series offer superior efficiency and great energy savings. Comes with a fast connector for easy wiring and installation.



Batten & Linear Light

BATTEN LIGHT - IP20



Cover Openable



Cover Openable,
Convenient Wiring










Side View



Metal Base

B28310 - LED light equipped



	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
0.6M-10W	120/230V	1300Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	570x62x70mm	25,000H
0.6M-20W	120/230V	2600Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	570x62x70mm	25,000H
1.2M-24W	120/230V	3120Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1170x62x70mm	25,000H
1.2M-40W	120/230V	5200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1170x62x70mm	25,000H
1.5M-30W	120/230V	3900Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1470x62x70mm	25,000H
1.5M-60W	120/230V	7800Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1470x62x70mm	25,000H
1.5M-70W	120/230V	9100Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1470x62x70mm	25,000H
1.8M-50W	120/230V	6500Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1770x62x70mm	25,000H
1.8M-70W	120/230V	9750Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1770x62x70mm	25,000H

Batten & Linear Light

BATTEN LIGHT - IP20

New










Cover Openable



Function: on-off microwave sensor/dimmable sensor/1-10V dimmable/ DALI /emergency/through wiring
Installation: Surface mounting/suspending

B28315 - LED light equipped



	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
0.6M-20W	120/230V	2400Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	575x85x75mm	25,000H
1.2M-40W	120/230V	4800Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1175x85x75mm	25,000H
1.5M-60W	120/230V	7200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1475x85x75mm	25,000H

Batten & Linear Light

BATTEN LIGHT - IP20

PCB with LEDs

No geartray in fixture, more competitive in market.

Push Wire

Connector
Built-in dedicated bolder for clipping in the microwave sensor.

Metal base

Could pass IK08 and IP20.

Opal Diffused Cover

Gives even softer light, output with lower glare.

Plug-in Emergency Module (Self-test option)


Plug & Play Emergency Module, with self-test version.








Colour temperature Switching

Dip switch is located at the back of gear tray for easy operation, choosing between 4000K/ 5000 K/ 6000K.





B28320 - LED light equipped




	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
1.2M-20W	120/230V	2400Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200x144x75mm	25,000H
1.2M-40W	120/230V	4800Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200x144x75mm	25,000H
1.5M-30W	120/230V	3600Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1500x144x75mm	25,000H
1.5M-60W	120/230V	7200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1500x144x75mm	25,000H
1.8M-50W	120/230V	6000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1800x144x75mm	25,000H
1.8M-76W	120/230V	9120Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1800x144x75mm	25,000H

Batten & Linear Light


BATTEN LIGHT - IP20

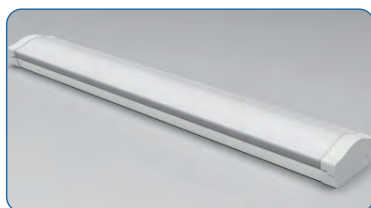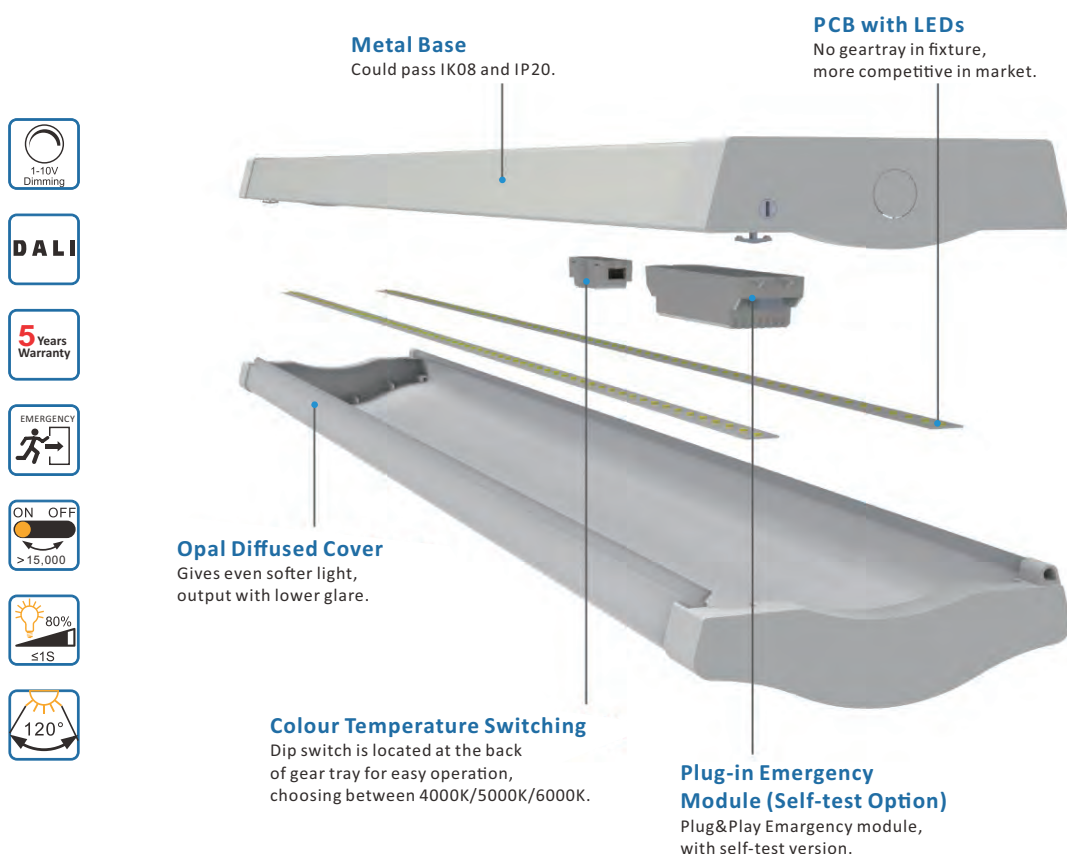

Top view

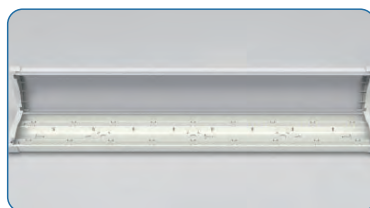



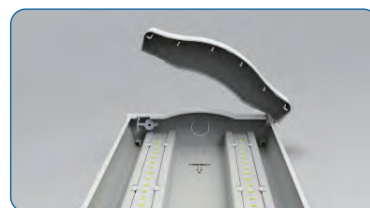




Front View



Side view

B28325 - LED light equipped



	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
1.2M-20W	120/230V	2400Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200x180x85mm	25,000H
1.2/1.5M-40W	120/230V	4800Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1200/1500x180x85mm	25,000H
1.5/1.8M-60W	120/230V	7200Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1500/1800x180x85mm	25,000H
1.8M-70W	120/230V	9000Lm	120°	3000/4000/6500K	ABS+PC/PC+PC	1800x180x85mm	25,000H

Batten & Linear Light


LED BATTEN LIGHT - IP20




- Integral fixed output driver
- Large size with traditional looking
- Designed for surface mount applications of indoor use.



Optional Cap



Milky PC Cover










Easy Installation



Full Aluminum Base


B28300 - Super Slim



	 VOLT	 LUMENS	 BEAM	 CCT	 MATERIAL	 LxWxH	 LIFE
0.3M-9W	120/230V	720Lm	120°	3000/4000/6500K	PC	300x75x24mm	25,000H
0.6M-13W	120/230V	1040Lm	120°	3000/4000/6500K	PC	600x75x24mm	25,000H
0.9M-18W	120/230V	1440Lm	120°	3000/4000/6500K	PC	900x75x24mm	25,000H
1.2M-24W	120/230V	1900Lm	120°	3000/4000/6500K	PC	1200x75x24mm	25,000H

Batten & Linear Light

LED BATTEN LIGHT - IP20

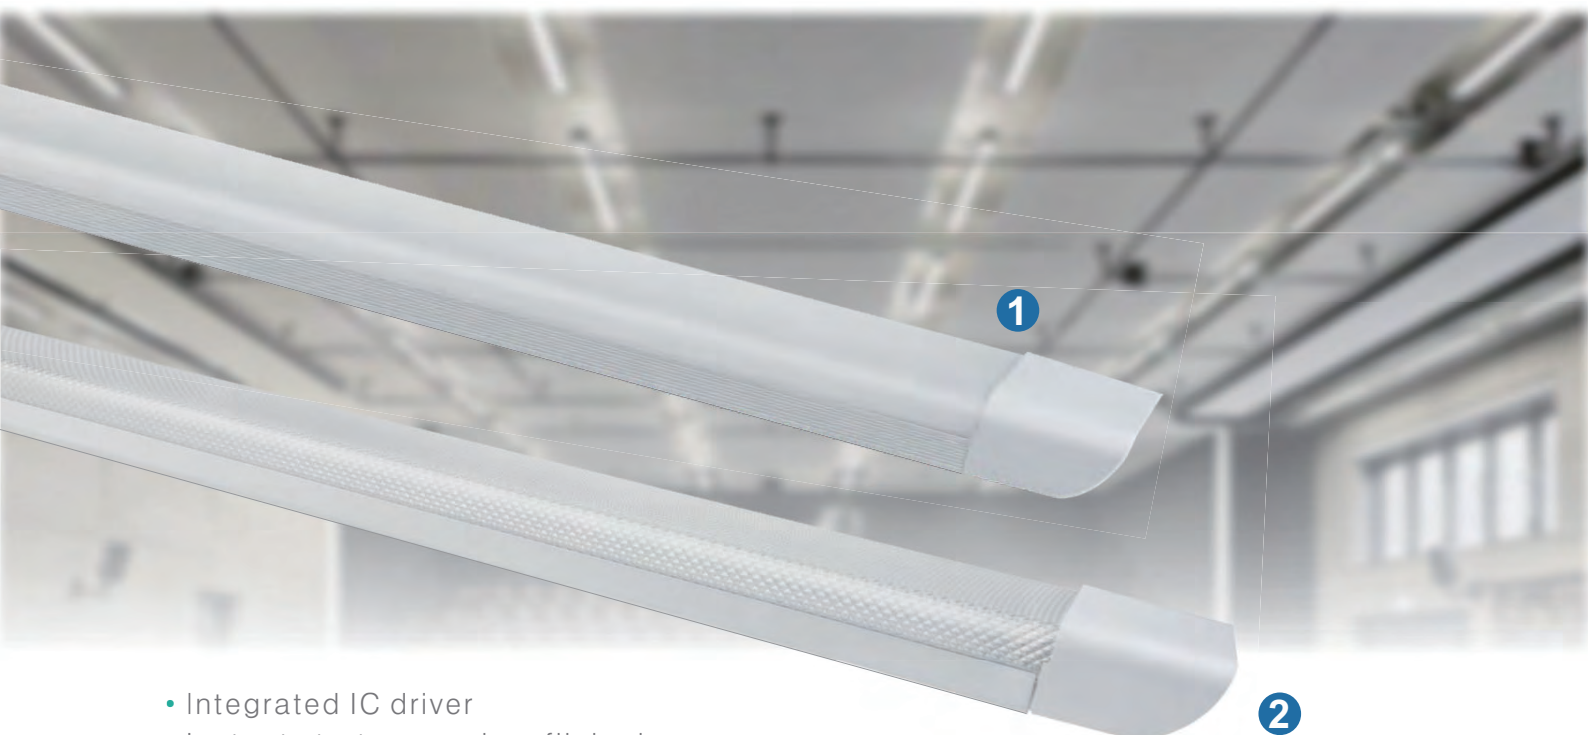

- Integrated IC driver
- Instant start-up and no flickering
- Easy and convenient installation
- Direct AC power – ballast or starter not required



VOLT



LUMENS



BEAM



CCT



MATERIAL



LxWxH



LIFE

① B28305 - Frosted Cover

0.6M-27W	120/230V	2430Lm	120°	3000/4000/6500K	Alu.+PC	600x75x25mm	25,000H
0.6M-36W	120/230V	3240Lm	120°	3000/4000/6500K	Alu.+PC	600x75x25mm	25,000H
1.2M-54W	120/230V	4860Lm	120°	3000/4000/6500K	Alu.+PC	1200x75x25mm	25,000H
1.2M-72W	120/230V	6480Lm	120°	3000/4000/6500K	Alu.+PC	1200x75x25mm	25,000H

② B28310 - Prismatic Cover

0.6M-18W	120/230V	1620Lm	120°	3000/4000/6500K	Iron+PC	600x62x23mm	25,000H
0.6M-24W	120/230V	2160Lm	120°	3000/4000/6500K	Iron+PC	600x62x23mm	25,000H
1.2M-36W	120/230V	3240Lm	120°	3000/4000/6500K	Iron+PC	1200x62x23mm	25,000H
1.2M-48W	120/230V	4320Lm	120°	3000/4000/6500K	Iron+PC	1200x62x23mm	25,000H
0.6M-27W	120/230V	2430Lm	120°	3000/4000/6500K	Iron+PC	600x75x25mm	25,000H
0.6M-36W	120/230V	3240Lm	120°	3000/4000/6500K	Iron+PC	600x75x25mm	25,000H
1.2M-54W	120/230V	4860Lm	120°	3000/4000/6500K	Iron+PC	1200x75x25mm	25,000H
1.2M-72W	120/230V	6480Lm	120°	3000/4000/6500K	Iron+PC	1200x75x25mm	25,000H

EMERGENCY LIGHT



EXITSIGN · EMERGENCY LIGHT

ROOMLUX® new range of LED emergency lights comes at an age of increased awareness and standards for safety compliance in different infrastructures. Now equipped with highly efficient LEDs, these emergency lights include clear-cut exit signs, and are powered by high performance batteries, to provide a longer lifespan, lower maintenance, with increased working time when activated.



Emergency Light EXIT SIGN



1



2

- Housing Color: White/Black
- Lens: Red/Green
- Letter: EXIT/SALIDA
- Single or Double face (Universal)



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE


1 G68300

2W	120/230V	80Lm	1.2V 1000mAh NI-CD	ABS	White/Black	295x190x44mm	50,000H
----	----------	------	--------------------	-----	-------------	--------------	---------

2 G68305

2W	120/230V	80Lm	9.6V 1000mAh NI-CD	ABS	White/Black	409x202x111mm	50,000H
----	----------	------	--------------------	-----	-------------	---------------	---------

Emergency Light EXIT SIGN

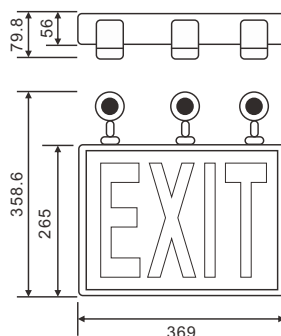

- Housing Color: White/Black
- Heads: Two or three LED heads (optional)
- Battery: High capacity 1800mAh for minimum 90 minutes emergency operation.
- Fire-resisitant ABS body
- Strictly IEC60598-2-22:2014 compliant



Fire Resistant




IP20 Rated



NI-CD Pack
9.6V 1.8Ah

G68310

							
VOLT	LUMENS	BATTERY CAPACITY	MATERIAL	FINISH	LxWxH	LIFE	
2.8W	120/230V	112Lm	9.6V 1800mAH NI-CD	20-Guage Steel	White/Black	369x359x80mm	50,000H

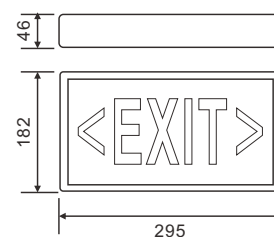

- Housing Color: White/Black
- Lens: Red/Green
- Test switch and charge indicator



Fire Resistant



IP20 Rated



NI-CD Pack
1.2V 0.9Ah

G68315

							
VOLT	LUMENS	BATTERY CAPACITY	MATERIAL	FINISH	LxWxH	LIFE	
1W	120/230V	50l m	1.2V 900mAH NI-CD	ABS	White/Black	295x182x46mm	25,000H

Emergency Light EXIT SIGN



1




2

Optional multi directional legend stickers.



- New Slim type bulkhead emergency light
- Clear polycarbonate diffuser & ABS housing
- 11/21 pcs SMD3528 LED for enhanced lumen output
- 3 hours maintained operation
- Can be converted to Edge-LIT EXIT signs by accessories
- Optional multi directional sticker legend kit
- Complies with IEC60598-2-22, ROHS

Dimension:

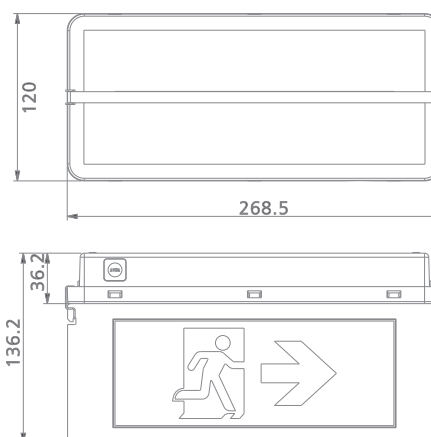

Fire
Resistant



IP65
Rated



NI-MH
PACK



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

1 G68320

	VOLT	LUMENS	BATTERY CAPACITY	MATERIAL	FINISH	LxWxH	LIFE
2W	120/230V	80Lm	3.6V 1000mAH NI-MH	ABS	White	269x120x136mm	50,000H
2.8W	120/230V	160Lm	3.6V 1500mAH NI-MH	ABS	White	269x120x136mm	50,000H

2 G68325

	VOLT	LUMENS	BATTERY CAPACITY	MATERIAL	FINISH	LxWxH	LIFE
2W	120/230V	80Lm	3.6V 1000mAH NI-MH	ABS	White	269x120x120mm	50,000H
2.8W	120/230V	160Lm	3.6V 1500mAH NI-MH	ABS	White	269x120x120mm	50,000H

Emergency Light EXIT SIGN



1



2

- Brand new Plastic housing emergency exit sign
- Includes direction stickers to indicate the correct exit
- Complies with IEX60598-2-22, ROHS



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE


1 G68330

3.6W-Wall Mounted	120/230V	220Lm	3.6V 1000mAH NI-MH	ABS	White	316x196x75mm	50,000H
3.6W-Ceiling Mounted	120/230V	220Lm	3.6V 1000mAH NI-MH	ABS	White	316x696x75mm	50,000H
3.6W-Suspended Mounted	120/230V	220Lm	3.6V 1000mAH NI-MH	ABS	White	316x196x24mm	50,000H


2 G68335

2.6W-Wall Mounted	120/230V	220Lm	3.6V 1000mAH NI-MH	Alu.	White	316x210x47mm	50,000H
2.6W-Ceiling Mounted	120/230V	220Lm	3.6V 1000mAH NI-MH	Alu.	White	316x320x100mm	50,000H
2.6W-Suspended Mounted	120/230V	220Lm	3.6V 1000mAH NI-MH	Alu.	White	316x238x100mm	50,000H


Cord suspended ceiling mounted



Wall mounted



Ceiling mounted



Emergency Light EXIT SIGN



Fire
Resistant



IP20
Rated



NI-CD Pack
2.4V 0.3Ah



NI-CD Pack
3.6V 0.3Ah



NI-MH Pack



G68340



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

2W	120/230V	8.6Lm	4.8V 400mAH NI-MH	Alu.+Plastic	White	308x248x46mm	50,000H
----	----------	-------	-------------------	--------------	-------	--------------	---------



G68345



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

2W	120/230V	8.6Lm	3.6V 500mAH NI-CD	ABS+PMMA	White	370x225x46mm	50,000H
----	----------	-------	-------------------	----------	-------	--------------	---------



G68350



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

2.5W	120/230V	8.3Lm	3.6V 500mAH NI-CD	ABS+PMMA	White	269x350x42mm	50,000H
------	----------	-------	-------------------	----------	-------	--------------	---------



G68355



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

5.5W	120/230V	126Lm	3.6V 1800mAH NI-CD	Steel +PMMA	White	308x248x46mm	50,000H
------	----------	-------	--------------------	-------------	-------	--------------	---------








Emergency Light EMERGENCY LIGHT



Optional multi directional legend stickers.



G68390

	 VOLT	 LUMENS	 BATTERY CAPACITY	 MATERIAL	 FINISH	 LxWxH	 LIFE
2.5W	120/230V	200Lm	7.4V 1000mAH LI-ION	ABS	White	270x100x45mm	50,000H
4W	120/230V	400Lm	7.4V 1500mAH LI-ION	ABS	White	270x100x54mm	50,000H


Optional multi directional legend stickers.



G68395

	 VOLT	 LUMENS	 BATTERY CAPACITY	 MATERIAL	 FINISH	 LxWxH	 LIFE
5.2W	120/230V	130Lm	3.6V 1500mAH NI-CAD	ABS	White	352x110x67mm	50,000H

Emergency Light EMERGENCY LIGHT

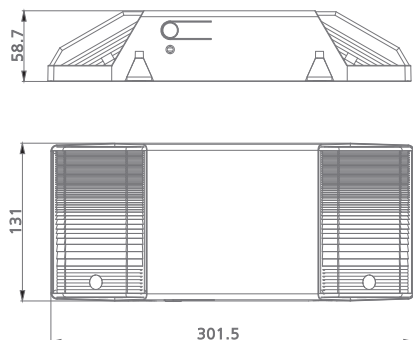

B68310



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

4.8W

120/230V

126Lm


3.6V 1000mAh NI-CD

ABS

White

302x131x59mm

50,000H

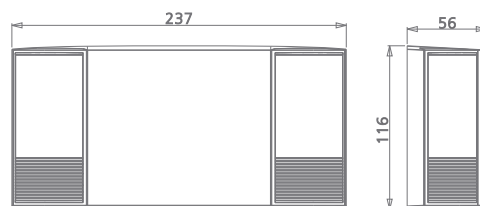

B68315



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

1.8W

120-277V

240Lm

3.6V 1000mAh NI-CD



ABS

White

237x116x56mm

50,000H


Emergency Light EMERGENCY LIGHT

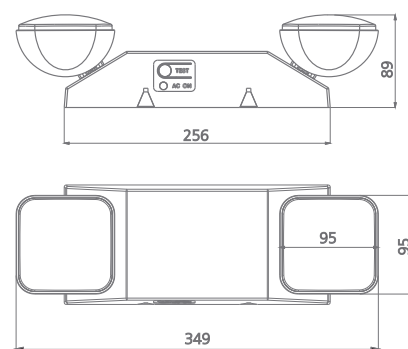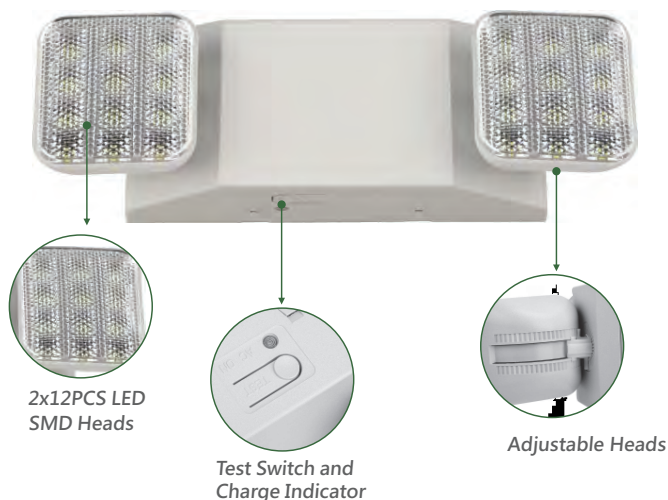

B68300




							
VOLT	LUMENS	BATTERY CAPACITY	MATERIAL	FINISH	LxWxH	LIFE	
4.8W	120/230V	115Lm	3.6V 1000mAh NI-CD	ABS	White	349x95x89mm	50,000H

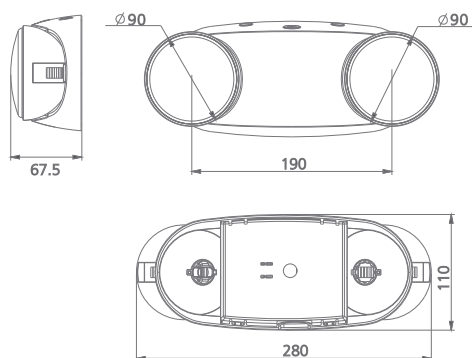


B68305



							
VOLT	LUMENS	BATTERY CAPACITY	MATERIAL	FINISH	LxWxH	LIFE	
2W	120/230V	200Lm	3.6V 1000mAh NI-CD	ABS	White	280x110x68mm	50,000H

Emergency Light EMERGENCY LIGHT

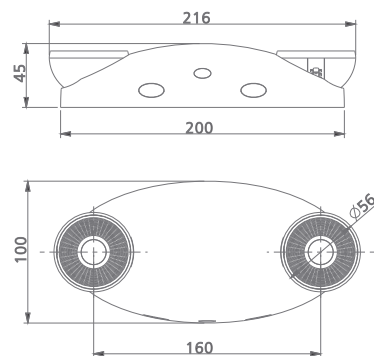

B68320



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

1W

120/230V

200Lm


3.6V 1000mAh NI-CD

ABS

White

216x100x45mm

50,000H

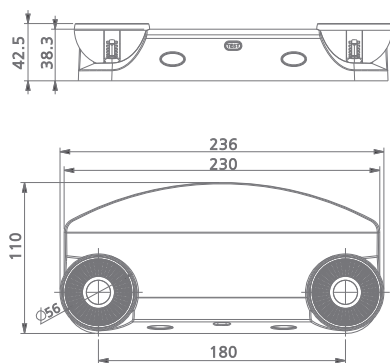

B68325



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

1.1W

120/230V

240Lm

3.6V 1000mAh NI-CD

ABS

White

236x110x43mm

50,000H

Emergency Light EMERGENCY LIGHT



B68330



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LIFE

1.8W

120/230V

90-150Lm

3.6V 1000mAh LI-ION

ABS

White

230x65x45mm

50,000H



- 30/60/90pcs super bright SMD3528
- 3.6V 1000-2000mAh lithium battery
- Discharge time:
3 Hours/strong model
6Hours/weak mode

B68335



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LIFE

2W

120/230V

120Lm

3.6V 2000mAh LI-ION

ABS

White

376x52x36mm

50,000H

Emergency Light EMERGENCY LIGHT



- 30/60/90pcs high brightness SMD3528
- 4V 2000mAh Lithium Battery
- Discharge time: 3-10H
- Portable linear emergency light.



VOLT



LUMENS



BATTERY CAPACITY



MATERIAL



FINISH



LxWxH



LIFE

1 B68340

2W	120/230V	100Lm	4V 2000mAH ACID	ABS	White+Grey	290x68x46mm	50,000H
----	----------	-------	-----------------	-----	------------	-------------	---------

2 B68345

4W	120/230V	200Lm	2x4V 2000mAH ACID	ABS	White+Grey	440x75x45mm	50,000H
----	----------	-------	-------------------	-----	------------	-------------	---------

3 B68350

6W	120/230V	300Lm	2x4V 2000mAH ACID	ABS	White+Grey	480x75x48mm	50,000H
----	----------	-------	-------------------	-----	------------	-------------	---------



www.roomlux.com