


LED

LUMINAIRES

OUTDOOR + INDUSTRIAL

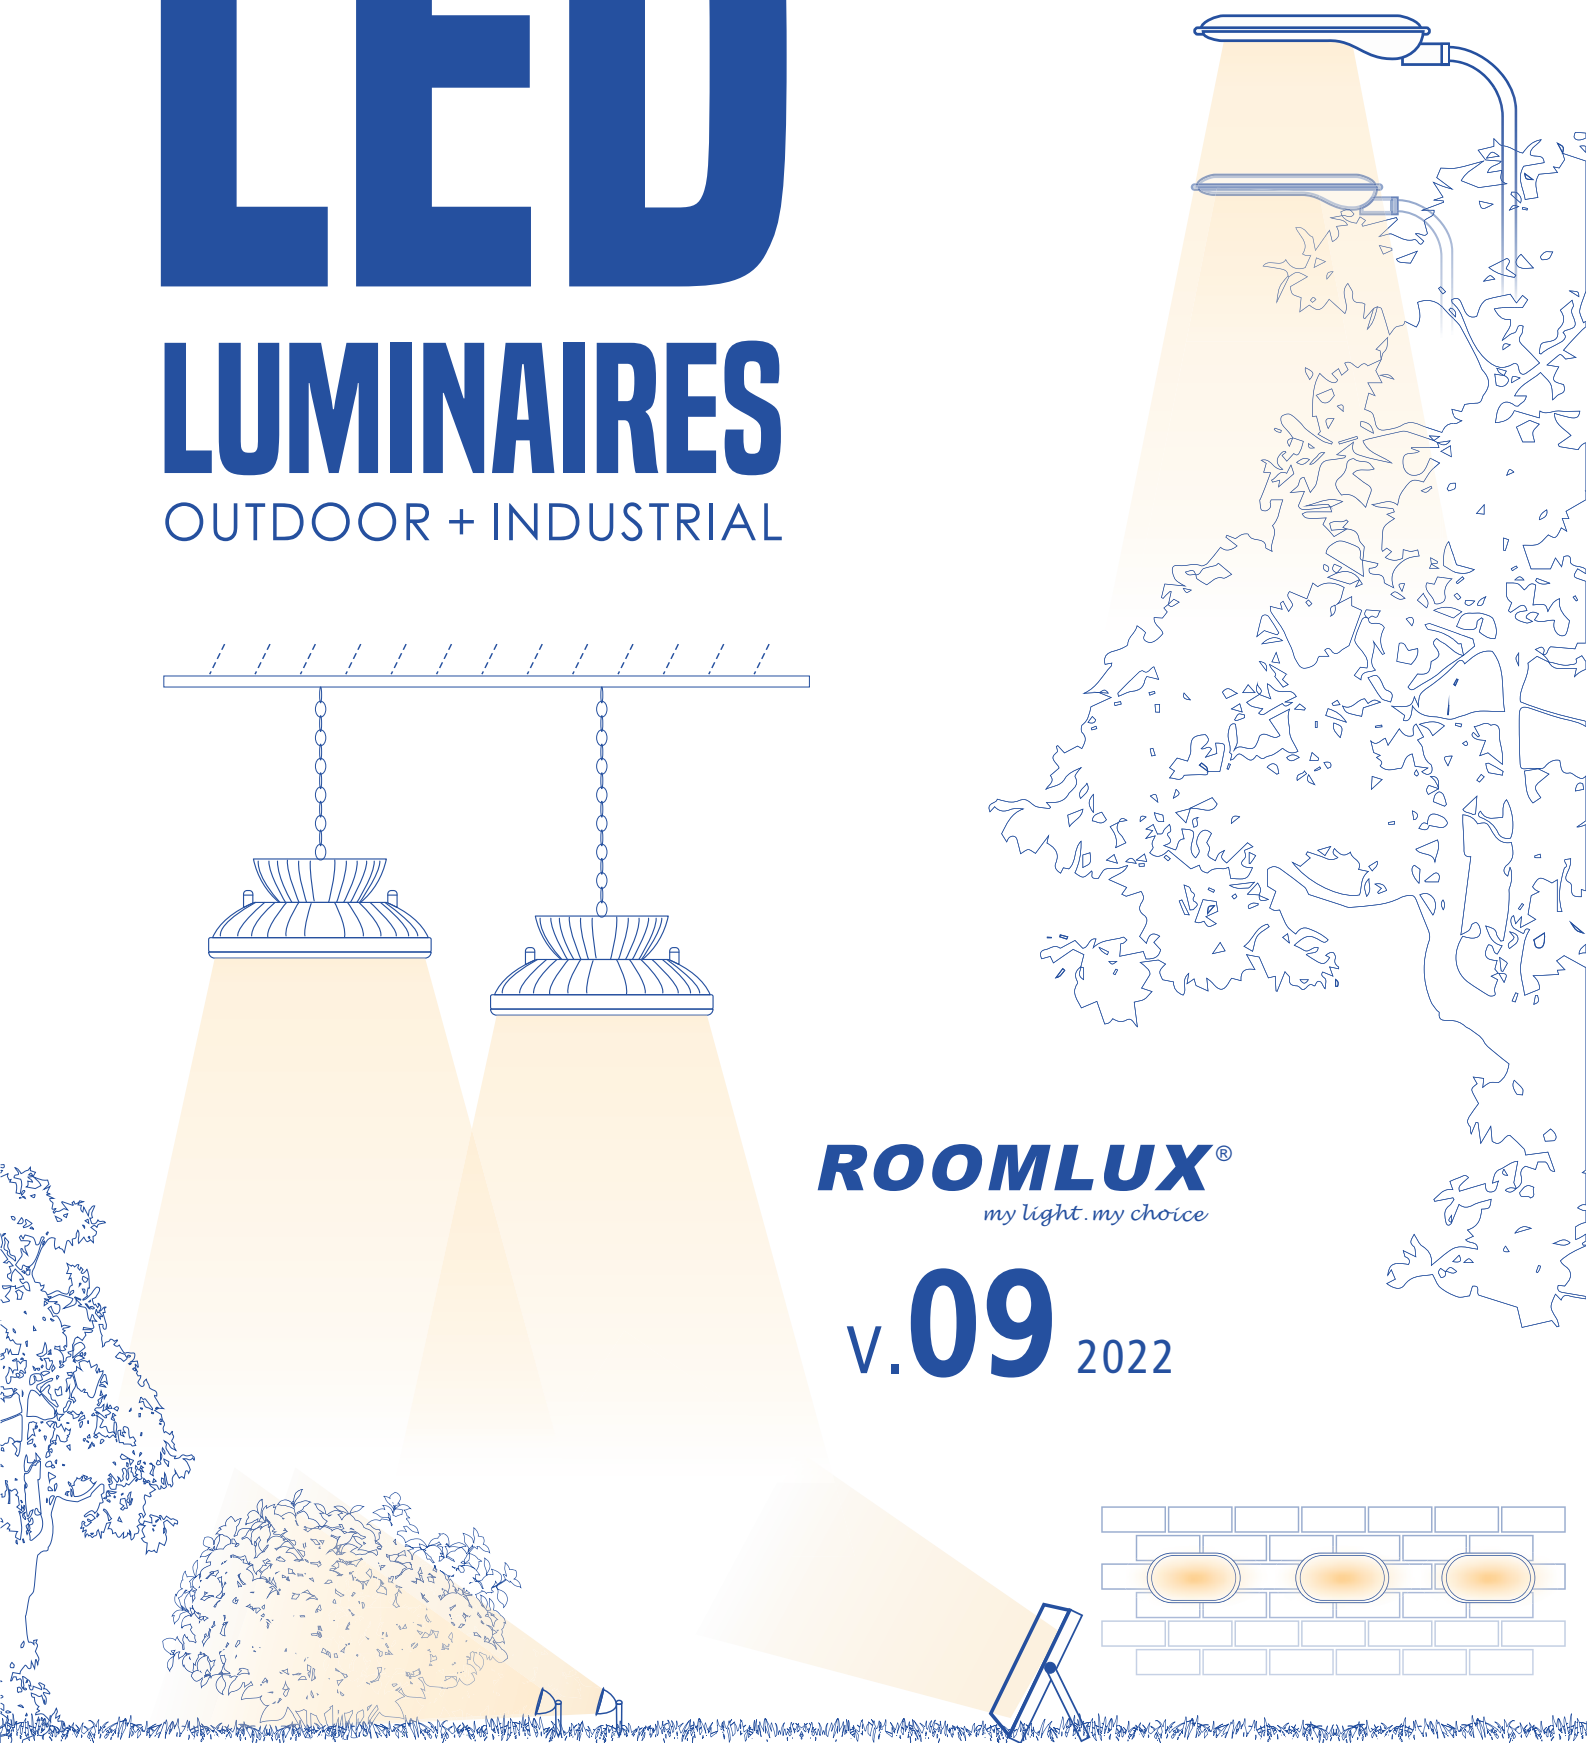

ROOMLUX®

my light. my choice

V.09 2022



ABOUT US

Early since 1990's, Roomlux has engaged in the lighting industry. Starting from traditional incandescent bulb, halogen lamp, fluorescent tube, etc., it has been keeping close pace with development of science and new technology.

Through almost 30 years dedication, Roomlux has built up professional teams and established long term strategy partnership with its carefully selected supply chain plants, most of which are front runners in specific category of products.

In year 2010, Roomlux invested and set up new R&D center and manufacturing base, with land area of 33,300sqm and floor area of 22,000sqm, focusing on research and development and aiming at providing the best LED lighting products.

Roomlux is now serving clients from more than 85 countries and supplying thousands of products covering residential, commercial, industrial and solar lighting, from normal electric bulbs to up-to-date high-tech lighting system.

Abiding by the philosophy of 'Customer First, Pursuit of Perfection', Roomlux has become a reputable name for its wide and comprehensive products collection, superior quality, competitive price and reliable service.

To bring brightness and happiness to every corner of the world, Roomlux shall devote itself to this will and would like to invite clients to join hands with us, to achieve glory and success together.



Sales office



Research and Development



Exhibition



Exhibition



Workshop



Workshop



Waterproof Test



Aging Test

INDEX

WORKLIGHT

Portable	2
Tri-Pod	36
Power Station	38

FLOODLIGHT

Smart	41
RGB	44
3-in-1 CCT Change	45
Basic	46
Ultra Slim	49
Pro	54
COB	60
Modular	61
Solar	63

BULKHEAD

Plastic	68
Metal	78
Unequipped Fixture	82

WALL LIGHT

Wall Light	84
------------------	----

SECURITY

Security Light	88
----------------------	----

LANDSCAPE

Wall Washer	91
Linear Light	92
Step Light	93
Inground Light	95
Spike Light	99
Underwater Light	102
Bollard Light	103
Post Light	106

HIGH BAY

High Bay	110
----------------	-----

EX PROOF

EX Proof	115
----------------	-----

STREET

Street Light	121
--------------------	-----

ROOMLUX® Outdoor & Industrial
my light. my choice



WORKLIGHT



PORTABLE · TRI-POD · POWER STATION











ROOMLUX® work lights have been specially developed to cope with the grueling demands of daily off road use and, due to the materials used, meet the higher expectations for resistance to dirt and moisture in an exceptional manner. The typical **ROOMLUX®** high quality and craftsmanship ensures functionality and longevity at the highest professional level.



Worklight PORTABLE



B43333 - RECHARGEABLE

										
	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
3W	ABS	150Lm	18650 3.7V 900mAH	2.5Hrs	4Hrs	100%–50%–OFF	120°	3000/4000/6500K	1m	210x61x32mm

3W COB LED

On/Off Switch

Adjustable Bracket












+ 3xAAA




B43334 + 3xAAA


IP20 A+ Ra>80 25,000H

								
MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	LxWxH
3W	ABS	250Lm	3xAAA	/	2-4Hrs	100%-50%-OFF	120°	3000/4000/6500K
								210x61x32mm

Worklight PORTABLE

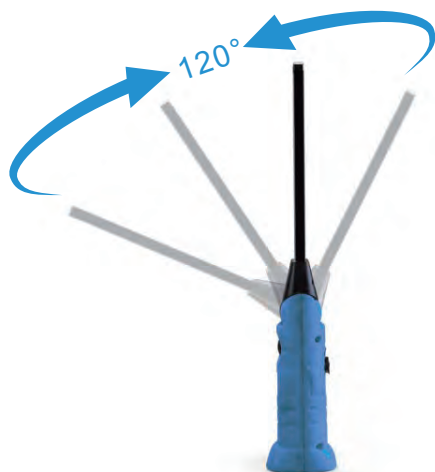


B43330



	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
5W	Alu. +ABS	600Lm	18650 3.7V 2000mAh	5Hrs	2.5-5Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	340x60x60mm




Magnet



B43331

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
3+1W	ABS	250Lm	18650 3.7V 1200mAh	5Hrs	3-6Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	225x60x48mm

Worklight PORTABLE

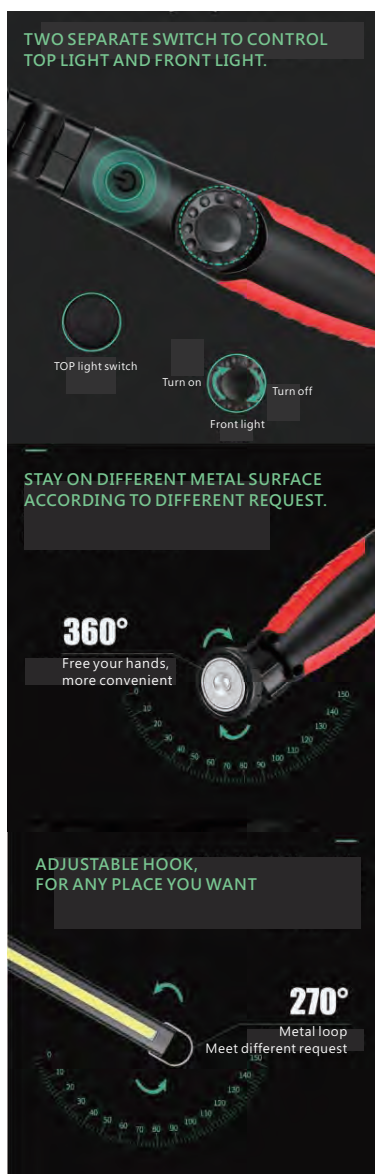

B43348

IP20 A+ Ra>80 25,000H

MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
8+3W ABS	450+70Lm	18650 3.7V 2000mAh	4Hrs	3-8Hrs	Dim. Front-Top-OFF	120°	3000/4000/6500K	1m	34x38x410mm

Worklight PORTABLE



B43349



IP54



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



CABLE



LxWxH

3+1W

ABS

200+60Lm

18650 3.7V 1200mAh

2.5Hrs

2.5-3.5Hrs

100%-50%-Top-OFF

120°

3000/4000/6500K

1m

155x40x25mm

Worklight PORTABLE



Color Option













Adjustable Stand



B43341

IP54 A+ Ra>80 25,000H

										
MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH	
3+3W	ABS	350+80Lm	18650 3.7V 1200mAh	3Hrs	4-7Hrs	30%-100%-Top-OFF	120°	3000/4000/6500K	1m	31x42x154mm

Worklight PORTABLE



Waterproof
USB Port



3W Top Light



5W COB



Battery
Indicator



Hook



180° Stand



Color Option



B43343



IP33



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



CABLE



LxWxH

5+3W

ABS+RUBBER

400+80Lm

18650 3.7V 2000mAh

4Hrs

7Hrs

30%-100%/Top-OFF

120°

3000/4000/6500K

1m

52x34x165mm











Worklight

PORTABLE



B43342

IP54 A+ Ra>80 25,000H

										
MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	ØxH	
3x3W	ABS	400Lm	18650 3.7V 2200mAH	5Hrs	2Hrs	Top-100%-50%-OFF	360°	3000/4000/6500K	1m	70x268mm

Worklight

PORTABLE



IP44 A+ Ra>80 25,000H

MATERIAL LUMENS BATTERY CHARGING RUNNING TIME MODE BEAM CCT CABLE LxWxH

1 B43337

5W	ABS	300Lm	18650 3.7V 4400mAh	3Hrs	3Hrs	5W COB-3W LED OFF	120°	3000/4000/6500K	1m	70x40x260mm
----	-----	-------	--------------------	------	------	-------------------	------	-----------------	----	-------------

2 B43338

3W	ABS	200Lm	18650 3.7V 2000mAh	2-3Hrs	5Hrs	3W LED-3WCOB-16Red LEDs SOS-OFF	120°	3000/4000/6500K	1m	88x45x215mm
3W	ABS	200Lm	Dry-Battery 3xAA	/	5Hrs		120°	3000/4000/6500K	1m	88x45x215mm



With magnet on the base for hands-free operation

Worklight

PORTABLE



B43336

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	MODE	BEAM	CCT	CABLE	LxWxH	
20W	ABS	2000lm	18650 3.7V 4400mAh	3Hrs	3-5Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	150x144x363mm	
20W	ABS	2000lm	18650 3.7V 4400mAh	3Hrs	3-5Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	150x144x363mm	

Worklight PORTABLE



USB Charging & Power Bank



Pocket Work lamp Compact Design

Light source: 10W ultra bright led
Materials: ABS+TPR
Beam angle: 120°
Waterproof grade: IP54



IP54



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



CABLE



LxWxH

1 B43303 - ROUND COB

10W	ABS+TPR	1000Lm	18650 3.7V 4400mAh	5Hrs	3-5Hrs	100%-50%-SOS -FLASH-OFF	120°	3000/4000/6500K	1m	170x127x42mm
-----	---------	--------	--------------------	------	--------	----------------------------	------	-----------------	----	--------------

2 B43304 - ANGULAR COB

10W	ABS+TPR	1000Lm	18650 3.7V 4400mAh	5Hrs	3-5Hrs	100%-50%-SOS -FLASH-OFF	120°	3000/4000/6500K	1m	170x127x42mm
-----	---------	--------	--------------------	------	--------	----------------------------	------	-----------------	----	--------------

ROOMLUX®

Outdoor & Industrial
my light. my choice

Worklight PORTABLE




Multi-functional Portable Work Lamp

- ABS+TPR body
- Color temperature (in Kelvin) available in 3000K/4000K/6000K.
- Beam Angle 120°.
- Compact Size, Pocket Design.




B43305 - BLUETOOTH SPEAKER FOR OPTION



	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CABLE	LxWxH
10W	ABS+TPR	700Lm	18650 3.7V 2x2000mAh	3.5Hrs	2-4Hrs	LED ON-COB ON-FLASH-OFF	120°	1m	148x91x40mm
10W	ABS+TPR	700Lm	18650 3.7V 2x2000mAh	3.5Hrs	2-4Hrs	LED ON-COB ON-OFF	120°	1m	148x91x40mm



B43306 - DRY BATTERY




	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	LxWxH
10W	ABS+TPR	700Lm	4xAA	3.5Hrs	2-4Hrs	LED ON-COB ON-OFF	148x91x40mm

Worklight PORTABLE





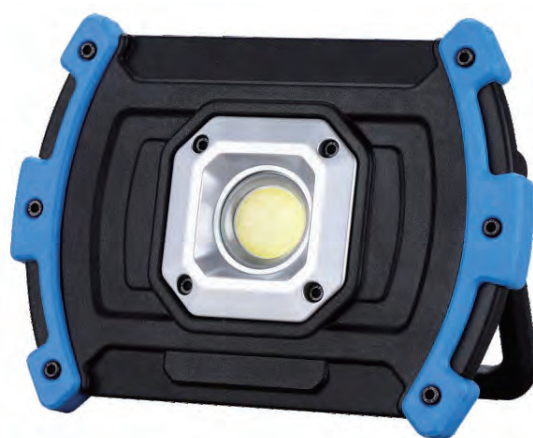








Multi-funtional LED Work Light



B43308

IP65 A+ Ra>80 25,000H

	 MATERIAL	 LUMENS	 BATTERY	 CHARGING	 RUNNING TIME	 LIGHTING MODE	 BEAM	 CCT	 CABLE	 LxWxH
10W	ABS+TPR	1000Lm	18650 3.7V 2x1200mAH	5Hrs	4Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	172x126x48mm
20W	Alu.+ABS	2000Lm	18650 3.7V 3x2000mAH	5Hrs	4Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	172x126x48mm

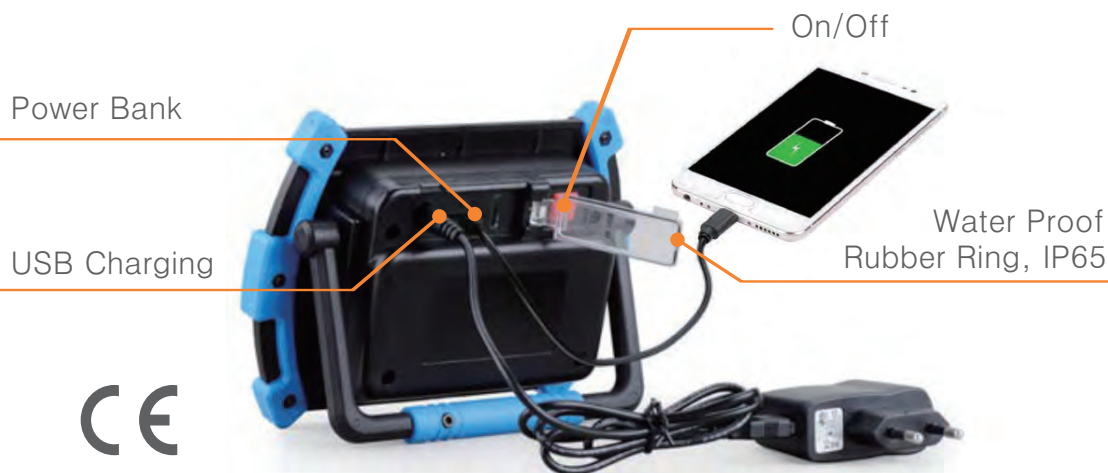

Worklight PORTABLE



B43309 - RECHARGEABLE

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
10W	ABS+TPR	1000Lm	18650 3.7V 5000mAH	5Hrs	4Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	172x150x50mm

IP54
 A+
 Ra>80
 25,000H



B43310 - DRY BATTERY

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	LxWxH
10W	ABS+TPR	1000Lm	6xAA	/	4Hrs	100%-50%-OFF	172x150x50mm

IP44
 A+
 Ra>80
 25,000H

Worklight PORTABLE

Arrival
New

2x10W
Power

ABS+TPR
Material



USB Charging /
Power Bank



5 Step Dimming,
Initial at 50%
(10%/25%/50%/
75%/100%)



4 Super Strong
Magnets

B43312 - RECHARGEABLE



IP54



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



LxWxH

20W

ABS+TPR

2300Lm

Polymer Li-ion 5000mAh

5Hrs

3.5-15Hrs

100%-50%-OFF

120°

3000/4000/6500K

129x170x51mm

Worklight PORTABLE




B43318

IP44 A+ Ra>80 25,000H


	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	MODE	BEAM	CCT	CABLE	LxWxH
20W	ABS	1500Lm	18650 3.7V 4400mAh	3Hrs	With Fan 1-3Hrs Without Fan 2.5-5Hrs	100%-50%-OFF 100%-50%-OFF	120°	3000/4000/6500K	1m	202x346x144mm

Worklight PORTABLE

Colors for Option



- On/Off Switch
- Power Bank
- Power Indicator
- Input

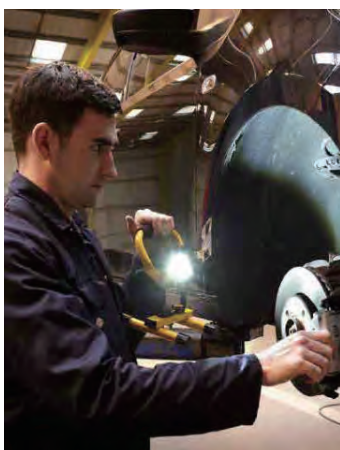

ABS+TPR
Material

Logo

Metal



B43311
COB



B43312
SMD

B43311 - COB LED

B43312 - SMD LED



IP54



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



CABLE



LxW

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxW
10W	ABS+TPR	800Lm	18650 3.7V 2200mAH	3Hrs	3Hrs	100%-50%-SOS-FLASH-OFF	120°	3000/4000/6500K	1m	180x215mm
20W	ABS+TPR	1650Lm	18650 3.7V 4400mAH	5Hrs	4Hrs	100%-50%-SOS-FLASH-OFF	120°	3000/4000/6500K	1m	230x243mm

Worklight PORTABLE

A Variety of Uses

Ideal for the property, work shed, attic, basement, garage, for construction, painters or home decorators



Heavy Duty




360°



Creative design


Back-lock tightening lens
More beautiful appearance
Good waterproof performance

B43357



	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
30W	Aluminum	840Lm	21700 3.7V 5000mAh	4Hrs	4-24Hrs	25%-50%-100%-SOS	90°	3000/4000/6500K	1m	178x197x29mm
50W	Aluminum	1440Lm	21700 3.7V 10000mAh	4Hrs	4-24Hrs	25%-50%-100%-SOS	90°	3000/4000/6500K	1m	205x228x29mm
100W	Aluminum	2160Lm	21700 3.7V 15000mAh	4Hrs	4-24Hrs	25%-50%-100%-SOS	90°	3000/4000/6500K	1m	253x284x31mm

Worklight PORTABLE

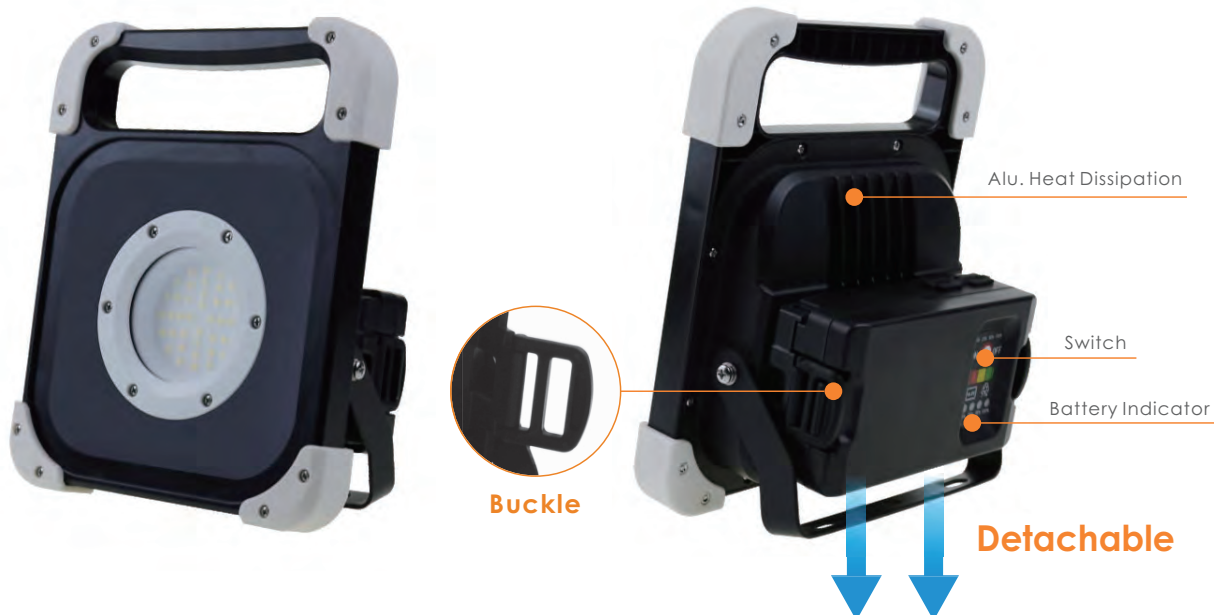

- 30W Rechargeable Worklight
- Detachable Battery Box. 3W Flashlight for Emergency
- Application in Construction, Repairing, Camping, Fishing etc.



**100-265V
Adaptor**

B43326

IP44 A+ Ra>80 25,000H

MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
30W Alu. +PC	3000Lm	18650 14.8V 2200mAH	2.5Hrs	2.5-10Hrs	100%-50%-25%-SOS	120°	3000/4000/6500K	1m	180x225x98mm

Worklight PORTABLE



Rubber Protective
Conner

PC Material

30W High
Brightness Chip



For Option
Music Speaker

Bluetooth®

IK10



2M H07RN-F
3x1.5mm Cable



Heavy Duty
Alu. Housing

1x2 16A Sockets



On/Off Button

B43327

IP54

A+

Ra>80




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
20W	120/230V	1900Lm	120°	Linear	3000/4000/6500K	0.9	Black/Grey	175x220x70mm	25,000H
30W	120/230V	3200Lm	120°	Linear	3000/4000/6500K	0.9	Black/Grey	215x272x72mm	25,000H
50W	120/230V	5200Lm	120°	Linear	3000/4000/6500K	0.9	Black/Grey	250x320x72mm	25,000H

Worklight PORTABLE



B43321 - AC100-265 INPUT

IP65 A+ Ra>80

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
20W	120/230V	1800Lm	120°	Linear	3000/4000/6500K	0.9	Black+Red	240x200x80mm	25,000H
30W	120/230V	2500Lm	120°	Linear	3000/4000/6500K	0.9	Black+Red	240x200x80mm	25,000H



B43322 - RECHARGEABLE

IP54 A+ Ra>80 25,000H

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	LxWxH
20W	Alu.	1800Lm	18650 11.1V 4400mAh	5Hrs	2.5-5Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	240x200x80mm
30W	Alu.	2500Lm	18650 11.1V 5200mAh	5Hrs	2.5-4Hrs	100%-50%-OFF	120°	3000/4000/6500K	1m	240x200x80mm

Worklight PORTABLE

Aluminum Body

High Brightness LED

Portable Work Light
With VDE Plug

1.5M Cable Length
H05RNF3X1.0mm²

Color Option



- Die-casting aluminium body, tempered glass
- Color temperature (in Kelvin) available 2700K, 3000K, 3500K, 4200K, 5000K, 6500K
- Color rendering index (Ra) Ra ≥ 80

RoHS CE



B43301



IP65



A+



Ra > 80




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
30W	120/230V	3000Lm	120°	Linear	3000/4000/6500K	0.9	Orange/Blue/Red/Yellow	180x165x160mm	25,000H
50W	120/230V	5000Lm	120°	Linear	3000/4000/6500K	0.9	Orange/Blue/Red/Yellow	210x190x180mm	25,000H

Worklight PORTABLE



“S” - B43781



“H” - B43782



“F” - B43783



IP65



A+



Ra>80



EARTH




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

1 B43781 - “S” TYPE

10W	85-265V	800Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	124x96x37mm	25,000H
20W	85-265V	1600Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	152x116.5x38mm	25,000H
30W	85-265V	2400Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	185x139x44mm	25,000H
50W	85-265V	4000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	232x175x47.5mm	25,000H

2 B43782 - “H” TYPE

10W	85-265V	800Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	124x96x37mm	25,000H
20W	85-265V	1600Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	152x116.5x38mm	25,000H
30W	85-265V	2400Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	185x139x44mm	25,000H
50W	85-265V	4000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	232x175x47.5mm	25,000H

3 B43783 - “F” TYPE

10W	85-265V	800Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	124x96x37mm	25,000H
20W	85-265V	1600Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	152x116.5x38mm	25,000H
30W	85-265V	2400Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	185x139x44mm	25,000H
50W	85-265V	4000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	232x175x47.5mm	25,000H

Worklight TRI-POD

2x10W

Integrated Worklight



Omni Light
360°



Stand



Magnets



Hook



Tripod Fixture
for Option



FEATURES

- ✓ Double COB light(Controllable)
- ✓ Multi-uses(Magnetio/hookable/tripod)
- ✓ Lithium battery powered(chargeable)
- ✓ 360 degree rotation

B43339



IP54



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



ØxH

2x10W

ABS

1000Lm

18650 3.7V 2x2000mAh

4-5Hrs

4-5Hrs

One Side-Two Side-OFF

360°

3000/4000/6500K

65x650mm

Worklight TRI-POD



B43340

IP54 A+ Ra>80 25,000H

MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	ØxH
2x10W ABS	1000Lm	18650 3.7V 2x2000mAH	4-5Hrs	4-5Hrs	100%-50%-OFF	360°	3000/4000/6500K	65x650mm

Worklight TRI-POD




- Super bright SMD LEDs
- Impact-resistant PC lens glare free
- Lighting mode: 100%-50%-RED SOS-OFF

Rechargeable
Multi-functional Work Light



Power Switch

On/Off Switch

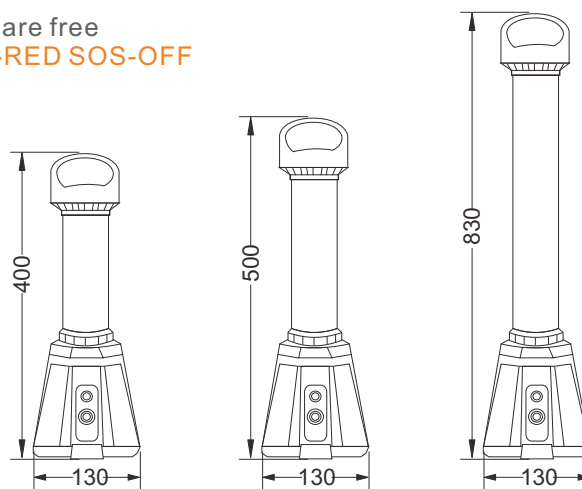

B43316



IP54



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



CABLE





WxH

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	CABLE	WxH
6W	ABS+PC+Alu.	600Lm	18650 7.4V 2200mAH	4.5Hrs	2-4Hrs	100%-50%-RED SOS-OFF	120°	3000/4000/6500K	1m	130x400mm
12W	ABS+PC+Alu.	1000Lm	18650 7.4V 4400mAH	4.5Hrs	4-6Hrs	100%-50%-RED SOS-OFF	120°	3000/4000/6500K	1m	130x500mm
18W	ABS+PC+Alu.	2000Lm	18650 7.4V 6600mAH	4.5Hrs	4-6Hrs	100%-50%-RED SOS-OFF	120°	3000/4000/6500K	1m	130x830mm

Worklight TRI-POD



Rechargeable Multi-functional Work Light

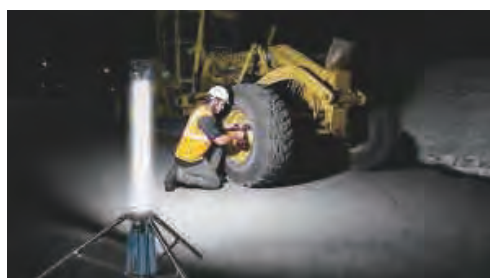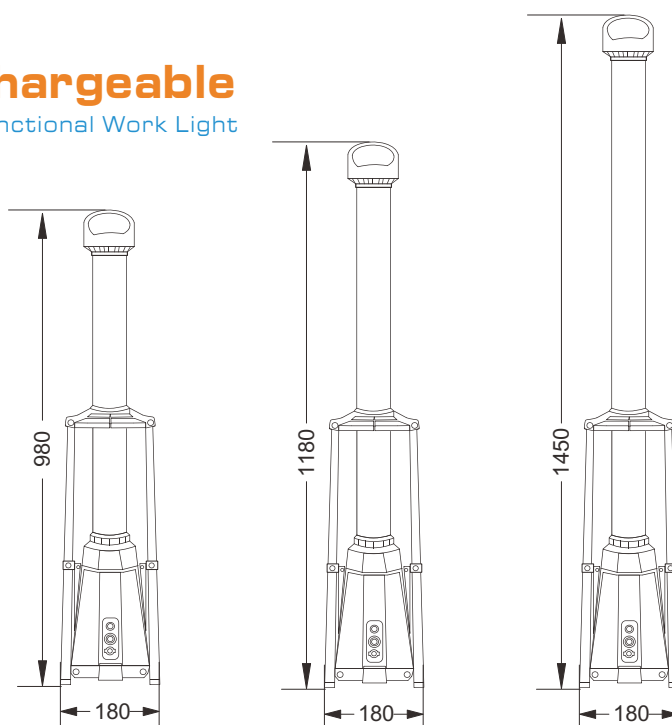

B43320 - RECHARGEABLE



B43792 - AC INPUT



IP54












A+



Ra>80



25,000H

	 MATERIAL	 LUMENS	 BATTERY	 CHARGING	 RUNNING TIME	 LIGHTING MODE	 BEAM	 CCT	 WxH
18W	PC+Alu.	2000Lm	18650 7.4V 6600mAH	5-8Hrs	4-9Hrs	100%-OFF	360°	3000/4000/6500K	180x980mm
24W	PC+Alu.	2800Lm	18650 7.4V 10000mAH	4-8Hrs	4-8Hrs	100%-OFF	360°	3000/4000/6500K	180x1880mm
36W	PC+Alu.	5000Lm	18650 14.8V 11000mAH	4-8Hrs	4-8Hrs	100%-OFF	360°	3000/4000/6500K	180x1450mm
25W	PC+Alu.	1500Lm	AC100-265V	/	/	/	360°	3000/4000/6500K	180x980mm
35W	PC+Alu.	2800Lm	AC100-265V	/	/	/	360°	3000/4000/6500K	180x1880mm
88W	PC+Alu.	5500Lm	AC100-265V	/	/	/	360°	3000/4000/6500K	180x1450mm

Worklight TRI-POD



1 B43323 - AC100-265 INPUT

IP65 A+ Ra>80

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	HEIGHT	LxWxH	LIFE
20W	120/230V	1800Lm	120°	Linear	3000/4000/6500K	0.9	Black+Red	1.5m	240x200x80mm	25,000H
30W	120/230V	2500Lm	120°	Linear	3000/4000/6500K	0.9	Black+Red	1.5m	240x200x80mm	25,000H

2 B43324 - RECHARGEABLE

IP54 A+ Ra>80 25,000H

	MATERIAL	LUMENS	BATTERY	CHARGING	RUNNING TIME	LIGHTING MODE	BEAM	CCT	HEIGHT	LxWxH
20W	Alu.	1800Lm	18650 11.1V 4400mAH	5Hrs	2.5-5Hrs	100%-50%-OFF	120°	3000/4000/6500K	1.5m	240x200x80mm
30W	Alu.	2500Lm	18650 11.1V 5200mAH	5Hrs	2.5-4Hrs	100%-50%-OFF	120°	3000/4000/6500K	1.5m	240x200x80mm

Worklight TRI-POD



+

USB Cable



1 B43315 - SINGLE

2 B43325 - DOUBLE



IP54



A+



Ra>80



25,000H



MATERIAL



LUMENS



BATTERY



CHARGING



RUNNING TIME



LIGHTING MODE



BEAM



CCT



HEIGHT



LxWxH

	30W	50W	Material	Lumens	Battery	Charging	Running Time	Lighting Mode	Beam	CCT	Height	LxWxH
			Plastic+Alu.	2600Lm	18650 7.4V 8000mAh	4.5Hrs	3-7Hrs	100%-50%-OFF	120°	3000/4000/6500K	1.5m	205x190x165mm
			Plastic+Alu.	4500Lm	18650 7.4V 12000mAh	4.5Hrs	3-7Hrs	100%-50%-OFF	120°	3000/4000/6500K	1.5m	255x190x210mm

Worklight TRI-POD



- » Portable and Flexibility - Stading tripod and easy to install and mounted, hang in anywhere as you like
- » Adjustable Tilt-Up to 90° down and 90° up. Position the light exactly where you need it
- » Efficient Heat Dissipation And Long Life Span- The back ribs design to ensure heat dissipation and long life of the internal circuit.



Plastic anti-slip foot cover



Telescopic design adjustable to any height between 2 feet and 5 feet



Triangle support more stable not easy to swing

1 B43787 - ONE HEAD

2 B43797 - TWO HEAD



IP65














A+



Ra>80



EARTH

											
	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	HEIGHT	LENGTH	LIFE
10W	120/230V	800Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	105x77x28mm	1.5m	1.5m	25,000H
20W	120/230V	1600Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	135x98x35mm	1.5m	1.5m	25,000H
30W	120/230V	2400Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	173x126x37mm	1.5m	1.5m	25,000H
50W	120/230V	4000Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	173x126x45mm	1.5m	1.5m	25,000H

ROOMLUX® Outdoor & Industrial
my light. my choice



Worklight

POWER STATION

Power for Your Adventure!

Real Power Up to 167W

45000mAh High Capacitor Battery

Multiple Charging Modes

Modified Pure Sine Wave

Two Lighting Modes

Multiple Output Modes



3 Charging Options



Solar Panel
(Optional)



AC Mains
(Adapter Included)



Car Charging
(Adapter Included)

Worklight

POWER STATION



3 MINI VERSION

Color Option



1 AC100-265V OUTPUT



2 DC OUTPUT

Multi Safety Protection

Battery management system undertakes voltage control, temperature control and more advanced safety operations, ensuring complete protection for you and your devices.



IP20



A+



Ra>80



25,000H



MATERIAL



BATTERY



SOLAR PANEL



CHARGING



MODE



BEAM



LxWxH

1 B68502

Power	Material	Battery	Solar Panel	Charging	Mode	Beam	Dimensions
167W	Alu.+PC	11.1V 45000mAh	18V/3A/Polysilicon	6-8Hrs	Lighting-Anti Insects-SOS-OFF	120°	240x126x133mm

2 B68503

Power	Material	Battery	Solar Panel	Charging	Mode	Beam	Dimensions
167W	Alu.+PC	11.1V 45000mAh	18V/3A/Polysilicon	6-8Hrs	Lighting-Anti Insects-SOS-OFF	120°	240x126x133mm

3 B68504

Power	Material	Battery	Solar Panel	Charging	Mode	Beam	Dimensions
84W	Alu.+PC	11.1V 22500mAh	/	6-8Hrs	Lighting-Anti Insects-SOS-OFF	120°	122x126x133mm

FLOODLIGHT



SMART · RGB · 3-IN-1 CCT CHANGE · BASIC ·
ULTRA SLIM · SOLAR · COB · MODULAR

Thanks to **ROOMLUX**® high lumen output the floodlight performance is a perfect replacement for luminaires with traditional high-pressure discharge lamps. The precise distribution of light with different beam angles also makes it suitable for a wide range of applications. The extremely robust and durable LED luminaire features IP66 and IK08 protection.



Floodlight

SMART FLOODLIGHT



PIR SENSOR SMART



With Fast Connection

Adjust
LUX/TIME/SENS

Inclined Bracket, Easy to Install



140° Detection Angle
10M Sensor Distance



Warm and cold
light adjustment



Time
on/off



Smart
control



Voice
control



Available for
indoors and outdoors

B43710 - WIFI



IP65



A+



Ra>80



EARTH




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	0-800Lm	120°	Linear	WW+CW	0.5	White/Black	133x113x60mm	30,000H
20W	120/230V	0-1600Lm	120°	Linear	WW+CW	0.5	White/Black	157x128x60mm	30,000H

ROOMLUX® Outdoor & Industrial

my light. my choice

Floodlight

SMART FLOODLIGHT



Phonesmart Control
Floodlight RGB+CW



Connection Option



works with
amazon alexa

works with
Google Assistant



Warm and cold
light adjustment



16 million
colors choose



Time
on/off



Smart
control



Voice
control



Color scene
selection



Available for
indoors and outdoors

B43711




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	0-800Lm	120°	Linear/Isolated	RGB+CW	0.5	White/Black	133x88x55mm	30,000H
20W	120/230V	0-1600Lm	120°	Linear/Isolated	RGB+CW	0.5	White/Black	157x101x56mm	30,000H
24W	120/230V	0-1920Lm	120°	Linear/Isolated	RGB+CW	0.5	White/Black	177x117x56mm	30,000H
50W	120/230V	0-4000Lm	120°	Linear/Isolated	RGB+CW	0.9	White/Black	195x152x57mm	30,000H

Floodlight

SMART FLOODLIGHT



Phonesmart Control
Floodlight RGB+CW



SUPPORT:



B43790 - WIFI

B43786 - BLUETOOTH



	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
14W	120/230V	0-1120Lm	120°	Linear	RGB+CW	0.9	White/Black	160x115x60mm	30,000H
24W	120/230V	0-1920Lm	120°	Linear	RGB+CW	0.9	White/Black	208x147x40mm	30,000H
45W	120/230V	0-3600Lm	120°	Linear	RGB+CW	0.9	White/Black	235x170x53mm	30,000H

Floodlight

RGB FLOODLIGHT




High Brightness
RGB LED










3-4m
Remote Control

REMOTE CONTROLLER



B43749 - RGB



	 VOLT	 LUMENS	 BEAM	 DRIVER	 CCT	 PF	 FINISH	 LxWxH	 LIFE
30W	120/230V	800Lm	120°	Linear	Red/Green/Blue	0.9	White/Black	208x147x40mm	30,000H
50W	120/230V	1600Lm	120°	Linear	Red/Green/Blue	0.9	White/Black	235x173x44mm	30,000H

Floodlight

3-IN-1 CCT CHANGE FLOODLIGHT

3-IN-1 CCT Change Floodlight

Three colors in one light. No need stock different CCT lamps, save your money!



ADC#12 Alu. Heat Sink,
Excellent Dissipation



Anti-glare Tempered Glass,
More Uniform Light Output

3-IN-1 CCT CHANGE

- Switch Control, Chips Programmed, CCT Controllable
- Support 3000K | 4000K | 6500K 3 Color Temperatures



6000K 4000K 3000K



B43748




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
50W	120/230V	4000Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	201x145x27mm	30,000H
100W	120/230V	8000Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	276x205x31mm	30,000H
150W	120/230V	12000Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	310x235x35mm	30,000H
200W	120/230V	16000Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	372x282x41mm	30,000H

Floodlight

BASIC FLOODLIGHT



With Cable or
Fast Connection
for Option



1 B43771

2 B43775



	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	800Lm	120°	Linear	3000/4000/6500K	0.5	White/Black	133x95x37mm	30,000H
20W	120/230V	1600Lm	120°	Linear	3000/4000/6500K	0.5	White/Black	160x115x40mm	30,000H
30W	120/230V	2400Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	208x147x40mm	30,000H
50W	120/230V	4000Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	235x173x44mm	30,000H
100W	120/230V	8000Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	316x225x52mm	30,000H

ErP	VOLT	LUMENS	BEAM	DRIVER	CCT	DF	FINISH	LxWxH	LIFE
10W	120/230V	760Lm	120°	Linear	3000/4000/6500K	0.7	White/Black	133x95x37mm	30,000H
20W	120/230V	1560Lm	120°	Linear	3000/4000/6500K	0.7	White/Black	160x115x40mm	30,000H
30W	120/230V	2360Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	208x147x40mm	30,000H
50W	120/230V	4100Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	235x173x44mm	30,000H
100W	120/230V	8200Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	316x225x52mm	30,000H





B43773 - WITH SENSOR



	VOLT	LUMENS	BEAM	CCT	PF	LxWxH	LIFE
10W	120/230V	800Lm	120°	3000/4000/6500K	0.5	163x95x60mm	25,000H
20W	120/230V	1600Lm	120°	3000/4000/6500K	0.5	174x115x60mm	25,000H
30W	120/230V	2400Lm	120°	3000/4000/6500K	0.9	208x147x61mm	25,000H
50W	120/230V	4000Lm	120°	3000/4000/6500K	0.9	235x173x60mm	25,000H
100W	120/230V	8000Lm	120°	3000/4000/6500K	0.9	316x225x66mm	25,000H

Floodlight BASIC FLOODLIGHT

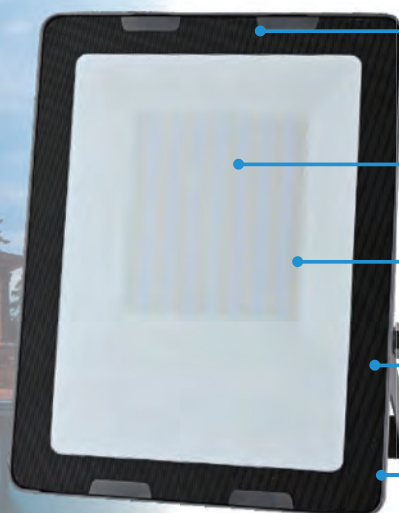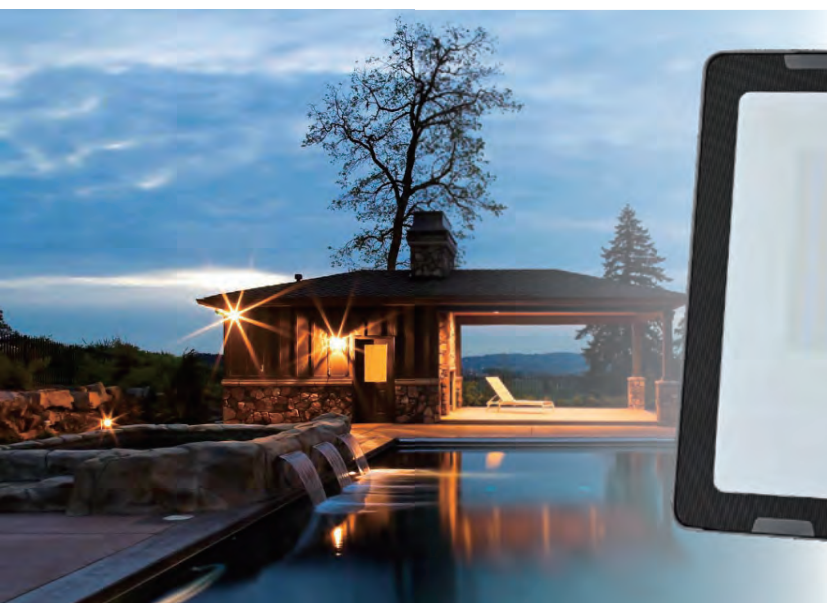


Stainless Buckles More Safe

Anti-glare Glass

High Quality LED Chip

Stainless Screw



Inclined Thick Bracket
Easy to Install



Production Spec.

Alu. Heat Dissipater



- New Item
- Special iPad Model
- Cost-effective
- Slim Design
- Application in Outdoor Places

B43714




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	700Lm	120°	DOB	3000/4000/6500K	0.6	Black/Grey	100x80x27.5mm	30,000H
20W	120/230V	1400Lm	120°	DOB	3000/4000/6500K	0.6	Black/Grey	115x90x27.5mm	30,000H
30W	120/230V	2400Lm	120°	DOB	3000/4000/6500K	0.9	Black/Grey	150x110x27.5mm	30,000H
50W	120/230V	4000Lm	120°	DOB	3000/4000/6500K	0.9	Black/Grey	182x137x31.5mm	30,000H
100W	120/230V	8500Lm	120°	DOB	3000/4000/6500K	0.9	Black/Grey	265x205x34.5mm	30,000H
150W	120/230V	12750Lm	120°	DOB	3000/4000/6500K	0.9	Black/Grey	315x225x40.5mm	30,000H
200W	120/230V	17000Lm	120°	DOB	3000/4000/6500K	0.9	Black/Grey	353x254x40.5mm	30,000H


Floodlight

BASIC FLOODLIGHT

Heavy Duty Frame

10-300W Full Range

Constant Driver Inside 100-265V Input Voltage



Nano Reflector



High Brightness LED Chip



Die-casting Alu. Housing

- Luminaire efficacy: up to 80 lm/W
- Ambient temperature in operation: -20...+50°C
- 1500V high pot

B43718




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH




LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	800Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.5	White/Black	103x68x25mm	30,000H
20W	120/230V	1600Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.5	White/Black	100x80x34mm	30,000H
30W	120/230V	2400Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	132x102x34mm	30,000H
50W	120/230V	4000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	175x130x38mm	30,000H
70W	120/230V	5600Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	220x173x38mm	30,000H
100W	120/230V	8000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	255x195x38mm	30,000H
150W	120/230V	12000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	290x220x45mm	30,000H
200W	120/230V	16000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	340x240x45mm	30,000H
300W	120/230V	24000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	395x290x48mm	30,000H

Floodlight


ULTRA SLIM FLOODLIGHT

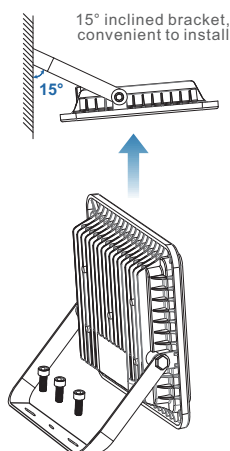

- Integrated cooling design, elegant, efficient
- Streamline design, more beautiful appearance
- ADC 12# die-cast aluminum body, excellent heat sink performance, more durable



PC Lens
High Lumen Efficiency



Rubber Sheathed,
3x0.75mm² Copper Lead.



ADC#12 Alu. Dissipation
Durable Lifetime

B43715



	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	900Lm	120°	Linear	3000/4000/6500K	0.9	White/Black/Grey	122x89x16mm	30,000H
20W	120/230V	1800Lm	120°	Linear	3000/4000/6500K	0.9	White/Black/Grey	140x103x19mm	30,000H
30W	120/230V	2700Lm	120°	Linear	3000/4000/6500K	0.9	White/Black/Grey	167x128x19mm	30,000H
50W	120/230V	4500Lm	120°	Linear	3000/4000/6500K	0.9	White/Black/Grey	213x163x19mm	30,000H
100W	120/230V	9000Lm	120°	Linear	3000/4000/6500K	0.9	White/Black/Grey	277x214x19mm	30,000H
150W	120/230V	13500Lm	120°	Linear	3000/4000/6500K	0.9	White/Black/Grey	331x230x26mm	30,000H
200W	120/230V	18000Lm	120°	Linear	3000/4000/6500K	0.9	White/Black/Grey	379x281x38mm	30,000H

Floodlight

ULTRA SLIM FLOODLIGHT



Fast Connection for Option



Inclined Bracket,
Easy to Install



B43766

IP65 A+ Ra>80 EARTH

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	800Lm	120°	Linear	3000/4000/6500K	0.5	Black	85x85x21mm	30,000H
20W	120/230V	1600Lm	120°	Linear	3000/4000/6500K	0.5	Black	117x100x20mm	30,000H
30W	120/230V	2400Lm	120°	Linear	3000/4000/6500K	0.9	Black	146x148x30mm	30,000H
50W	120/230V	4000Lm	120°	Linear	3000/4000/6500K	0.9	Black	182x172x30mm	30,000H
100W	120/230V	8000Lm	120°	Linear	3000/4000/6500K	0.9	Black	242x210x35mm	30,000H

	VOLT	LUMENS	BEAM	DRIVER	CCT	DF	FINISH	LxWxH	LIFE
10W	120/230V	800Lm	120°	Linear	3000/4000/6500K	0.8	Black	85x85x21mm	30,000H
20W	120/230V	1600Lm	120°	Linear	3000/4000/6500K	0.8	Black	117x100x20mm	30,000H
30W	120/230V	2400Lm	120°	Linear	3000/4000/6500K	0.9	Black	146x148x30mm	30,000H
50W	120/230V	4000Lm	120°	Linear	3000/4000/6500K	0.9	Black	182x172x30mm	30,000H
100W	120/230V	8000Lm	120°	Linear	3000/4000/6500K	0.9	Black	242x210x35mm	30,000H



B43726 - WITH SENSOR

IP44 A+ Ra>80 EARTH

	VOLT	LUMENS	BEAM	CCT	PF	LxWxH	LIFE
10W	120/230V	800Lm	120°	3000/4000/6500K	0.9	85x110x57mm	30,000H
20W	120/230V	1600Lm	120°	3000/4000/6500K	0.9	117x125x57mm	30,000H
30W	120/230V	2400Lm	120°	3000/4000/6500K	0.9	146x148x57mm	30,000H
50W	120/230V	4000Lm	120°	3000/4000/6500K	0.9	182x173x57mm	30,000H
100W	120/230V	8000Lm	120°	3000/4000/6500K	0.9	242x210x58mm	30,000H

Floodlight

ULTRA SLIM FLOODLIGHT


ADC12# Alu. Housing
One-time Die Casting

High Bright LED

IK07 Tempered
Glass

Pure Copper Screw

2.5mm Strong
Thickness Bracket



Wireless Connection Mode for Option



Independent PIR Sensor for choice




Plastic cover,
protect screw



Respiratory
system design

- Aid sealant, vapor absorption from inside.
- High brightness SMD LED, up to 100Lm/W.
- 1500V high pot.
- Surge protection:1000V (10W/20W);
2000V (30W above).

15° inclined bracket,
convenient to install

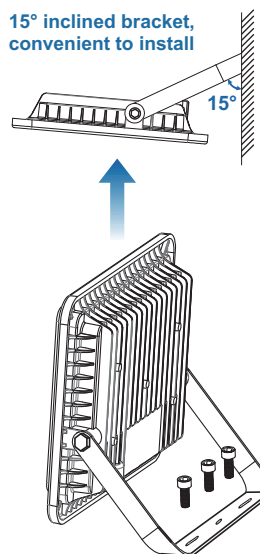

B43770




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE


	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	800Lm	120°	Linear/Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black/Grey	103x83x24mm	30,000H
20W	120/230V	1600Lm	120°	Linear/Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black/Grey	121x95x26mm	30,000H
30W	120/230V	2400Lm	120°	Linear/Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black/Grey	160x122x30mm	30,000H
50W	120/230V	4000Lm	120°	Linear/Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black/Grey	206x160x30mm	30,000H
100W	120/230V	8000Lm	120°	Linear/Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black/Grey	270x210x32mm	30,000H
150W	120/230V	12000Lm	120°	Linear/Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black/Grey	330x250x32mm	30,000H
200W	120/230V	16000Lm	120°	Linear/Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black/Grey	370x270x32mm	30,000H

Floodlight


ULTRA SLIM FLOODLIGHT



- Small, simple but big difference.
- Fashion leading ultra slim design.
- Application in building, garden, parking and external lighting.



Anti-glare and uniform light



High brightness and more real color

B43765



IP65



A+



Ra>80



EARTH




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	800Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	117x109x27mm	30,000H
20W	120/230V	1600Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	134x130x28mm	30,000H
30W	120/230V	2400Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	167x170x36mm	30,000H
50W	120/230V	4000Lm	120°	Linear	3000/4000/6500K	0.9	White/Black	222x240x38mm	30,000H

Floodlight PRO FLOODLIGHT



IK07 Tempered Glass

High Efficiency LED Chip

Logo

Pure Copper Connector



2



PC Reflector
High Transmittance

Respirator Design,
Let Floodlight Breathe



Muti-functional Respirator



30cm H05R-F Cable

Stainless Screw with
Plastic Cover Protection




2.5mm Durable and
Hardware Bracket

ADC12#
Alu. Housing

Thick
Heat Dissipater

Waterproof Ring,
IP65 Performance



1 B43761 - 120°


10W	120/230V	900Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	87x100x22mm	30,000H
20W	120/230V	1800Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	104x120x23mm	30,000H
30W	120/230V	2700Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	136x160x31mm	30,000H
50W	120/230V	4500Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	154x195x32mm	30,000H
100W	120/230V	9000Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	199x234x33mm	30,000H
150W	120/230V	13500Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	230x267x33mm	30,000H
200W	120/230V	18000Lm	120°	Linear	3000/4000/6500K	0.9	Grey/Black	265x308x33mm	30,000H

2 B43763 - 90°

10W	120/230V	900Lm	90°	Linear/Non-isolated	3000/4000/6500K	0.9	Grey/Black	87x100x22mm	30,000H
20W	120/230V	1800Lm	90°	Linear/Non-isolated	3000/4000/6500K	0.9	Grey/Black	104x120x23mm	30,000H
30W	120/230V	3000Lm	90°	Linear/Non-isolated	3000/4000/6500K	0.9	Grey/Black	136x160x31mm	30,000H
50W	120/230V	5000Lm	90°	Linear/Non-isolated	3000/4000/6500K	0.9	Grey/Black	154x195x32mm	30,000H
100W	120/230V	10000Lm	90°	Linear/Non-isolated	3000/4000/6500K	0.9	Grey/Black	199x234x33mm	30,000H
150W	120/230V	13500Lm	90°	Linear/Non-isolated	3000/4000/6500K	0.9	Grey/Black	230x267x33mm	30,000H
200W	120/230V	18000Lm	90°	Linear/Non-isolated	3000/4000/6500K	0.9	Grey/Black	265x308x33mm	30,000H

Floodlight

PRO FLOODLIGHT



100Lm/W



Excellent Heat
Dissipation

Stainless Screw
IP65 Waterproof

170° Rotatable
Easy to Mount

Inclined Bracket
Easy to Install



3x0.75mm²
copper lead, rubber wire

B43713




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
20W	120/230V	1800Lm	120°	Isolated	3000/4000/6500K	0.9	Black/Grey	182x115x41mm	30,000H
50W	120/230V	5000Lm	120°	Isolated	3000/4000/6500K	0.9	Black/Grey	286x189x55mm	30,000H
100W	120/230V	10000Lm	120°	Isolated	3000/4000/6500K	0.9	Black/Grey	375x251x64mm	30,000H
150W	120/230V	15000Lm	120°	Isolated	3000/4000/6500K	0.9	Black/Grey	530x335x80mm	30,000H
200W	120/230V	20000Lm	120°	Isolated	3000/4000/6500K	0.9	Black/Grey	530x335x80mm	30,000H

Floodlight

PRO FLOODLIGHT



Heavy Duty Alu. Housing
Excellent Heat Radiator

Full Range Floodlight

- Alu. and Nano Reflector
- Tempered Glass Cover, High Transmittance
- IP65 Copper Screw, Metal Buckle to Protect Glass



Intelligent IC driver with circuit,
overload, overtemperature, protection



B43720




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	1100Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	125x170x45mm	30,000H
20W	120/230V	2200Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	170x230x55mm	30,000H
30W	120/230V	3200Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	180x240x65mm	30,000H
50W	120/230V	5800Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	225x280x65mm	30,000H
100W	120/230V	10000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	280x352x90mm	30,000H
150W	120/230V	15000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	315x444x95mm	30,000H
200W	120/230V	20000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	380x500x105mm	30,000H
300W	120/230V	32000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	435x550x110mm	30,000H

Floodlight

PRO FLOODLIGHT



- ADC12# Alu. ,good heat dissipation.
- 1500V high pot.
- Surge protection:
1500V (10W/20/30W)
2500V (50W above)
- Waterproof IP 65,for outdoor lighting.



5730 San'an chip,
high lumens 90LM/W



3x0.75mm² copper lead,
PVC wire

B43725




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	85-265V	800Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.5	White/Black	115x115x39mm	30,000H
20W	85-265V	1600Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.5	White/Black	180x176x43mm	30,000H
30W	85-265V	2400Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.5	White/Black	180x176x43mm	30,000H
50W	85-265V	4000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	226x220x50mm	30,000H
100W	85-265V	8000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	282x271x63mm	30,000H
150W	85-265V	12000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	302x282x78.5mm	30,000H
200W	85-265V	16000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	367x337x86mm	30,000H
300W	85-265V	24000Lm	120°	Non-isolated/Isolated	3000/4000/6500K	0.9	White/Black	430x400x78.2mm	30,000H

Floodlight

COB FLOODLIGHT




THERMAL DESIGN

The Lamp Body is Made of High-purity and Thick Die-casting Alu. Alloy, Which has Anti-corrosion and Fast Heat Dissipation



110Lm/W High Brightness



Excellent Alu. Radiator



Top Quality Metal Screw



170° Rotation

B43721




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
10W	120/230V	1100Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	205x140x50mm	30,000H
30W	120/230V	3300Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	250x168x66mm	30,000H
70W	120/230V	7700Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	368x253x93mm	30,000H
120W	120/230V	13200Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	455x335x113mm	30,000H
200W	120/230V	22000Lm	120°	Isolated/Non-isolated	3000/4000/6500K	0.9	White/Black	563x428x140mm	30,000H

Floodlight


MODULAR FLOODLIGHT

50-600W

High Power Floodlight for Industrial Lighting



Philips 3030 LED
High Efficiency



Die-casting aluminium
housing with fan-like
heatsinks, superior
dissipation



Waterproof rate IP66
stainless screws



Bright



Low Heat



Good Quality



IP66

B43796 - 50~600W



IP66



A+



Ra>70



EARTH




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
50W	120/230V	6500Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	85x321x125mm	30,000H
100W	120/230V	13000Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	170x321x125mm	30,000H
150W	120/230V	19500Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	255x321x125mm	30,000H
200W	120/230V	26000Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	340x321x125mm	30,000H
250W	120/230V	32500Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	425x321x125mm	30,000H
300W	120/230V	39000Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	510x321x125mm	30,000H
400W	120/230V	52000Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	510x681x125mm	30,000H
500W	120/230V	65000Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	425x681x125mm	30,000H
600W	120/230V	78000Lm	110°	Linear/Isolated	3000/4000/6500K	0.9	Grey/Black	340x681x125mm	30,000H

ROOMLUX® Outdoor & Industrial

my light. my choice

Floodlight

MODULAR FLOODLIGHT



PHILIPS

200-2000W


High Power Floodlight

Module Design

Professional in Building & Engineering Lighting



Stainless Steel Screw



High Quality Alu. Dissipator



Top Brand Driver in Box



Original PHILIPS LED

B43798- 200~2000W



IP66



A+



Ra>70



EARTH




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE
200W	120/230V	3000Lm	30°/60°	Isolated	3000/4000/6500K	0.9	Black	185x373x120mm	50,000H
400W	120/230V	60000Lm	30°/60°	Isolated	3000/4000/6500K	0.9	Black	370x373x120mm	50,000H
600W	120/230V	90000Lm	30°/60°	Isolated	3000/4000/6500K	0.9	Black	555x373x139mm	50,000H
800W	120/230V	120000Lm	30°/60°	Isolated	3000/4000/6500K	0.9	Black	740x373x139mm	50,000H
1200W	120/230V	180000Lm	30°/60°	Isolated	3000/4000/6500K	0.9	Black	925x373x139mm	50,000H
1600W	120/230V	240000Lm	30°/60°	Isolated	3000/4000/6500K	0.9	Black	555x745x139mm	50,000H
2000W	120/230V	300000Lm	30°/60°	Isolated	3000/4000/6500K	0.9	Black	739x745x139mm	50,000H

Floodlight


SOLAR FLOODLIGHT

200W Solar Floodlight-170Lm/W

Remote Control, More Convenient & More Energy-saving!



Philips LED Chips
170Lm/w



Alu. Frame
Glass
Solar Cell
Backplane
Junction Box



3.2V 20Ah, Long working time



120° Beam Angle Alu Reflector



120° Beam Angle PC Reflector



90° Beam Angle PC Reflector

B43780



IP65



A+



Ra>80



25,000H



MATERIAL



BATTERY



SOLAR PANEL



CHARGING



RUNNING TIME



BEAM



CCT




LxWxH

	MATERIAL	BATTERY	SOLAR PANEL	CHARGING	RUNNING TIME	BEAM	CCT	LxWxH
50W	Aluminum	32650 3.2V 6,000mAH	5V/8W/Polysilicon	6Hrs	12Hrs	90°/120°	3000/4000/6500K	210x175x50mm
100W	Aluminum	32650 3.2V 15,000mAH	5V/15W/Polysilicon	6Hrs	12Hrs	90°/120°	3000/4000/6500K	260x200x50mm
200W	Aluminum	32650 3.2V 20,000mAH	5V/20W/Polysilicon	6Hrs	12Hrs	90°/120°	3000/4000/6500K	310x255x50mm
300W	Aluminum	32650 3.2V 20,000mAH	5V/30W/Polysilicon	6Hrs	12Hrs	90°/120°	3000/4000/6500K	310x255x50mm
400W	Aluminum	32650 3.2V 30,000mAH	5V/40W/Polysilicon	6Hrs	12Hrs	90°/120°	3000/4000/6500K	370x310x65mm
500W	Aluminum	32650 3.2V 40,000mAH	5V/50W/Polysilicon	6Hrs	12Hrs	90°/120°	3000/4000/6500K	370x310x65mm

Floodlight

SOLAR FLOODLIGHT

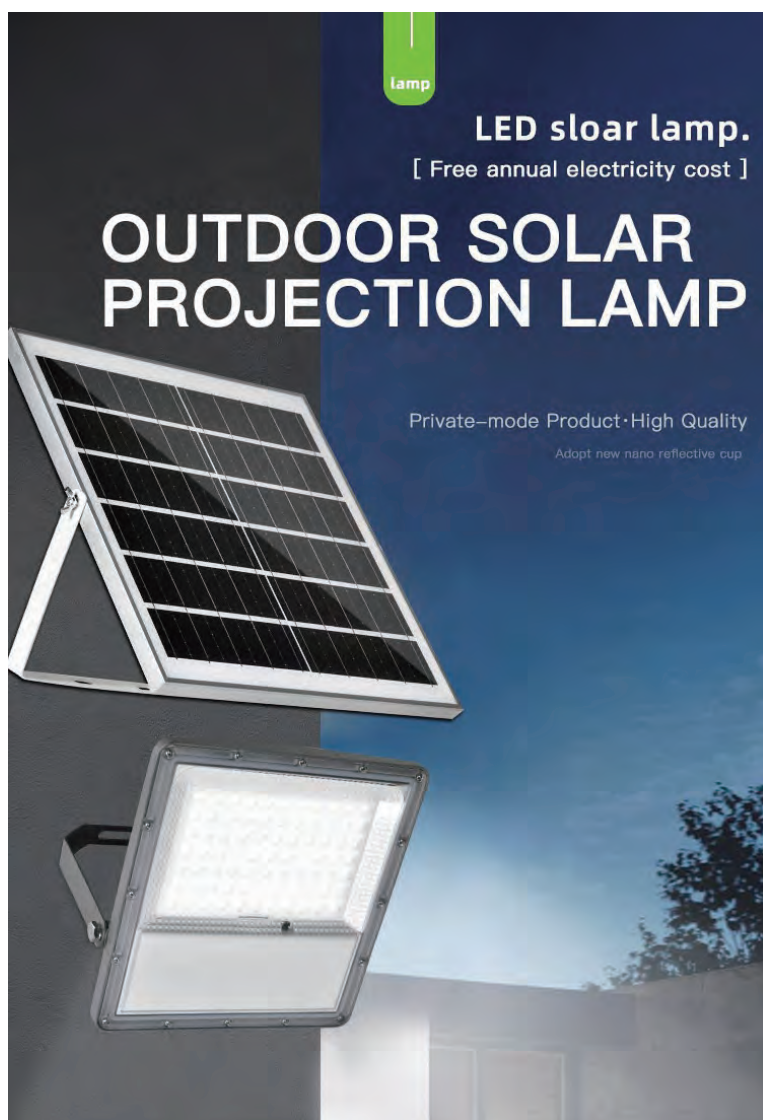

FLEXIBLE SWIVEL BRACKET

Aluminum Bracket, anti-corrosion, rustproof, 180° flexible adjustment.



DETAILS




Die-casting Aluminum Lamp Body

Preferred high quality thickened die cast aluminum, high efficiency heat dissipation, high temperature resistance, corrosion resistance, aging

High Lumen LED Chip

Adopting high-transmittance lens+high lumen LED chip-high brightness, low decay, free flicker, good constant current stability, long lifespan



B43782



MATERIAL



BATTERY



SOLAR PANEL



CHARGING



RUNNING TIME



BEAM



CCT



LxWxH

	MATERIAL	BATTERY	SOLAR PANEL	CHARGING	RUNNING TIME	BEAM	CCT	LxWxH
100W	Aluminum	32650 3.2V 10,000mAh	6V/12W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	212x195x42mm
200W	Aluminum	32650 3.2V 15,000mAh	6V/18W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	233x224x45mm
300W	Aluminum	32650 3.2V 20,000mAh	6V/24W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	274x247x45mm

Floodlight

SOLAR FLOODLIGHT



B43746

IP65 A+ Ra>80 25,000H

	MATERIAL	BATTERY	SOLAR PANEL	CHARGING	RUNNING TIME	BEAM	CCT	LxWxH
15W	Aluminum	18650 3.2V 2000mAh	6V/12W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	160x140x32mm
30W	Aluminum	18650 3.2V 4000mAh	6V/15W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	194x167x35mm
60W	Aluminum	32650 3.2V 12,000mAh	6V/22W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	219x198x45mm
100W	Aluminum	32650 3.2V 20,000mAh	6V/15W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	260x228x45mm
150W	Aluminum	32650 3.2V 30,000mAh	6V/22W/Polysilicon	6-8Hrs	10-12Hrs	90°	3000/4000/6500K	314x274x45mm

Floodlight

SOLAR FLOODLIGHT

Aluminum shell
at **customer's option**




HIGH QUALITY SOLAR PANELS

Made of polysilicon panels, it has a Higher Photoelectric Conversion Rate—18%, faster charge particular in a sunny day, only 4-6 hours can it make a full charge.

Charging Time:
4-6 hours

Power of Solar Panel:
10V, 35W

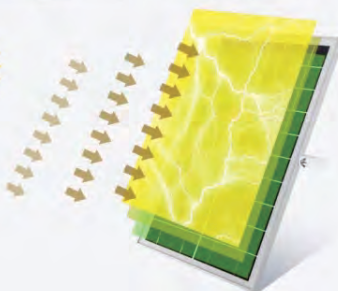


High Color Rendering
CRI>80

Higher Lumen
1150Lm

Lower Heat
Working temps:-15°C ~ 45°C

Wider Lighting Area
120° beam angle



B43738



IP65



A+



Ra>80



25,000H



MATERIAL



BATTERY



SOLAR PANEL



CHARGING



RUNNING TIME



BEAM



CCT




LxWxH

	MATERIAL	BATTERY	SOLAR PANEL	CHARGING	RUNNING TIME	BEAM	CCT	LxWxH
25W	ABS	32650 3.2V 5,000mAH	5V/6W/Polysilicon	6-8Hrs	10-12Hrs	120°	3000/4000/6500K	182x56x156mm
60W	ABS	32650 3.2V 10,000mAH	5V/10W/Polysilicon	6-8Hrs	10-12Hrs	120°	3000/4000/6500K	249x221x80mm
100W	ABS	32650 3.2V 20,000mAH	5V/20W/Polysilicon	6-8Hrs	10-12Hrs	120°	3000/4000/6500K	296x260x90mm

ROOMLUX® Outdoor & Industrial
my light. my choice

BULKHEAD




PLASTIC · METAL · FIXTURE

ROOMLUX® bulkheads are outstanding waterproof design, adaptable in rough environment. Up to 90% energy saving comparing to conventional wall lamp, Impact resistant, long life, low maintenance cost.





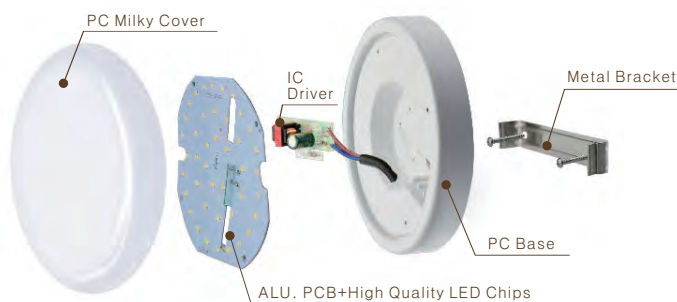






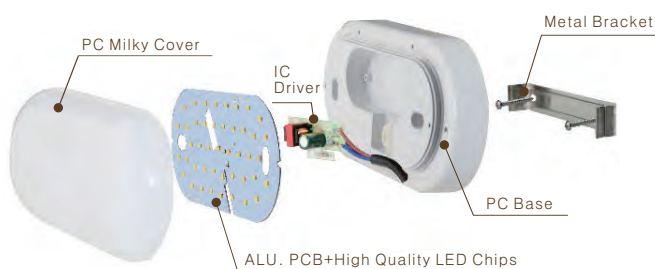
Bulkhead PLASTIC IP54



B74320 - PC+PC












									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	155x52mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	155x52mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x52mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x52mm	25,000H
20W	120/230V	1600Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x52mm	25,000H
22W	120/230V	1760Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x52mm	25,000H



B74325 - PC+PC



									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	160x89x46mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	198x98x46mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	198x98x46mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	230x103x46mm	25,000H
20W	120/230V	1600Lm	120°	3000/4000/6500K	>80	A+	White/Black	230x103x46mm	25,000H










Bulkhead

PLASTIC IP65



B74360 - PC+PC












	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 ØxH	 LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White	160x43mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White	160x43mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White	160x43mm	25,000H



B74365 - PC+PC



	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 LxWxH	 LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White	175x98x45mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White	175x98x45mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White	175x98x45mm	25,000H










Bulkhead

PLASTIC IP65



B74380 - ABS+PC












									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x58mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x58mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x60mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x60mm	25,000H



B74385 - ABS+PC












									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	195x95x60mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	195x95x60mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	225x100x60mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	225x100x60mm	25,000H


Bulkhead PLASTIC IP65



B74370- ABS+PC





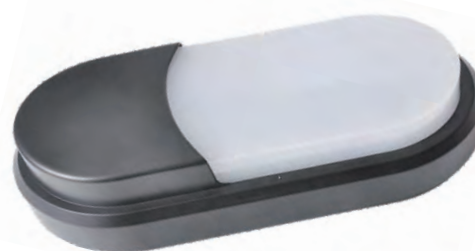






									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x58mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x58mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x60mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x60mm	25,000H



B74375 - ABS+PC












									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	195x95x60mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	195x95x60mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	225x100x60mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	225x100x60mm	25,000H

Bulkhead

PLASTIC IP65












B74330 - PC+PC

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
5W	120/230V	400Lm	120°	3000/4000/6500K	>80	A+	White/Black	140x60mm	25,000H
7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	White/Black	140x60mm	25,000H
9W	120/230V	720Lm	120°	3000/4000/6500K	>80	A+	White/Black	140x60mm	25,000H



B74335 - PC+PC










									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
5W	120/230V	400Lm	120°	3000/4000/6500K	>80	A+	White/Black	171x71x45mm	25,000H
7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	White/Black	171x71x45mm	25,000H
5W	120/230V	400Lm	120°	3000/4000/6500K	>80	A+	White/Black	195x105x55mm	25,000H
7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	White/Black	195x105x55mm	25,000H
9W	120/230V	720Lm	120°	3000/4000/6500K	>80	A+	White/Black	195x105x55mm	25,000H

Bulkhead

PLASTIC IP65












B74300 - PC+PC

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x75mm	25,000H
9W	120/230V	720Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x75mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x75mm	25,000H




B74350 - PC+PC

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
5W	120/230V	400Lm	120°	3000/4000/6500K	>80	A+	White/Black	212x118x66mm	25,000H
7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	White/Black	212x118x66mm	25,000H
9W	120/230V	720Lm	120°	3000/4000/6500K	>80	A+	White/Black	212x118x66mm	25,000H

Bulkhead

PLASTIC IP65

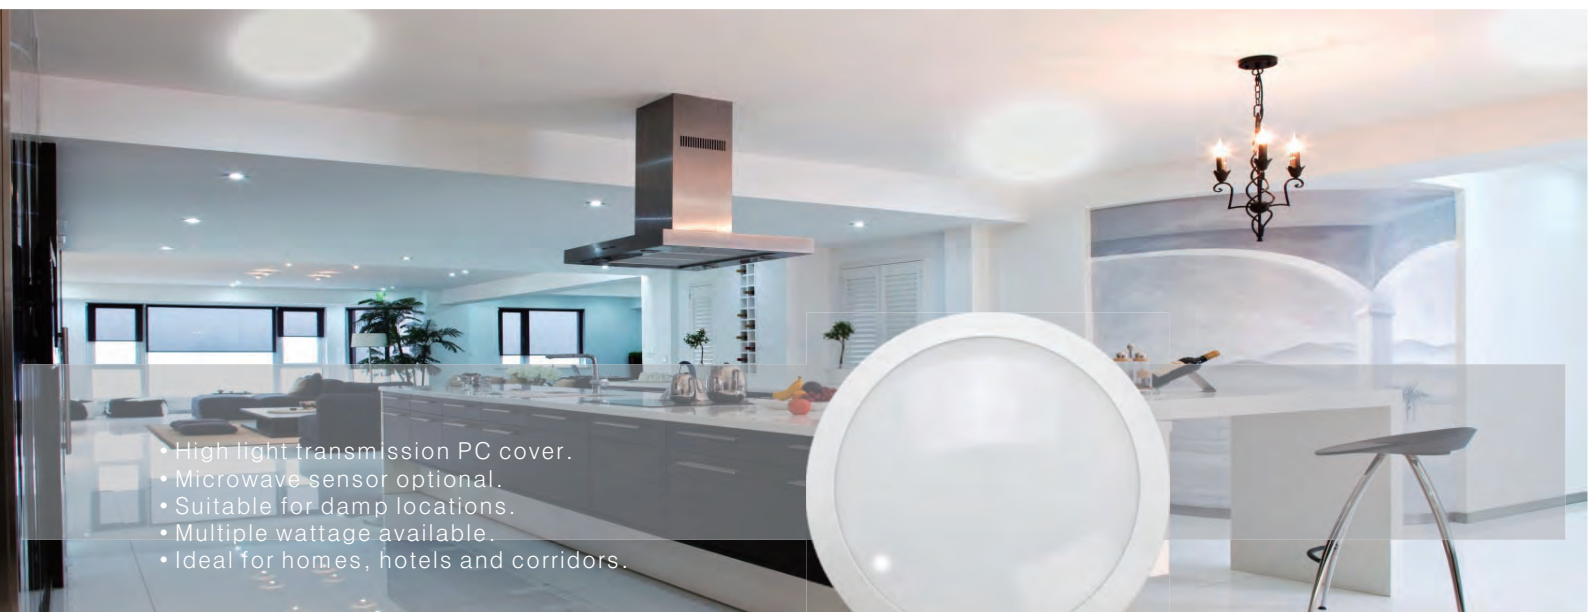

- High light transmission PC cover.
- Microwave sensor optional.
- Suitable for damp locations.
- Multiple wattage available.
- Ideal for homes, hotels and corridors.

B27300 - PC + PC












IP65



IK10



NON-DIM

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
12W	120/230V	1000Lm	120°	3000/4000/6500K	>80	A+	White/Black	308x88mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	308x88mm	25,000H
18W	120/230V	1450Lm	120°	3000/4000/6500K	>80	A+	White/Black	350x103mm	25,000H
24W	120/230V	2000Lm	120°	3000/4000/6500K	>80	A+	White/Black	350x103mm	25,000H



B27310 - PC + PC



IP65



IK10








A+



Ra>80



NON-DIM


							
	VOLT	LUMENS	BEAM	CCT	FINISH	LxWxH	LIFE
12W	120/230V	1000Lm	120°	3000/4000/6500K	White/Black	299x299x78mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	White/Black	299x299x78mm	25,000H

Bulkhead

PLASTIC POLO CIRCULAR



Optional finished Trim

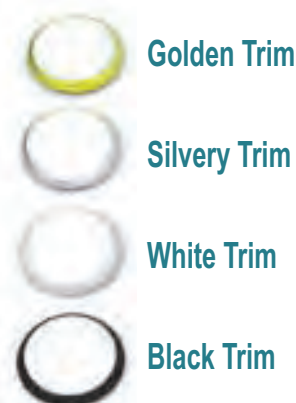

Optional



Movement
Sensor



NI-CD Pack
9.6V 1Ah












NI-MH Pack
9.6V 1Ah

- Easy assembly
- No buzzing sound
- Even beam pattern
- High colour fidelity
- Corrosion resistant suitable for coastal locations
- Opal or prismatic polycarbonate diffuser
- Optional movement sensor & 3hrs emergency
- 5 year Guarantee

B74370 - POLO CIRCULAR



NON-DIM

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	ØxH	LIFE
8W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	Golden/Silver/White/Black	270x90mm	50,000H
15W	120/230V	1500Lm	120°	3000/4000/6500K	>80	A+	Golden/Silver/White/Black	320x100mm	50,000H
18W	120/230V	1800Lm	120°	3000/4000/6500K	>80	A+	Golden/Silver/White/Black	320x80mm	50,000H

Bulkhead

PLASTIC DRUM CIRCULAR



Optional



Movement
Sensor












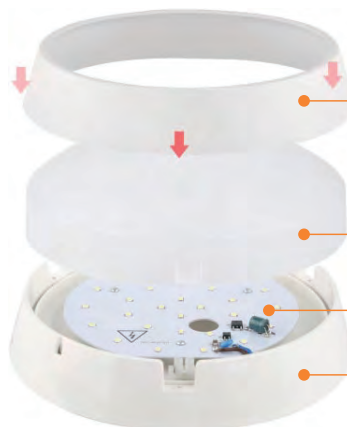
Emergency



NON-DIM

B74380 - DRUM CIRCULAR

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 ØxH	 LIFE
8W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	Golden/Silver/White/Black	200x83mm	50,000H
15W	120/230V	1400Lm	120°	3000/4000/6500K	>80	A+	Golden/Silver/White/Black	285x85mm	50,000H



High impact plastic, Durable.

PC diffuser, distributor even light.










Branded LED chip, high brightness.

Strong base, white and black color for option.



NON-DIM

B74390 - CIRCULAR

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 ØxH	 LIFE
15W	120/230V	1500Lm	120°	3000/4000/6500K	>80	A+	Golden/Silver/White/Black	290x95mm	50,000H

Bulkhead


PLASTIC WITH SENSOR

LED Bulkhead

New Design

Easy DIY Installation

Matt PC Cover Delivers **Comfortable** Light



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



LxWxH



LIFE


1 B74323 - PC+PC

8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	155x52mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	155x52mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x52mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	175x52mm	25,000H
20W	120/230V	1600Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x52mm	25,000H
22W	120/230V	1760Lm	120°	3000/4000/6500K	>80	A+	White/Black	210x52mm	25,000H

2 B74328 - PC+PC

8W	120/230V	640Lm	120°	3000/4000/6500K	>80	A+	White/Black	160x89x46mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	198x98x46mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	198x98x46mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	230x103x46mm	25,000H
20W	120/230V	1600Lm	120°	3000/4000/6500K	>80	A+	White/Black	230x103x46mm	25,000H

Bulkhead METAL IP54

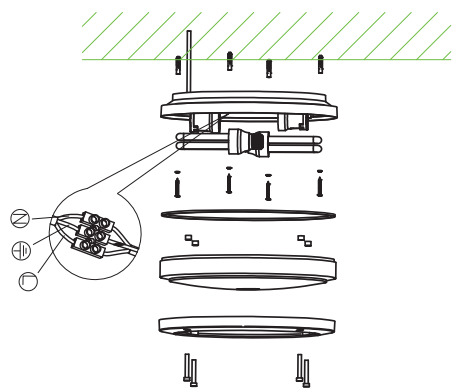

Colors for Option



1 LED



2 Non LED With E27 Base



VOLT



LUMENS



BEAM



CCT



Ra



EEL



FINISH



IP GRADE



ØxH



LIFE

1 B74501 - LED

12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black/Grey/Dark Grey	IP54	300x100mm	25,000H
-----	----------	-------	------	-----------------	-----	----	----------------------------	------	-----------	---------



2 B74502 - NON LED WITH E27 BASE

2x18W	120/230V	/	120°	3000/4000/6500K	>80	A+	White/Black/Grey/Dark Grey	IP54	220x80mm	25,000H
2x18W	120/230V	/	120°	3000/4000/6500K	>80	A+	White/Black/Grey/Dark Grey	IP54	275x86mm	25,000H
2x18W	120/230V	/	120°	3000/4000/6500K	>80	A+	White/Black/Grey/Dark Grey	IP54	300x100mm	25,000H











Bulkhead METAL IP54

**Die casting
Alu.+ Opal PC
Diffuser**




This elegant ceiling lamp is perfect for laundry, garage, basement or storage room. It is also ideal for your kitchen, bathroom, office, dressing room, kitchen and many places where you need brighter overhead lights.



B74503 - NON LED WITH E27 BASE




										
VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	IP GRADE	LxWxH	LIFE	
2x18W	120/230V	/	120°	3000/4000/6500K	>80	A+	White/Black/Grey/Dark Grey	IP54	300x300x100mm	25,000H

Bulkhead METAL IP54



- Easy assembly
- No buzzing sound
- Even beam pattern
- High colour fidelity










B74504 - NON LED WITH E27 BASE

	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 EEL	 FINISH	 IP GRADE	 LxWxH	 LIFE
2x18W	120/230V	/	120°	3000/4000/6500K	>80	A+	White/Black/Grey/Dark Grey	IP54	217x133x66mm	25,000H
2x18W	120/230V	/	120°	3000/4000/6500K	>80	A+	White/Black/Grey/Dark Grey	IP54	280x185x95mm	25,000H

Bulkhead METAL IP65












B74305 - ALU.+GLASS

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
5W	120/230V	400Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x98mm	25,000H
7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x98mm	25,000H
10W	120/230V	800Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x98mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x98mm	25,000H
15W	120/230V	1200Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x98mm	25,000H
18W	120/230V	1440Lm	120°	3000/4000/6500K	>80	A+	White/Black	192x188x98mm	25,000H



B74355 - ALU.+GLASS

									
	VOLT	LUMENS	BEAM	CCT	Ra	EEL	FINISH	LxWxH	LIFE
5W	120/230V	400Lm	120°	3000/4000/6500K	>80	A+	White/Black	212x118x90mm	25,000H
7W	120/230V	560Lm	120°	3000/4000/6500K	>80	A+	White/Black	212x118x90mm	25,000H
9W	120/230V	720Lm	120°	3000/4000/6500K	>80	A+	White/Black	212x118x90mm	25,000H
12W	120/230V	960Lm	120°	3000/4000/6500K	>80	A+	White/Black	212x118x90mm	25,000H

Bulkhead

UNEQUIPPED FIXTURE

Traditional Bulkhead Fixtures
With E27 Socket
Available in Material:
Alu. + Glass / PC + Glass / PC + PC



B74390



IP



FINISH



LxWxH

Max60W	65	White/Gray/Black	185x185x100mm
Max100W	65	White/Gray/Black	250x250x105mm



B74395



IP



FINISH




LxWxH

Max60W	65	White/Gray/Black	210x106x78mm
Max100W	65	White/Gray/Black	275x157x105mm

ROOMLUX® Outdoor & Industrial
my light. my choice

WALL LIGHT · SECURITY



MODERN WALL LIGHT | SECURITY

ROOMLUX® wall light, modern design, not only send a beam of light from both the top and bottom of its tube shape to highlight the exterior of your home, but also adds a soft warm glow and visual appeal to your living space, creating a cozy ambience.



Wall Light MODERN



1xGU10
Excluded



1

Colors for Option

☐ Matt White

☐ Matt Black

☐ Dark Grey

☐ Silver Grey

2xGU10
Excluded



2



VOLT



CAP



MATERIAL



FINISH



IP GRADE



LxWxH



WARRANTY

1 B72701

Max 1x35W

120/230V

GU10

Al Die-Casting+GLASS

White/Black/Grey

IP54

92x68x80mm

3Years

2 B72702

Max 2x35W

120/230V

GU10

Al Die-Casting+GLASS

White/Black/Grey

IP54

92x68x105mm

3Years

Wall Light MODERN



1xGU10
Excluded




1

2xGU10
Excluded



2

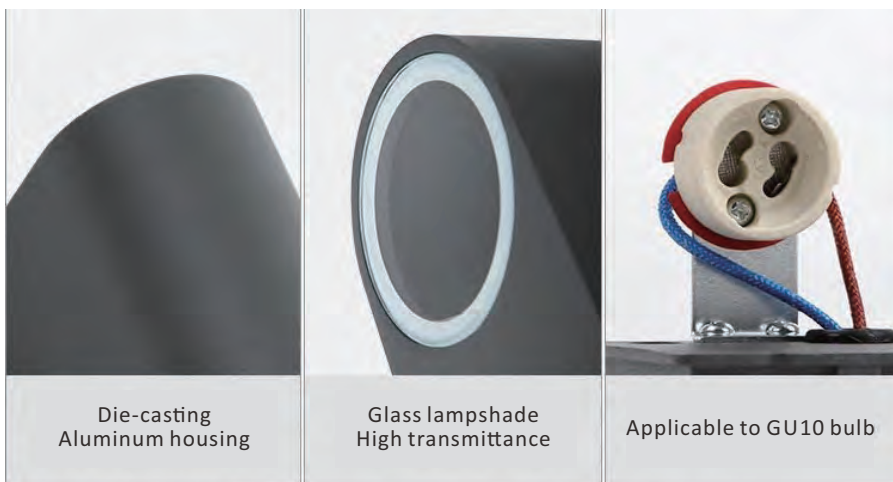

Die-casting
Aluminum housing

Glass lampshade
High transmittance

Applicable to GU10 bulb

Colors for Option



VOLT



CAP



MATERIAL



FINISH



IP GRADE



LxWxH



WARRANTY

1 B72703

Max 1x35W	120/230V	GU10	Al Die-Casting+GLASS	White/Black/Grey	IP54	92x68x80mm	3Years
-----------	----------	------	----------------------	------------------	------	------------	--------

2 B72704

Max 2x35W	120/230V	GU10	Al Die-Casting+GLASS	White/Black/Grey	IP54	92x68x150mm	3Years
-----------	----------	------	----------------------	------------------	------	-------------	--------

Wall Light MODERN

1xGU10 Lamp Excluded




- Outperforms 18W LED
- IP54 weather resistant
- Performs well at low t
- 2pcs set & 3pcs set half your inventory

B72705

 VOLT	 CAP	 MATERIAL	 FINISH	 IP GRADE	 ØxH	 WARRANTY	
Max 1X35W	120/230V	GU10	SS+Glass/Alu.+Glass	SS/Copper/Black/White/Silver	IP44	60x103mm	2Years

2xGU10 Lamp Excluded

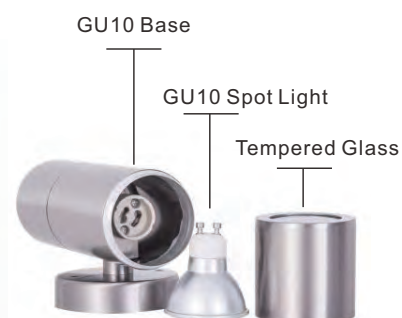

B72706

 VOLT	 CAP	 MATERIAL	 FINISH	 IP GRADE	 ØxH	 WARRANTY	
Max 2X35W	120/230V	GU10	SS+Glass/Alu.+Glass	SS/Copper/Black/White/Silver	IP44	60x160mm	2Years


Wall Light SENSOR



1




2

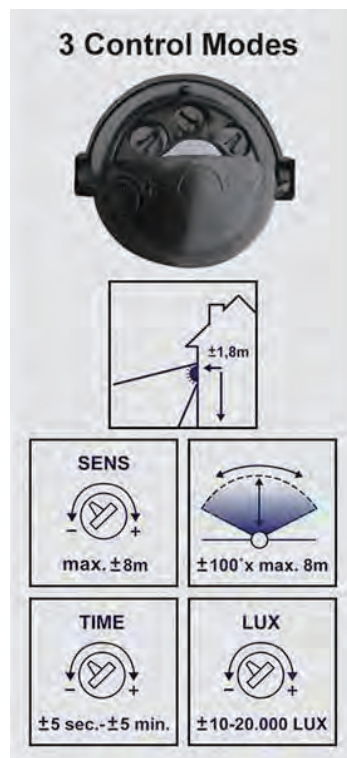

MORE DETAIL

PIR MOTION SENSOR LED WALL LIGHT

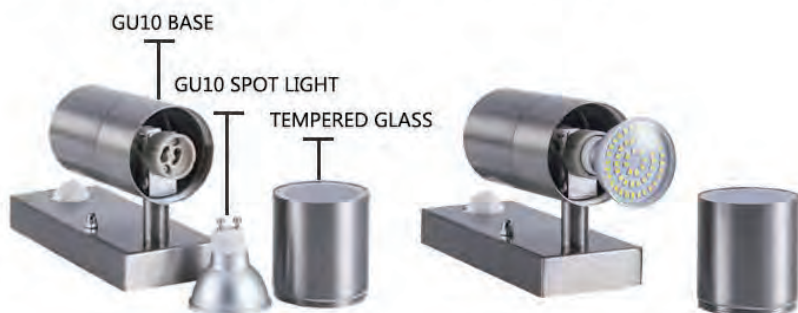

VOLT



CAP



MATERIAL



FINISH



IP GRADE



ØxH



WARRANTY

1 B72707

Max 1x35W

120/230V

GU10

SS+Glass/Alu.+Glass

SS/Copper/Black/White/Silver

IP44

60x103mm

2Years

2 B72708

Max 2x35W

120/230V

GU10

SS+Glass/Alu.+Glass

SS/Copper/Black/White/Silver

IP44

60x160mm

2Years

Security Light BASIC



Super Brightness

Saving 80% off electricity
bill fees compared to Halogen Bulb



B72502

									
VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE	
10W	120/230V	500Lm	120°	Non-isolated	3000/4000/6500K	0.9	White	218x219x180mm	25,000H












- Sensor distance: 4-8M
- Sensor detect angel: 100° (max)
- Sensor delay time: 10-60s (adjustable)
- Can install on wall or ceiling




B72503



									
VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	LxWxH	LIFE	
12W	120/230V	500Lm	120°	Non-isolated	3000/4000/6500K	0.9	White	191x229x210mm	25,000H

Security Light BASIC

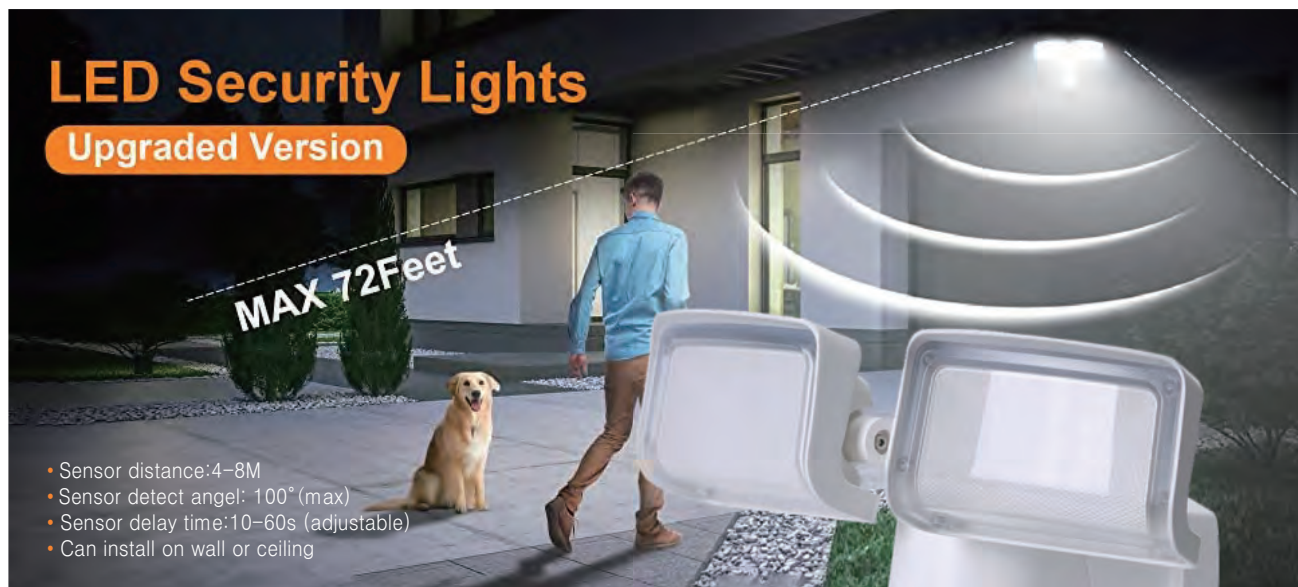

NOT Solar Powered





High Sensitive



Energy Saving



Super Bright

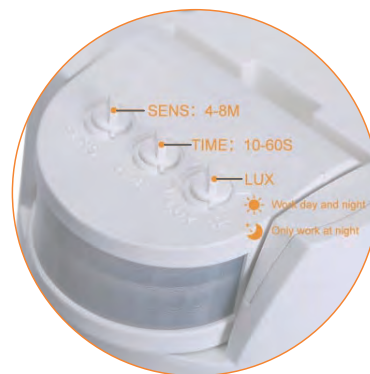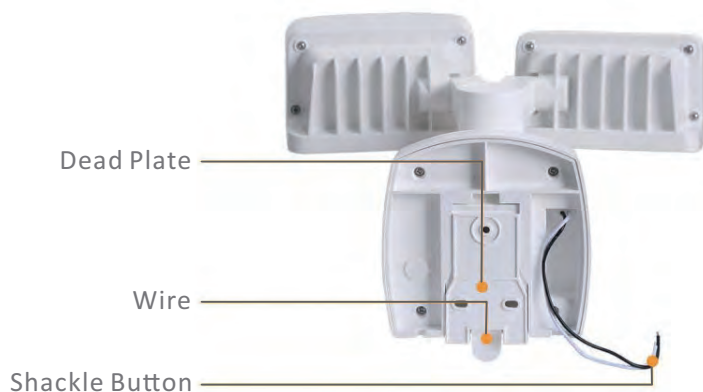

B72501



IP44



A+



Ra>80




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



LxWxH



LIFE

30W

120/230V

2000Lm

120°

Non-isolated

3000/4000/6500K

0.9

White

263x238x172mm

25,000H

ROOMLUX[®] Outdoor & Industrial
my light. my choice

LANDSCAPE



WALL WASHER · LINEAR · STEP · INGROUND · SPIKE ·
UNDERWATER · BOLLARD · POST

ROOMLUX's garden light is a relationship-based company that creates high-quality, innovative and environmentally sensitive landscape lighting products designed to improve the lives of our partners and enrich their capacity to realize desired futures and personal life. We support a commitment to family and personal life.



Landscape WALL WASHER



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



LxWxH



LIFE


1 B50501

12W	DC24V	792Lm	60°	3000/4000/6500K	>80	Alu. Alloy	Silver Grey	IP67	1000x21x63mm	50,000H
-----	-------	-------	-----	-----------------	-----	------------	-------------	------	--------------	---------

2 B50510

18W	DC24V	1188Lm	15°/30°	3000/4000/6500K	>80	Alu. Alloy+stainless steel	Black	IP67	1000x41x65mm	50,000H
24W	DC24V	1584Lm	15°/30°	3000/4000/6500K	>80	Alu. Alloy+stainless steel	Black	IP67	1000x41x65mm	50,000H

Landscape LINEAR LIGHT

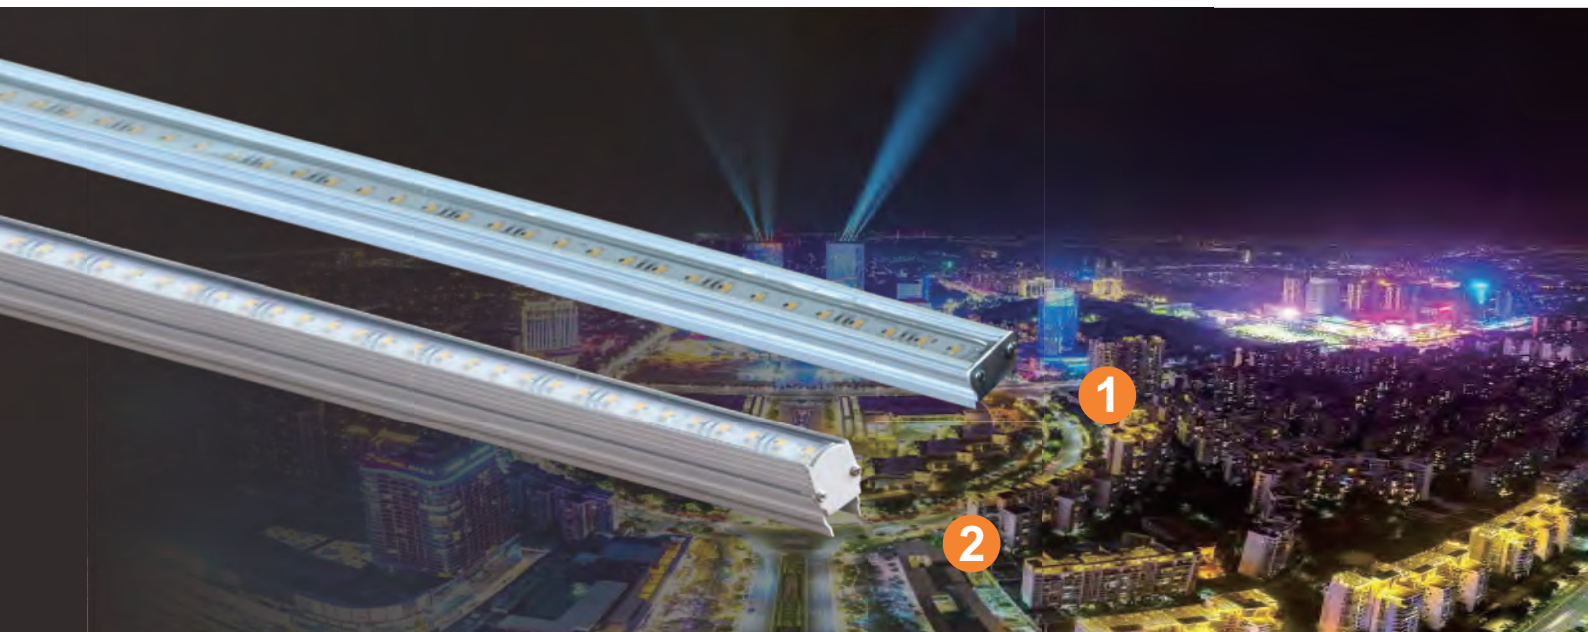

- Integrated waterproof technology, IP67
- Temperature resistance -40°C--55°C
- UV resistance CLASS 4 ; fire-retardant grade V-0
- Low voltage 24V for safety
- Professional lighting technical team support



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



LxWxH



LIFE

1 B50520

12W	DC24V	480Lm	120°	3000/4000/6500K	>80	Alu. Alloy	Silver Grey	IP67	1000x19x27mm	50,000H
-----	-------	-------	------	-----------------	-----	------------	-------------	------	--------------	---------

2 B50522

12W	DC24V	480Lm	120°	3000/4000/6500K	>80	Alu. Alloy	Silver Grey	IP67	1000x21x32mm	50,000H
12W	DC24V	480Lm	120°	RGB	>80	Alu. Alloy	Silver Grey	IP67	1000x19x27mm	50,000H

Landscape STEP LIGHT



Durable Die-casted Alu. Body

Frosted Glass Lens











Easy Installation



Accessories




B50400







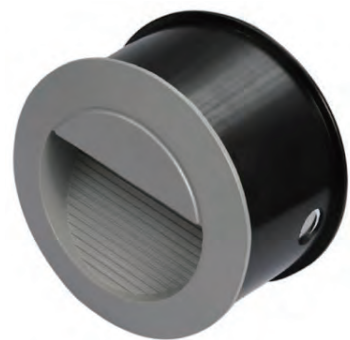



										
	VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	ØxH	LIFE
2W	120/230V	160Lm	40°	3000/4000/6500K	75	Alu.+PC	Black	IP54	104x50	30,000H

PRODUCT FEATURE:



- Made of die-casted aluminum, waterproof and resistant to corrosion.
- The 30,000hrs life-span reduces frequent replacement and maintenance.
- The frosted glass lens softens the light
- Energy Saving with high-quality LED chips



B50401

										
	VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	ØxH	LIFE
1.4W	120/230V	112Lm	40°	3000/4000/6500K	75	Alu.+PC	Silver Grey	IP65	126x66	30,000H

Landscape STEP LIGHT

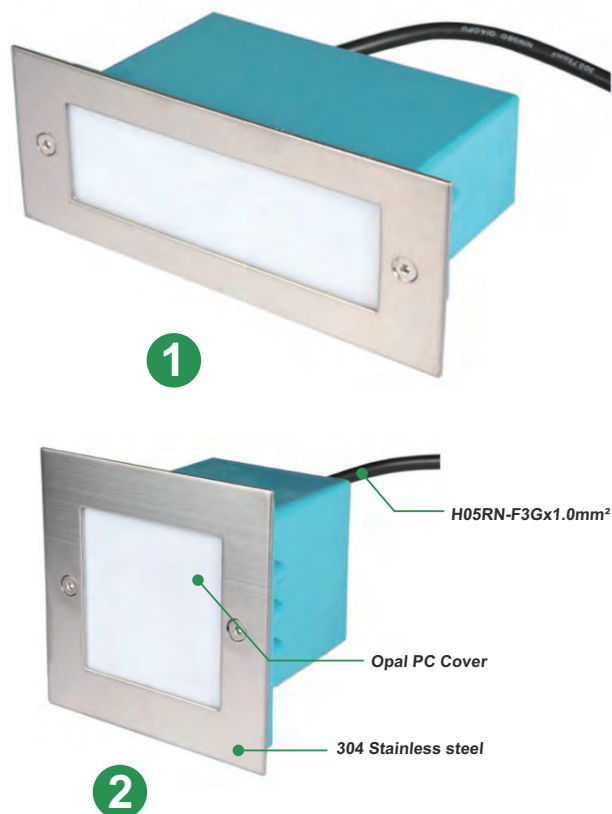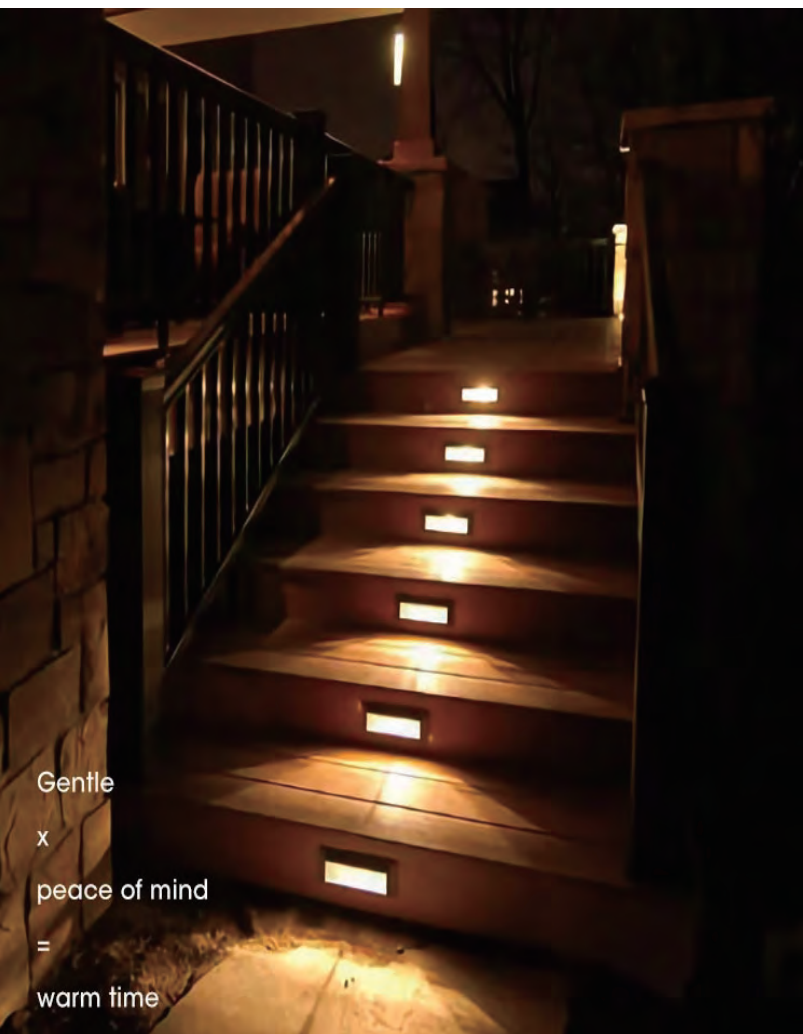

APPLICATION:

Walkways, front steps, back decks, porches, patios, etc.



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



LxWxH



LIFE

1 B50402


1.2W	120/230V	96Lm	80°	3000/4000/6500K	75	304SS+PC	Silver white	IP54	111x44x56mm	30,000H
------	----------	------	-----	-----------------	----	----------	--------------	------	-------------	---------

2 B50403


1.6W	120/230V	128Lm	80°	3000/4000/6500K	75	304SS+PC	Silver white	IP54	105x105x83mm	30,000H
------	----------	-------	-----	-----------------	----	----------	--------------	------	--------------	---------

Landscape

INGROUND LIGHT

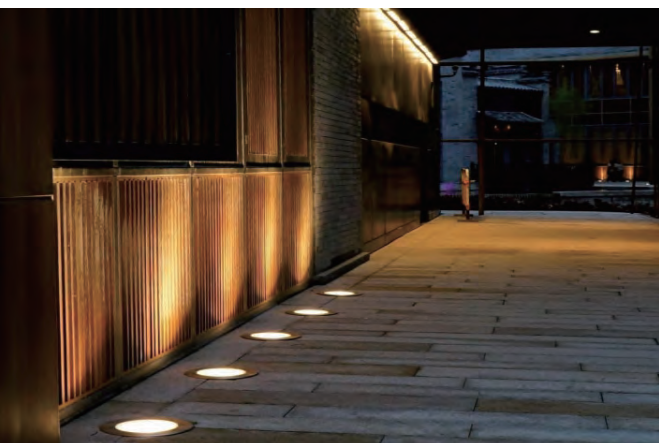



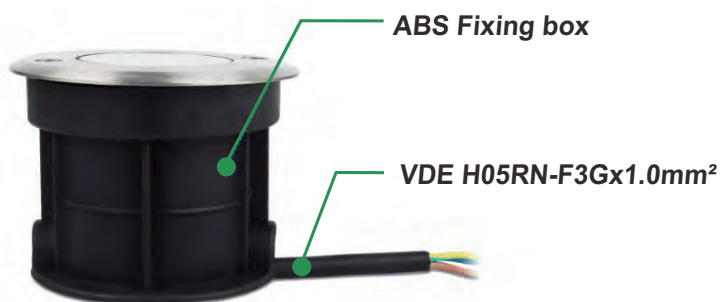







IP67 Waterproof




- High-pressure casting aluminium housing
- tempered glass, thickness 8-12mm
- copper plating nickel Waterproof joint
- Imported silica gel to all sealing element
- High quality light source and driver

B50700


	 VOLT	 LUMENS	 BEAM	 CCT	 Ra	 MATERIAL	 FINISH	 IP GRADE	 ØxH	 LIFE
6W	120/230V	360Lm	15°~120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	100x130mm	50,000H
12W	120/230V	720Lm	15°~120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	130x130mm	50,000H
18W	120/230V	1080Lm	15°~120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	160x140mm	50,000H
24W	120/230V	1440Lm	15°~120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	180x145mm	50,000H
36W	120/230V	2160Lm	15°~120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	210x130mm	50,000H
48W	120/230V	2880Lm	15°~120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	260x155mm	50,000H

Landscape

INGROUND LIGHT

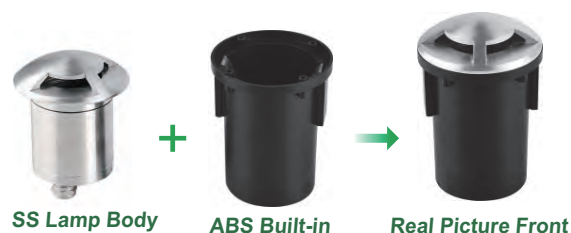

50cm VDE H05RN-F3G*1.0mm²

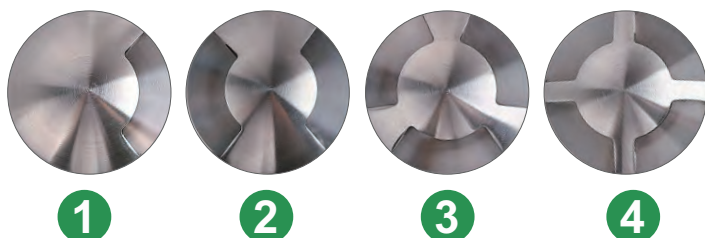

VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



ØxH



LIFE

1 B50720 - ONE SIDE GLOW

1W	120/230V	60Lm	30°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	52x90mm	50,000H
----	----------	------	-----	-----------------	-----	---------------------	--------------	------	---------	---------

2 B50721 - TWO SIDE GLOW

1W	120/230V	60Lm	30°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	52x90mm	50,000H
----	----------	------	-----	-----------------	-----	---------------------	--------------	------	---------	---------

3 B50722 - THREE SIDE GLOW

1W	120/230V	60Lm	30°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	52x90mm	50,000H
----	----------	------	-----	-----------------	-----	---------------------	--------------	------	---------	---------

4 B50723 - ONE SIDE GLOW

1W	120/230V	60Lm	30°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	52x90mm	50,000H
----	----------	------	-----	-----------------	-----	---------------------	--------------	------	---------	---------

Landscape

INGROUND LIGHT













Product Feature:

- Protect Grade: IP67 Body Material: 304SS + stalinite + ABS
- Save more than 90% energy than Halogen Lamp.
- Green lighting, Eco-friendly, no UV or IR radiation in the beam
- Anti-shock, anti-moisture, no RF interference, no buzzing noise.

Applications:

square, plaza, garden, lawn, playground, architecture, arts work, street, exhibition, etc.

B50729

										
	VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	ØxH	LIFE
1W	120/230V	60Lm	30°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	42x73mm	50,000H
1W	120/230V	60Lm	30°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	52x80mm	50,000H
1W	120/230V	60Lm	30°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP67	62x90mm	50,000H

Three Size Available:



Size: Φ62xH90mm



Size: Φ52xH80mm




Size: Φ42xH73mm



50cm VDE H05RN-F3G*1.0mm²

Landscape

INGROUND LIGHT

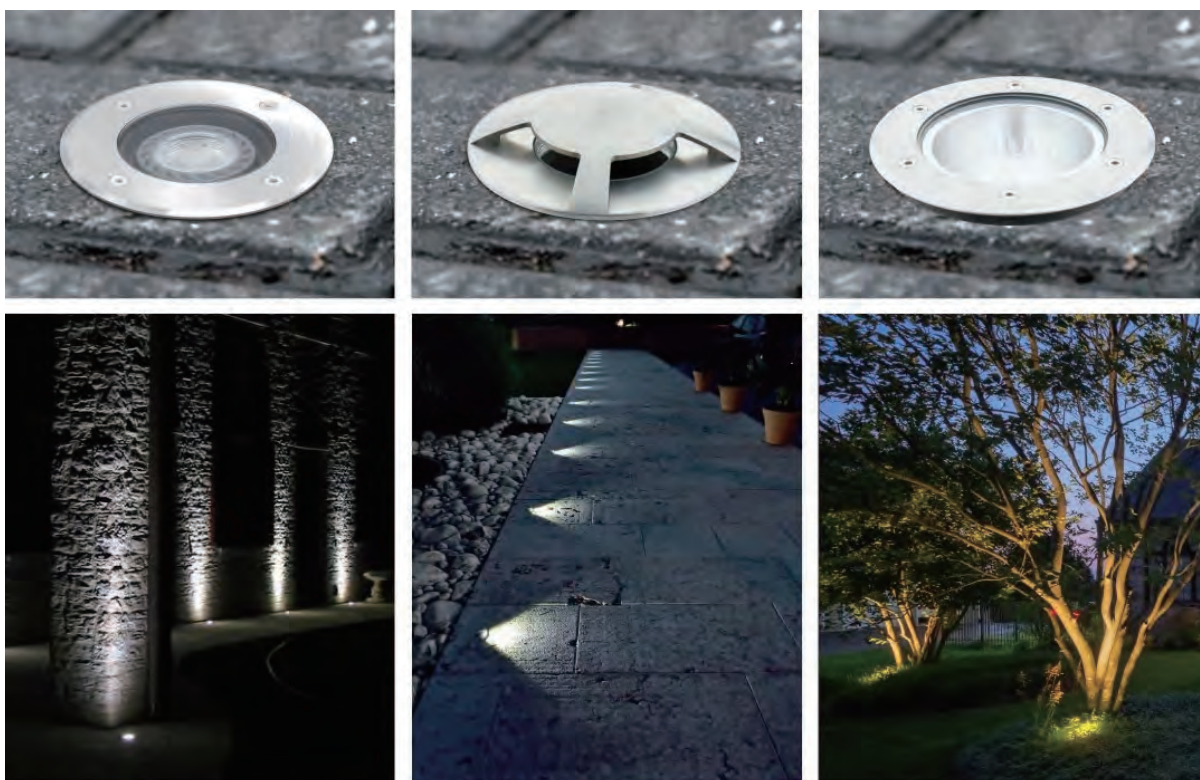











Material:

Stainless steel cover / Die-cast aluminum / Plastic



B50725

										
VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	ØxH	LIFE	
Max 60W	120/230V	180Lm	120°	3000/4000/6500K	>80	SS+Alu.+ABS	Silver White	IP65	110x120mm	50,000H

Landscape SPIKE LIGHT



1

Cap for Option
to Focus Light



2



• 3x0.75m² VDE 30CM Cable



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



ØxH



LIFE

1 B50302

9W	120/230V	900Lm	15°/30°/45°	3000/4000/6500K	80	Alu.+Glass	Black	IP65	95x85x115mm	30,000H
----	----------	-------	-------------	-----------------	----	------------	-------	------	-------------	---------

2 B50303 With Cap

6W	120/230V	600Lm	15°/30°/45°	3000/4000/6500K	80	Alu.+Glass	Black	IP65	75x84x90mm	30,000H
----	----------	-------	-------------	-----------------	----	------------	-------	------	------------	---------



B50305



IP65



Ra>80



30,000H



VOLT



LUMENS



BEAM



CCT



MATERIAL




FINISH



ØxH

9W	120/230V	810Lm	15°/30°/45°	3000/4000/6500K	Alu.+Glass	Black	85x145x105mm
----	----------	-------	-------------	-----------------	------------	-------	--------------

Landscape SPIKE LIGHT

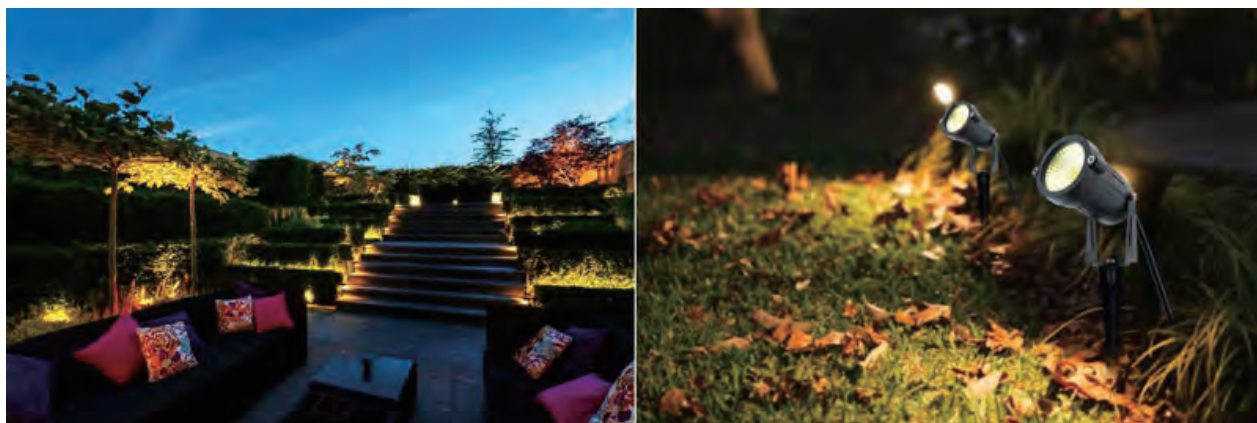

B50306

1 Set with 4pcs, 6pcs, 8pcs for option



Product Feature:

- AC/DC 12V/24 low working voltage
- VDE listed outgoing line, H05RN-F2G*1.0mm², 1m each light
- Die-cast aluminum, waterproof and resistant to corrosion
- Don't need screws, just stick the stake into the light base
- The 30,000hrs long lifespan reduces frequent replacement and maintenance.

Application :

park greening, lawn, square, courtyard, flower bed etc.



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



ØxH













LIFE

IW	AC/DC 12V/24V	450Lm	15°/30°/45°/60°	3000/4000/6500K	80	Alu.+Glass	Black	IP65	85x145x105mm	30,000H
----	---------------	-------	-----------------	-----------------	----	------------	-------	------	--------------	---------

Landscape SPIKE LIGHT



B50300


										
VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	ØxH	LIFE	
3W	AC/DC12V/24V	255Lm	15°/30°/45°	3000/4000/6500K	75	Alu. +Glass	Black	IP65	98x286	30,000H

Product Feature:







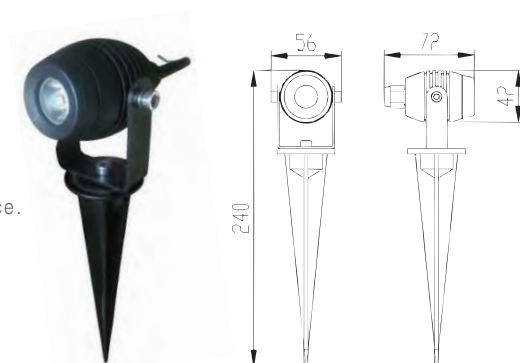



- 12V24V AC/DC low working voltage
- VDE listed outgoing line, H05RN-F2G*1.0mm²
- Die-cast aluminum, waterproof and resistant to corrosion
- Don't need screws, just stick the stake into the light base
- The 30,000hrs long lifespan reduces frequent replacement and maintenance.

Application :

park greening, lawn, square, courtyard, flower bed etc.



B50301

										
VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	ØxH	LIFE	
1W	AC/DC12V/24V	90Lm	15°/30°/45°	3000/4000/6500K	75	Alu.+Glass	Black	IP65	56x240mm	30,000H

Landscape

UNDERWATER LIGHT



1



2

Product Feature:

- Copper plating nickel Waterproof joint
- 50cm VDE outgoing line, H05RN-F2Gx1.0mm²
- Imported silica gel to all sealing element
- All lamp bodies are tested for water resistance
- High quality light source and driver

Application:

Swimming pool, waterfall, fountain underwater etc.



Tempered Glass



ABS Built-in



SS Lamp Body



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



ØxH



LIFE

1 B50600

3W	120/230V	180Lm	120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP68	85x75mm	50,000H
9W	120/230V	180Lm	120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP68	145x85mm	50,000H

2 B50610


3W	120/230V	180Lm	120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP68	100x75mm	50,000H
9W	120/230V	180Lm	120°	3000/4000/6500K	>80	304SS+Stalinite+ABS	Silver White	IP68	150x110mm	50,000H

Landscape


BOLLARD LIGHT



E27 Replaceable Lawn Light




Silver



Copper



Black



White

Product Feature:

- Protection degree: IP 44
- Require a 1 x 60 W max E27 lamp (Not Included)
- Die-casting aluminum body, resistant to corrosion

Application:

driveway, pathway, park, yard, patio, flowerbeds, etc.

B50107



VOLT



CAP



MATERIAL



FINISH



IP GRADE



LxWxH



WARRANTY

Max 60W

220-240V

E27

SS+Glass

Black/Silver/Copper/White

IP44


170x170x500mm

3Years


Landscape

BOLLARD LIGHT

E27 Replaceable Lawn Light



Silver




Copper



Black



White

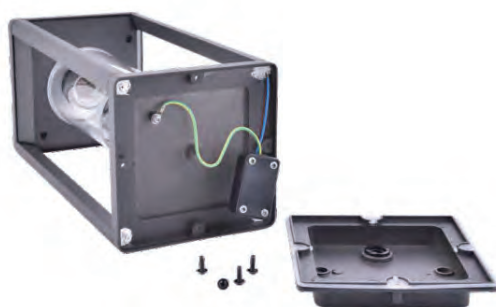

Product Feature:

- Protection degree: IP 44
- Require a 1 x 60 W max E27 lamp (Not Included)
- Die-casting aluminum body, resistant to corrosion

Application:

driveway, pathway, park, yard, patio, flowerbeds, etc.

B50108



VOLT



CAP



MATERIAL



FINISH



IP GRADE



LxWxH



WARRANTY

Max 60W

220-240V

E27

Alu. +PC


Silver/Black/White/Copper For Option

IP54

150x100x500mm

3Years

Landscape BOLLARD LIGHT

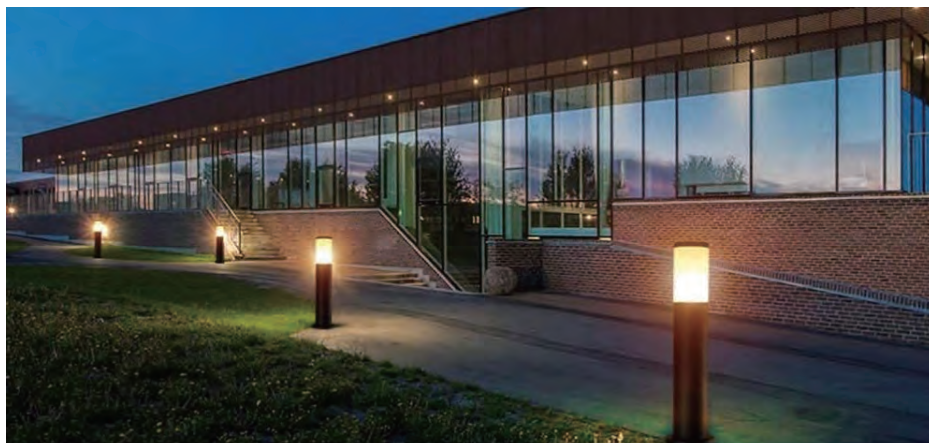

B50105

 VOLT	 CAP	 MATERIAL	 FINISH	 IP GRADE	 ØxH	 WARRANTY	
Max 60W	120/230V	E27	Alu.+PC	Black	IP44	140x600mm	3Years




Detail A



Detail B



Detail C



Detail D

Product Feature:

- Protection degree: IP 44
- Require a 1 x 60 W max E27 lamp (Not Included)
- Die-casting aluminum body, resistant to corrosion

Application:

driveway, pathway, park, yard, patio, flowerbeds, etc.

B50106

 VOLT	 CAP	 MATERIAL	 FINISH	 IP GRADE	 ØxH	 WARRANTY	
Max 60W	120/230V	E27	Alu.+PC	Black	IP44	140x600mm	3Years

Landscape POST LIGHT



Product Feature:

- The hanging lantern brings charm and decor to any outdoor area.
- This fixture is adjustable in height for your desired location.
- This fixture uses one energy saving bulb(E27 lamp socket) that is not included.

Application :

Garden, Stree, Curtilage, Square, Uptown, Parking Lot and etc.



VOLT



CAP



MATERIAL



FINISH



IP GRADE



ØxH



WARRANTY

1 B50205

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x360mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

2 B50206

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x990mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

Landscape POST LIGHT



VOLT



CAP



MATERIAL



FINISH



IP GRADE



ØxH



WARRANTY

1 B50207

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x295mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

2 B50208

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x295mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

3 B50209

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x295mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

4 B50210

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x360mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

5 B50211

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x360mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

6 B50212

Max 60W	120/230V	E27	Alu.+GLASS	Black	IP44	156x990mm	3Years
---------	----------	-----	------------	-------	------	-----------	--------

6

Landscape POST LIGHT










Product Feature:



- Require a 60/100W max E27 lamp (Not Included)
- Die-casting aluminum body, resistant to corrosion

Application:

perfect for garden, patio, terrace, veranda, porch, etc.

	 VOLT	 CAP	 MATERIAL	 FINISH	 IP GRADE	 ØxH	 WARRANTY
<div>1</div> <div>B50201</div>	Max 60W120/230V	E27	Alu.+GLASS	Black	IP44	195x357mm	3Years
<div>2</div> <div>B50202</div>	Max 100W120/230V	E27	Alu.+GLASS	Black	IP44	225x442mm	3Years
<div>3</div> <div>B50203</div>	Max 60W120/230V	E27	Alu.+GLASS	Black	IP44	147x382mm	3Years
<div>4</div> <div>B50204</div>	Max 100W120/230V	E27	Alu.+GLASS	Black	IP44	176x424mm	3Years

HIGH BAY

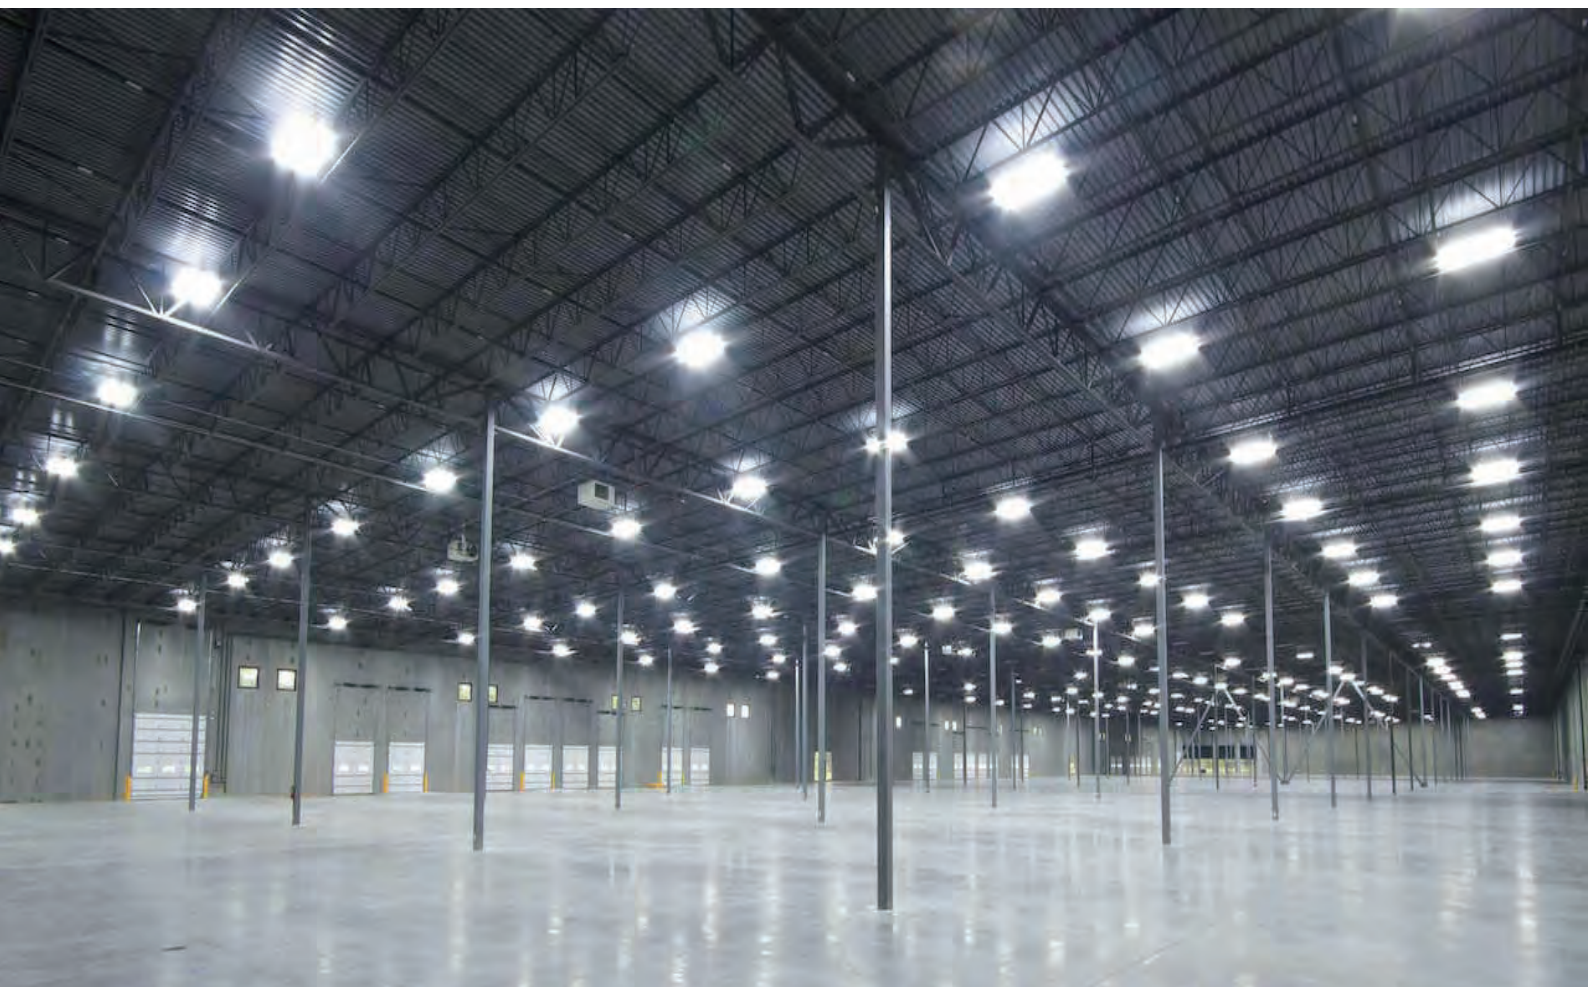


BASIC · UFO · LINEAR


ROOMLUX® Luminaires can be combined in groups across the layout, and re-zoning them does not require a hardware change, thus minimizing commissioning costs. The system delivers savings over and above the actual efficiency of the LEDs and is future-proof. In the PIR version products, when there has no movement detected after 15 minutes, the lighting will dimming down to 25% of the lumen output, which helps to maximum your energy saving in a simple way.



High Bay BASIC

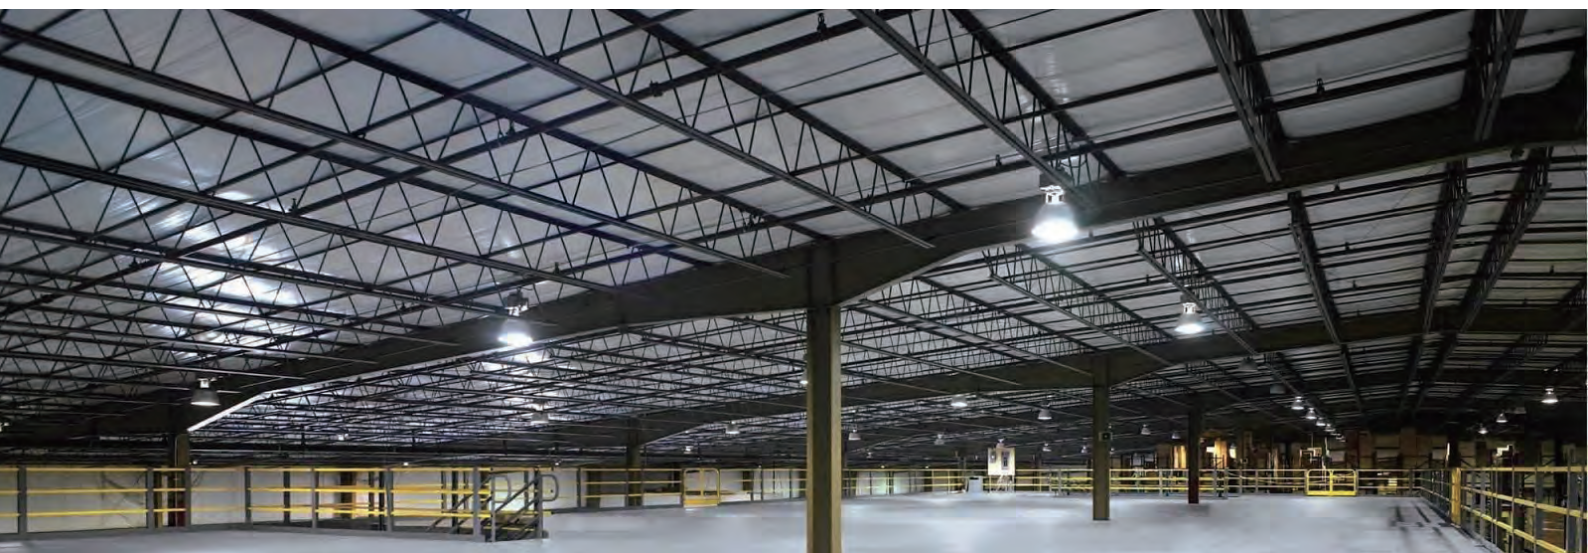

Innovative Inside fan
Separate Alu.
Heat **Dissipation**
Increase air flue, excellent dissipation

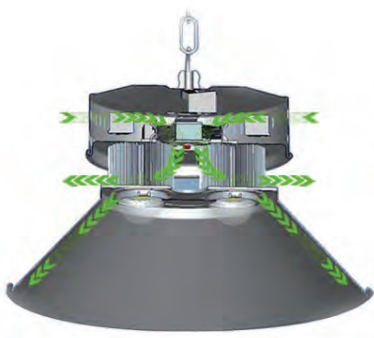

B60740 - 50~400W




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH




DxH



LIFE





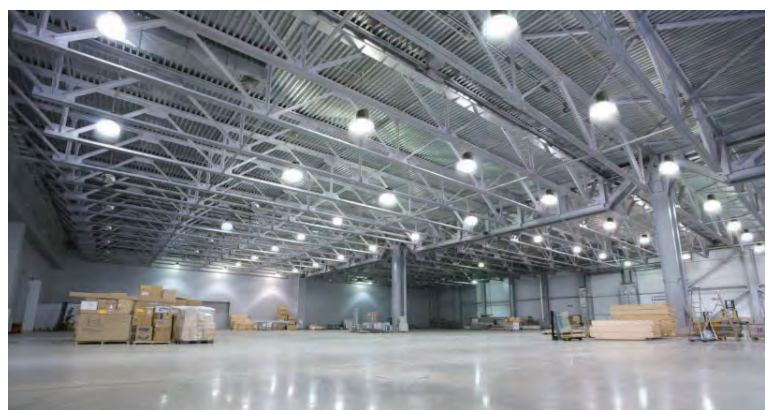




	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	DxH	LIFE
50W	120/230V	5000Lm	120°	Isolated	3000/4000/6500K	0.9	Silver	450x325mm	30,000H
100W	120/230V	10000Lm	120°	Isolated	3000/4000/6500K	0.9	Silver	450x325mm	30,000H
150W	120/230V	15000Lm	120°	Isolated	3000/4000/6500K	0.9	Silver	500x350mm	30,000H
200W	120/230V	20000Lm	120°	Isolated	3000/4000/6500K	0.9	Silver	500x350mm	30,000H
300W	120/230V	30000Lm	120°	Isolated	3000/4000/6500K	0.9	Silver	570x385mm	30,000H
400W	120/230V	40000Lm	120°	Isolated	3000/4000/6500K	0.9	Silver	570x385mm	30,000H

High Bay UFO



B60730 - 100~200W




									
VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	DxH	LIFE	
100W	120/230V	10000Lm	120°	Linear	3000/4000/6500K	0.9	Black	260x50mm	30,000H
150W	120/230V	15000Lm	120°	Linear	3000/4000/6500K	0.9	Black	310x50mm	30,000H
200W	120/230V	20000Lm	120°	Linear	3000/4000/6500K	0.9	Black	360x52mm	30,000H

ROOMLUX®

Outdoor & Industrial
my light. my choice

High Bay UFO

- SMD2835 high brightness chip
- Compact structure and lightweight design
- Air convection heat dissipation

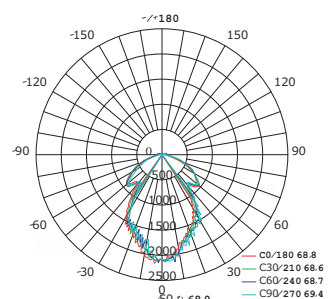


B60718 - 100~200W

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	DxH	LIFE
100W	130/230V	9000Lm	120°	Linear	3000/4000/6500K	0.9	Black	280x95mm	30,000H
150W	130/230V	13500Lm	120°	Linear	3000/4000/6500K	0.9	Black	340x97mm	30,000H
200W	130/230V	18000Lm	120°	Linear	3000/4000/6500K	0.9	Black	400x100mm	30,000H



- Meanwell driver
- Aviation aluminum
- Specialized air convection design for best heat dissipation
- Bridgelux chips

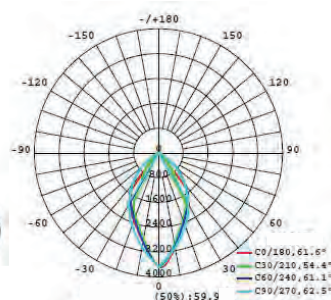

B60716 - 100~200W

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	DxH	LIFE
100W	100-265V	10000Lm	120°	Isolated	3000/4000/6500K	0.9	Black	310x175mm	30,000H
150W	100-265V	15000Lm	120°	Isolated	3000/4000/6500K	0.9	Black	360x180mm	30,000H
200W	100-265V	20000Lm	120°	Isolated	3000/4000/6500K	0.9	Black	410x185mm	30,000H

High Bay UFO



Unique Design for Industrial
PC Diffuser, Flicker Free
120LM/W
Alu. Housing, Durable Performance



Additional
Reflector for Option
90°/120° Beam Angle

B60732 - 100~200W



IP44



A



Ra>80



EARTH




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



DxH




LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	DxH	LIFE
100W	100-265V	11000Lm	120°	Isolated	3000/4000/6500K	0.9	Black	212x101mm	30,000H
150W	100-265V	16500Lm	120°	Isolated	3000/4000/6500K	0.9	Black	245x102mm	30,000H
200W	100-265V	22000Lm	120°	Isolated	3000/4000/6500K	0.9	Black	271x107mm	30,000H

High Bay LINEAR

100-150Lm/W Linear Model

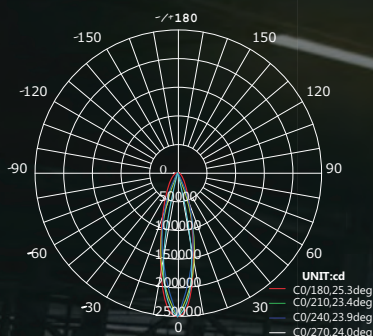

B60730 - 100~200W




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



FINISH



DxH




LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	FINISH	DxH	LIFE
70W	120/230V	10500Lm	120°	Linear	3000/4000/6500K	0.9	Black/Grey	476x131mm	30,000H
100W	120/230V	15000Lm	120°	Linear	3000/4000/6500K	0.9	Black/Grey	476x131mm	30,000H
150W	120/230V	22500Lm	120°	Linear	3000/4000/6500K	0.9	Black/Grey	924x131mm	30,000H
200W	120/230V	30000Lm	120°	Linear	3000/4000/6500K	0.9	Black/Grey	924x131mm	30,000H

ROOMLUX® Outdoor & Industrial
my light. my choice

EX PROOF



SQUARE · ROUND · LINEAR · STREET

Explosion proof lighting significantly reduces the risk of explosions by preventing the ignition of surrounding flammable gases and vapors. The average service life is up to 100,000 hours. Explosion proof grade is Ex d IIC T6 and the anti-corrosion grade can reach WF2. The line is offering round, square, tube shaped lamps.



ROOMLUX®

Outdoor & Industrial
my light. my choice

EX Proof SQUARE













Safe and Stable Excellent Performance

- > Cree LED Chip
- > Anticorrosion Grade WF2
- > Explosion Proof Grade Exd II CT6
- > Start-up Time Less Than 0.2S
- > Osram Driver for Five Years Warranty

ATEX  **RoHS**  

B73701

										
	VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	LxWxH	LIFE
30W	120/230V	3600Lm	90°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	300x186x137mm	50,000H
50W	120/230V	6000Lm	90°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	300x186x137mm	50,000H
60W	120/230V	7200Lm	90°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	300x186x137mm	50,000H
70W	120/230V	8400Lm	90°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	300x186x137mm	50,000H
80W	120/230V	9600Lm	90°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	300x186x137mm	50,000H

EX Proof ROUND








Ra >70

IP66

50,000H










B73705 - PC SHADE

							
	VOLT	LUMENS	BEAM	CCT	MATERIAL	FINISH	ØxH
40W	120/230V	4800Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x189mm
50W	120/230V	6000Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x189mm
60W	120/230V	7200Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x189mm
70W	120/230V	8400Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x189mm
80W	120/230V	9600Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x189mm










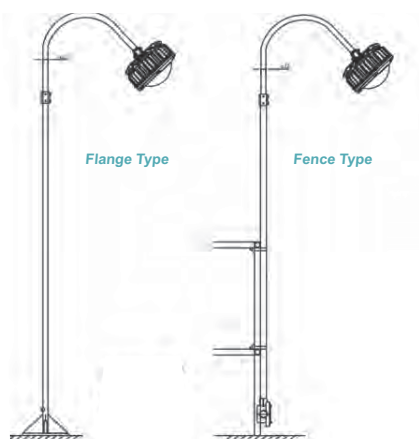
B73706 - SHORT GLASS

							
	VOLT	LUMENS	BEAM	CCT	MATERIAL	FINISH	ØxH
40W	120/230V	4800Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x294mm
50W	120/230V	6000Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x294mm
60W	120/230V	7200Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x294mm
70W	120/230V	8400Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x294mm
80W	120/230V	9600Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x294mm



B73707 - LONG GLASS

							
	VOLT	LUMENS	BEAM	CCT	MATERIAL	FINISH	ØxH
40W	120/230V	4800Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x218mm
50W	120/230V	6000Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x218mm
60W	120/230V	7200Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x218mm
70W	120/230V	8400Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x218mm
80W	120/230V	9600Lm	120°	3000/4000/6500K	Alu. Alloy	Silver Gey	225x218mm



Ceiling Type



Ceiling Type




Tube Hanging Type



Suction Type



Suction Type




Sitting Type


ROOMLUX®

Outdoor & Industrial
my light. my choice


EX Proof LINEAR




Single Tube Side View



Single Tube Top View



Double Tube Top View



Double Tube Side View

Application

suitable for dangerous places in zones 1 and 2, explosive gas environments of Class II A, II B and II C, mixing temperature of explosive gases: T1 ~T5, widely used in petroleum, chemical industry, military industry, mine, etc.

ATEX  **RoHS**  



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



LxWxH



LIFE

B73710

8W	120/230V	3600Lm	360°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	1280x123x146mm	50,000H
16W	120/230V	6000Lm	360°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	1280x123x146mm	50,000H

B73711

16W	120/230V	3600Lm	360°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	1280x202x146mm	50,000H
32W	120/230V	6000Lm	360°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	1280x202x146mm	50,000H


EX Proof LINEAR



**Opal PC Cover Toughed
Glass Cover For Option**



Glass Cover



PC Cover

Product Features

- > Products can work safely in various flammable and explosive places.
- > Cast aluminium alloy shell, surface spraying anti-static, corrosion-resistant, waterproof, dust-proof.
- > Transparent toughened glass protective cover, good light transmittance, high light flux.
- > Beautiful appearance, simple and reliable structure, easy installation.
- > Independent wiring cavity design makes wiring more convenient and fast.



VOLT



LUMENS



BEAM



CCT



Ra



MATERIAL



FINISH



IP GRADE



LxWxH



LIFE

① B73713

20W	120/230V	2200Lm	90°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	335x125x77mm	50,000H
30W	120/230V	3300Lm	90°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	335x125x77mm	50,000H


② B73715

40W	120/230V	4400Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	635x125x77mm	50,000H
50W	120/230V	5500Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	635x125x77mm	50,000H
60W	120/230V	6600Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	635x125x77mm	50,000H

③ B73716

80W	120/230V	8800Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	1143x125x77mm	50,000H
100W	120/230V	11000Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	1143x125x77mm	50,000H
120W	120/230V	12000Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Gey	IP66	1143x125x77mm	50,000H



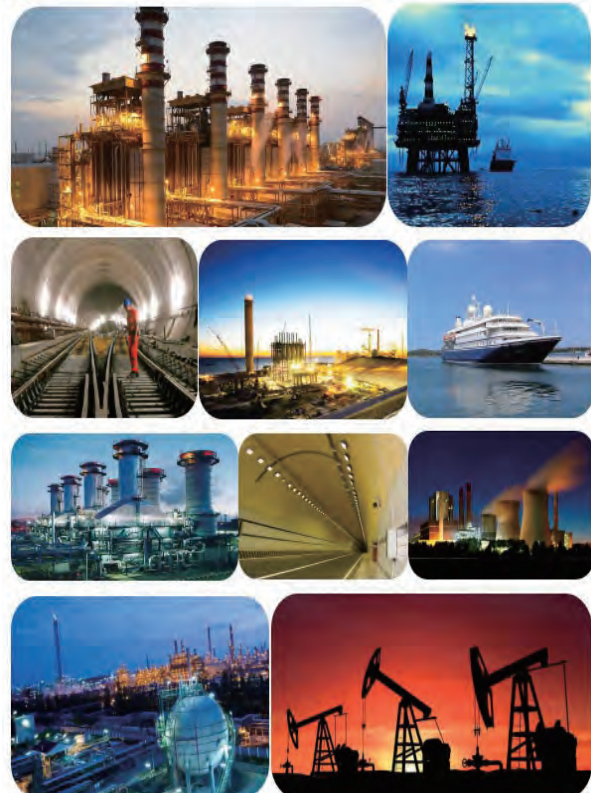







EX Proof STREET



Application scenario


This product has good explosion-proof function, suitable for various inflammable and explosive places, mainly used in railway, electric power, metallurgy, petroleum, petrochemical, chemical, steel, aviation, ship and each Efficient lighting in factories, stations, large facilities, venues and other places.

B73720

										
	VOLT	LUMENS	BEAM	CCT	Ra	MATERIAL	FINISH	IP GRADE	LxWxH	LIFE
100W	120/230V	12000Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Grey	IP66	567x276x74mm	50,000H
150W	120/230V	18000Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Grey	IP66	567x276x74mm	50,000H
200W	120/230V	24000Lm	120°	3000/4000/6500K	>70	Alu. Alloy	Silver Grey	IP66	567x276x74mm	50,000H

ROOMLUX® Outdoor & Industrial
my light. my choice

STREET LIGHT



DUSK TO DAWN · BASIC · SOLAR

The **ROOMLUX**® street luminaire is optimized for customers requiring a LED solution for local, collector and major roadways. GE's unique reflective optics are designed to optimize application efficiency, minimize glare, and 'shape' the light to where you want the light to go. The modern design incorporates the heat sink directly into the unit for heat transfer to prolong LED life.



Street Light

DUSK TO DAWN SECURITY LIGHT




Products Features:

- The light shell is die-casting of high quality aluminium alloy, clean and smooth. Electrostatic epoxy coating surface treatment provides quality anti-corrosion.
- Using a high temperature resistant(>200°C) silicon rubber sealing ring, this provides waterproof, anti-dust and anti-fooging.

Application:

- The township streets, squares, courtyards, plazas, etc.

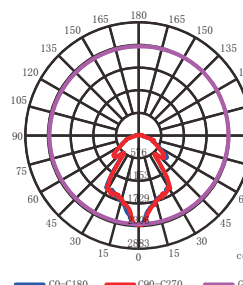

PHOTOCELL INCLUDED



IP65



A+











Ra>80



EARTH

B47700 - 30W 50W


	 VOLT	 LUMENS	 BEAM	 CCT	 PF	 FINISH	 LxWxH	 LIFE
30W	120/230V	3000Lm	120°	3000/4000/6500K	0.9	Grey	373x252x152mm	30,000H
50W	120/230V	5000Lm	120°	3000/4000/6500K	0.9	Grey	373x252x152mm	30,000H

Street Light

DUSK TO DAWN SECURITY LIGHT

Ideal for lighting dark, secured areas or any place where a large concentration of light is needed.

- Office Building
- Storage Sites
- Streets
- Parking Areas

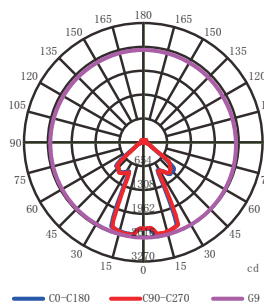


B47500 - 30W 50W











HIGH BRIGHTNESS LED
PS COVER



PHOTOCELL INCLUDED




	 VOLT	 LUMENS	 BEAM	 CCT	 PF	 FINISH	 WxH	 LIFE
30W	120/230V	3000Lm	60°	3000/4000/6500K	0.9	White/Black	306x460mm	30,000H
50W	120/230V	5000Lm	60°	3000/4000/6500K	0.9	White/Black	306x460mm	30,000H

DUSK TO DAWN SECURITY LIGHT



- The township streets, squares, courtyards, plazas, etc.

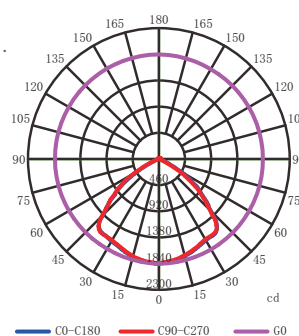

EARTH


115 09 2022

 www.roomlux.com
 sales@roomlux.com
 (86)-551-6522 6000

Street Light BASIC



ADC 12# Alu. Housing,
Excellent Heat Dissipation



High Efficiency LED,
Up to 120LM/W



Adjustable Lighting Angle,
Rotatable Direction

Two Options



1 Photocontrol for Option



2 Regular Model

B47776 - 100~250



IP65












A+



Ra>70



EARTH

	 VOLT	 LUMENS	 BEAM	 DRIVER	 CCT	 PF	 COVER	 LxWxH	 LIFE
100W	120/230V	10000Lm	70°x140°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	500x160x38mm	30,000H
150W	120/230V	15000Lm	70°x140°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	637x394x38mm	30,000H
200W	120/230V	20000Lm	70°x140°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	675x255x83mm	30,000H
250W	120/230V	25000Lm	70°x140°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	783x260x83mm	30,000H

Street Light BASIC



Adjustable Angle

After removing the lamp handle, rotate the angle of the lamp handle once to obtain a brand-new 90° product style.



High Quality Shell With High Technology
High quality shell extends service life.

Two Options

1 Glass Cover

High transmittance glass cover, IK08



2 PC Lens

Integrated PC cover, elegant and fashionable



Ideal for lighting dark, secured areas or any place.

- Office Building
- Storage Sites
- Streets
- Parking Areas

① B47773 - 50W~200W ② B47774 - 50W~200W




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



COVER




LxWxH



LIFE







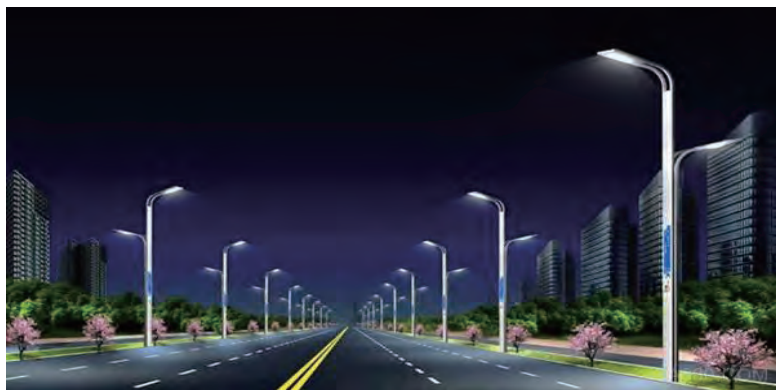


	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	COVER	LxWxH	LIFE
30W	120/230V	3000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	399x149x63mm	30,000H
45W	120/230V	4500Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	469x168x63mm	30,000H
60W	120/230V	6000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	469x168x63mm	30,000H
100W	120/230V	10000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	509x237x76mm	30,000H
120W	120/230V	12000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	509x237x76mm	30,000H
150W	120/230V	15000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	559x287x74mm	30,000H

Street Light BASIC



B47767 - 30W~200W



	 VOLT	 LUMENS	 BEAM	 DRIVER	 CCT	 PF	 COVER	 LxWxH	 LIFE
30W	100-265V	2700Lm	90°x120°	Non-isolated	3000/4000/6500K	0.9	Black/Gray	344x127x54mm	30,000H
50W	100-265V	4500Lm	90°x120°	Non-isolated	3000/4000/6500K	0.9	Black/Gray	404x164x55mm	30,000H
100W	100-265V	9000Lm	90°x120°	Non-isolated	3000/4000/6500K	0.9	Black/Gray	509x190x67mm	30,000H
150W	100-265V	13500Lm	90°x120°	Non-isolated	3000/4000/6500K	0.9	Black/Gray	625x220x75mm	30,000H
200W	100-265V	18000Lm	90°x120°	Non-isolated	3000/4000/6500K	0.9	Black/Gray	678x250x71mm	30,000H

Street Light BASIC



Surge protection

SPD>6KV



High efficiency

Brand Chip
100Lm/W



Irradiation angle


Large irradiation area
90°x120°












Products Features:

- ADC12# Alu. Die-casting of high quality aluminium alloy.
- High temperature resistant, perfect waterproof and anti-dust.
- Compacted size, beautiful appearance, operation and maintenance.

B47765 - 30W~200W



	 VOLT	 LUMENS	 BEAM	 DRIVER	 CCT	 PF	 COVER	 LxWxH	 LIFE
30W	120/230V	3000Lm	90°x120°	Linear	3000/4000/6500K	0.9	Gray	370x146x56mm	30,000H
50W	120/230V	5000Lm	90°x120°	Linear	3000/4000/6500K	0.9	Gray	435x163x55mm	30,000H
100W	120/230V	10000Lm	90°x120°	Linear	3000/4000/6500K	0.9	Gray	492x195x74mm	30,000H
150W	120/230V	15000Lm	90°x120°	Linear	3000/4000/6500K	0.9	Gray	572x210x76mm	30,000H
200W	120/230V	20000Lm	90°x120°	Linear	3000/4000/6500K	0.9	Gray	648x251x76mm	30,000H

Street Light BASIC











Products Features:

- Die-casting of high quality aluminium alloy.
- High temperature resistant(> 200°C) silicon rubber sealing ring, perfect waterproof and anti-dust.
- Compacted size, beautiful appearance, with convenient installation, operation and maintenance.

B47780 - 50W~200W




	 VOLT	 LUMENS	 BEAM	 CCT	 PF	 COVER	 LxWxH	 LIFE
50W	120/230V	5000Lm	120°	3000/4000/6500K	0.9	White/Black/Gray	475x200x60mm	30,000H
100W	120/230V	10000Lm	120°	3000/4000/6500K	0.9	White/Black/Gray	720x275x75mm	30,000H
150W	120/230V	15000Lm	120°	3000/4000/6500K	0.9	White/Black/Gray	860x335x70mm	30,000H
200W	120/230V	20000Lm	120°	3000/4000/6500K	0.9	White/Black/Gray	940x350x80mm	30,000H

Street Light PRO



Ideal for lighting dark, secured areas or any place where a large concentration of light is needed.

- Office Building
- Storage Sites
- Streets
- Parking Areas



Chips

High brightness LED chips
High Light efficiency



Housing

ADC#12 aluminum
High purity and density
Excellent heat dissipation



Professional outdoor paint

Anti-corrosion and anti-rusting

B47766 - 50W~200W




VOLT



LUMENS



BEAM



DRIVER



CCT



PF



COVER



LxWxH



LIFE

	VOLT	LUMENS	BEAM	DRIVER	CCT	PF	COVER	LxWxH	LIFE
50W	120/230V	5000Lm	90°x130°	Linear	3000/4000/6500K	0.9	Gray	109x169x52mm	30,000H
100W	120/230V	10000Lm	90°x130°	Linear	3000/4000/6500K	0.9	Gray	498x201x72mm	30,000H
150W	120/230V	15000Lm	90°x130°	Linear	3000/4000/6500K	0.9	Gray	571 x246x72mm	30,000H
200W	120/230V	20000Lm	90°x130°	Linear	3000/4000/6500K	0.9	Gray	633x283x72mm	30,000H


Street Light PRO










Ideal for lighting dark, secured areas or any place where a large concentration of light is needed.

- Office Building
- Storage Sites
- Streets
- Parking Areas



B47770 - 50W~200W











	 VOLT	 LUMENS	 BEAM	 DRIVER	 CCT	 PF	 COVER	 LxWxH	 LIFE
50W	120/230V	5000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	585x272x120mm	30,000H
80W	120/230V	8000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	585x272x120mm	30,000H
100W	120/230V	10000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	688x318x128mm	30,000H
120W	120/230V	12000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	688x318x128mm	30,000H
150W	120/230V	15000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	688x318x128mm	30,000H
180W	120/230V	18000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	764x344x130mm	30,000H
200W	120/230V	20000Lm	120°	Isolated	3000/4000/6500K	0.9	White/Black/Gray	764x344x130mm	30,000H

Street Light SOLAR




B47772 - 60W~100W

IP65 A+ Ra>80

								
	LUMENS	BATTERY CAPACITY	SOLAR PANEL	BEAM	CCT	FINISH		
60W	1020Lm	21700 3.7V 10AH	5V/13W/Polysilicon	90°	3000/4000/6500K	White/Black	567x195x76mm	30,000H
100W	1700Lm	21700 3.7V 20AH	5V/18W/Polysilicon	90°	3000/4000/6500K	White/Black	668x218x76mm	30,000H

Street Light SOLAR

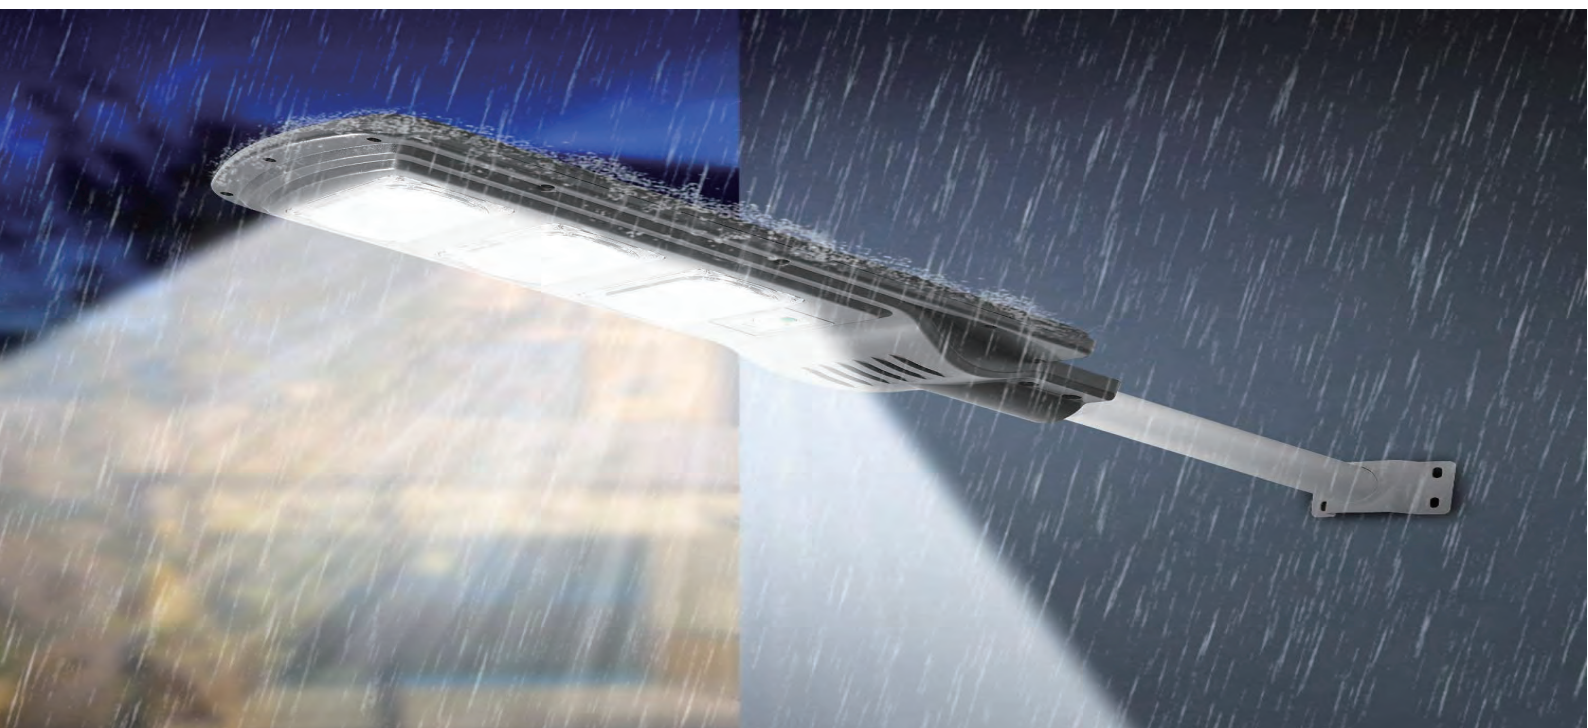

PIR Sensor
On/off sensor control

Higher Lumen
100Lm/W









ABS Housing
Ideal for solar outdoor lighting

Wider Lighting Area
120° beam angle

Polycrystalline Solar Panel
Photoelectric conversion rate up to 18%

1 B47778 **2** B47768


IP65 A+ Ra>80

	 LUMENS	 BATTERY CAPACITY	 SOLAR PANEL	 BEAM	 CCT	 FINISH	 LxWxH	 LIFE
20W	1120Lm	6V 9000mAH	6V/8W/Polysilicon	120°	3000/4000/6500K	White/Black	291x171mm	30,000H
40W	2100Lm	6V 12000mAH	6V/15W/Polysilicon	120°	3000/4000/6500K	White/Black	283x193mm	30,000H
60W	2520Lm	6V 16000mAH	6V/18W/Polysilicon	120°	3000/4000/6500K	White/Black	498x208mm	30,000H

ROOMLUX®






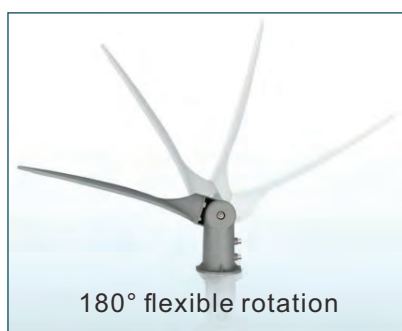


Outdoor & Industrial
my light. my choice

Street Light SOLAR



B47769 - 60W~200W


IP65 A+ Ra>80

	 LUMENS	 BATTERY CAPACITY	 SOLAR PANEL	 BEAM	 CCT	 FINISH	 LxWxH	 LIFE
60W	5100Lm	3.2V 12AH	6V/15W/Polysilicon	120°	3000/4000/6500K	White/Black	525x174x88mm	30,000H
100W	17000Lm	3.2V 24AH	6V/22W/Polysilicon	120°	3000/4000/6500K	White/Black	545x199x97mm	30,000H
200W	30000Lm	3.2V 36AH	6V/30W/Polysilicon	120°	3000/4000/6500K	White/Black	579x212x97mm	30,000H

Street Light SOLAR


Luminleds led chips

High brightness and light transmission.
Low light decay and long service life.

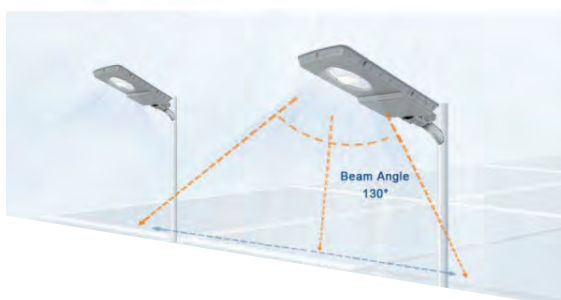

PROFESSIONAL LIGHTING DESIGN

130° wide lighting angle, can provide much wide effective
anti-glare design, more uniform lighting.

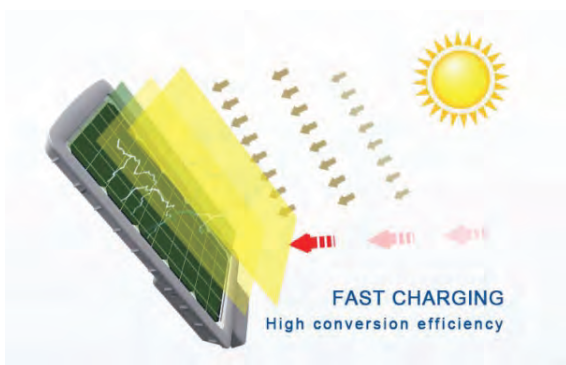

Monocrystalline silicon solar panel

Good photoelectric conversion
Charging faster and more efficiency



Long lasting



Improve 21.7% power
output efficiency



Up to 90% board
end conversion rate

B47771 - 100W

IP65

A+

Ra>80



LUMENS



BATTERY
CAPACITY



SOLAR PANEL



BEAM



CCT



FINISH




LxWxH



LIFE

100W	1500Lm	3.2V 5AH	5V/10W/Polysilicon	35°x175°	3000/4000/6500K	White/Black	500x202x37mm	30,000H
------	--------	----------	--------------------	----------	-----------------	-------------	--------------	---------


Street Light SOLAR

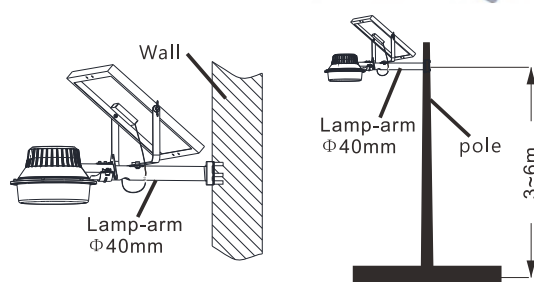

01 LIGHT SOURCE




High Brightness, small decline long life.



02 HEAT SINK



High Efficiency, High stability
Thicken die-cast aluminum lamp body.



B47773 - 300W

IP65

A+

Ra>80



LUMENS



BATTERY CAPACITY



SOLAR PANEL



BEAM



CCT



FINISH



LxWxH



LIFE

300W	4500Lm	3.2V 20AH	6V/25W/Polysilicon	120°	3000/4000/6500K	White/Black	295x240x100mm	30,000H
------	--------	-----------	--------------------	------	-----------------	-------------	---------------	---------



www.roomlux.com